

DATE NOVEMBER 22, 1988

U.S. SURVEY
No. 9252, ALASKA

SITUATED
12 MILES SOUTHEASTERLY OF THE VILLAGE OF
LIVENGOOD, ALASKA
AT MILE 51
ON THE ELLIOTT HIGHWAY

APPROXIMATE GEOGRAPHIC POSITION
OF
CORNER NO. 4, IS:
LATITUDE: 65° 24.0' NORTH (NAD 27)
LONGITUDE: 148° 13.8' WEST

AREA: 79.97 ACRES

SURVEYED
BY
BRIAN C. ANDERSON, CADASTRAL SURVEYOR
JUNE 12 THROUGH JUNE 18, 1987
UNDER SPECIAL INSTRUCTIONS
DATED DECEMBER 3, 1986
APPROVED MARCH 10, 1987


UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

This plat is strictly conformable to the approved field notes, and the survey, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

Robert H. Anderson 21 NOVEMBER 1988
Date

Deputy State Director for Cadastral Survey, Alaska

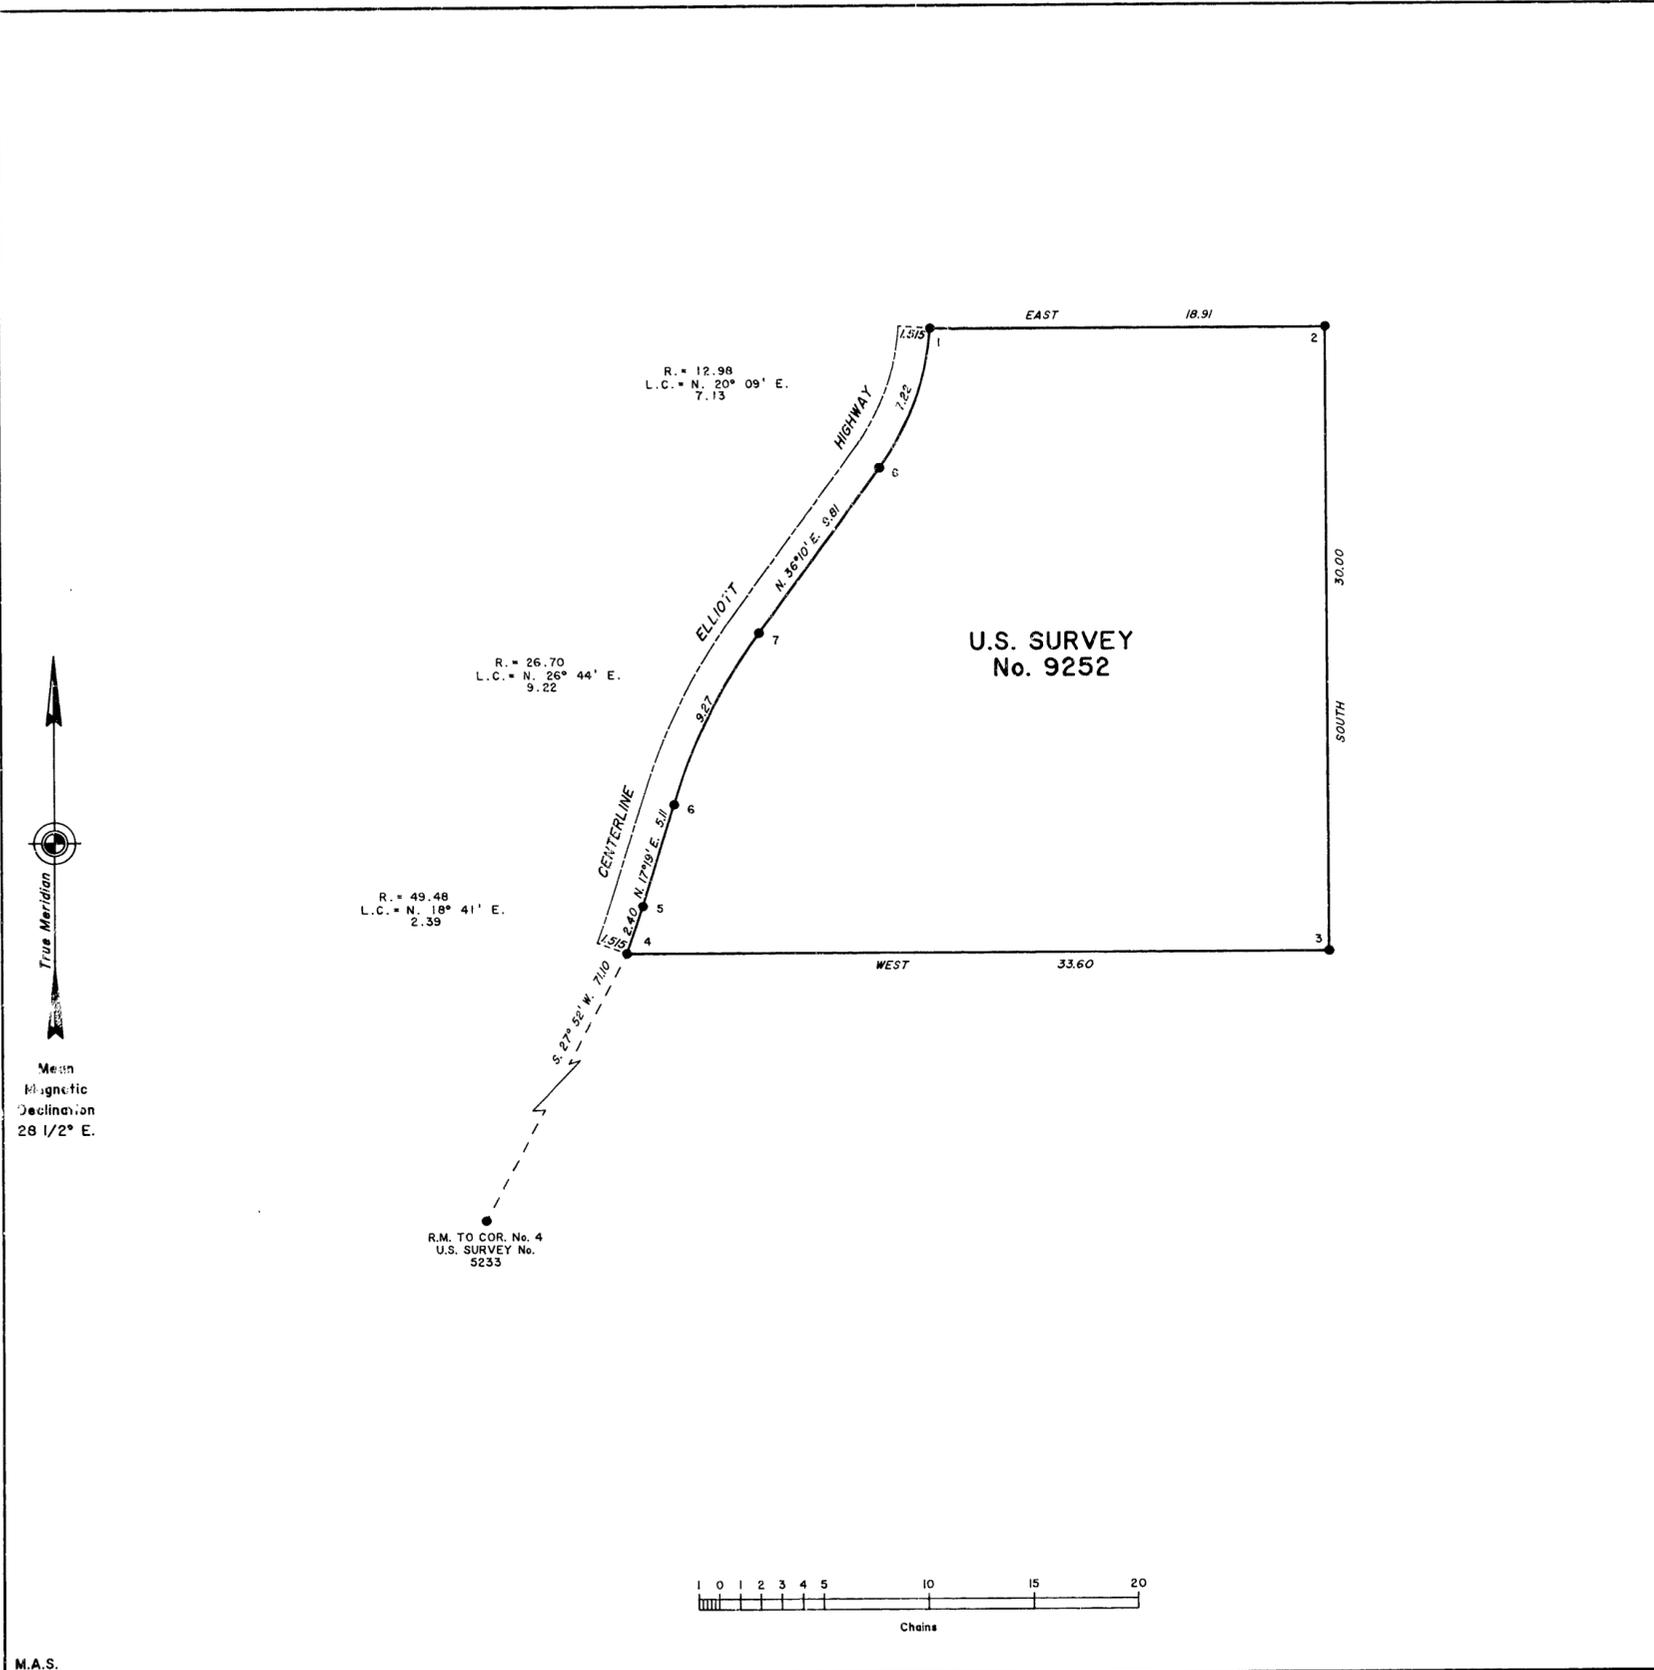

97
ORIGINAL

U-169

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD NOTES

OF

THE SURVEY OF

U.S. SURVEY NO. 9252

LOCATED

APPROXIMATELY 12 MILES SOUTHEASTERLY
OF THE VILLAGE OF LIVENGOOD, AT MILE 51
ON THE ELLIOTT HIGHWAY

THE APPROXIMATE GEOGRAPHIC POSITION OF

CORNER NO. 4, IS:

LATITUDE $65^{\circ}24.0'$ NORTH, LONGITUDE $148^{\circ}13.8'$ WEST

IN THE STATE OF ALASKA

EXECUTED BY

Brian C. Anderson, Cadastral Surveyor

Under special instructions dated December 3, 1986, approved March 10, 1987, which provided for the survey included under U.S. Survey No. 9252, and assignment instructions dated May 11, 1987.

Survey commenced: June 12, 1987

Survey completed: June 18, 1987

U.S. Survey No. 9252, Alaska

CHAINS

The following field notes are those of the survey of U.S. Survey No. 9252, Alaska.

U.S. Survey No. 5233 was surveyed by Gary S. Speight, Cadastral Surveyor, in 1974.

This survey was executed by Brian C. Anderson, Cadastral Surveyor, June 12 through June 18, 1987, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, special instructions dated December 3, 1986, and assignment instructions dated May 11, 1987.

Azimuth was determined from a tie to line 3-4, U.S. Survey No. 5233.

The approximate geographic position of corner No. 4, as determined from a tie to the reference monument to corner No. 4, U.S. Survey No. 5233, is:

Latitude 65°24.0' N., Longitude 148°13.8' W.
NAD 27

The magnetic declination was obtained from U.S. Geological Survey quadrangle map "LIVENGOOD (B-3)," Alaska, 1954 edition, with revisions in 1975, and indicates a mean value of 28 1/2° East.

Beginning at the point for cor. No. 1, on the approximate easterly right-of-way parallel to and 100 ft. from the centerline of the Elliott Highway.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

$\sqrt{\begin{array}{l} \text{C 1} \\ \text{S9252} \end{array}}$

1987

from which

A spruce, 4 ins. diam., bears N. 42° E., 24 lks. dist., mkd. X BT.

From this point, a BLM location tag, bears S. 14°38' W., 7.11 chs. dist., with no marks visible.

East, on line 1-2.

Over gently rolling land through birch and scattered spruce.

18.91 Point for cor. No. 2.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.


$\boxed{\begin{array}{l} \text{C 2} \\ \text{S9252} \end{array}}$

1987

from which

A birch, 10 ins. diam., bears S. 80° W., 39 lks. dist., mkd. S9252 C2 BT.

U.S. Survey No. 9252, Alaska

| | |
|--------|---|
| CHAINS | <p>A birch, 10 ins. diam., bears N. 19° W., 17 lks. dist., mkd. X BT.</p> <hr/> <p>South, on line 2-3.</p> <p>30.00 Point for cor. No. 3.</p> <p>Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with alum. cap mkd.</p> <div style="text-align: center;">  <p>1987</p> </div> <p>from which</p> <p>A birch, 8 ins. diam., bears N. 6° E., 20 lks. dist., mkd. X BT.</p> <p>A birch, 10 ins. diam., bears S. 86° E., 26 lks. dist., mkd. X BT.</p> <hr/> <p>West, on line 3-4.</p> <p>33.60 Point for cor. No. 4, at the intersection of the approximate easterly right-of-way, parallel to and 100 ft. from the centerline of the Elliott Highway.</p> <p>Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap mkd.</p> <div style="text-align: center;">  <p>1987</p> </div> <p>from which</p> <p>A birch, 4 ins. diam., bears N. 40° E., 19 lks. dist., mkd. X BT.</p> <p>A birch, 5 ins. diam., bears N. 30° W., 10 lks. dist., mkd. X BT.</p> <p>From this point, the reference monument to cor. No. 4, U.S. Survey No. 5233, monumented with an iron post, 2 1/2 ins. diam., firmly set, projecting 5 ins. above ground, with brass cap mkd. S5233 C4 RM 100 FT 1974 with an arrow pointing to the cor., bears S. 27°52' W., 71.10 chs. dist.</p> <hr/> <p>Thence on line 4-5, on the approximate easterly right-of-way, parallel to and 100 ft. from the centerline of the Elliott Highway, along the arc of a curve to the left having a radius of 49.48 chs., the chord of said arc bears N. 18°41' E., 2.39 chs. dist.</p> <p>2.40 Point for cor. No. 5, at the point of tangency of said curve.</p> <p>Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.</p> |
|--------|---|

U.S. Survey No. 9252, Alaska

CHAINS

C 5
S9252
1987

from which

A birch, 6 ins. diam., bears N. 79° E., 20 lks. dist., mkd. S9252 C5 BT.

A birch, 5 ins. diam., bears South, 18 lks. dist., mkd. X BT.

N. 17°19' E., on the approximate easterly right-of-way, line 5-6, parallel to and 100 ft. from the centerline of the Elliott Highway.

5.11 Point for cor. No. 6, at the point of curvature.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap mkd.

C 6
S9252
1987

from which

A birch, 8 ins. diam., bears S. 7° W., 34 lks. dist., mkd. X BT.

A birch, 6 ins. diam., bears N. 40° W., 19 lks. dist., mkd. X BT.

Thence on the approximate easterly right-of-way, line 6-7, parallel to and 100 ft. from the centerline of the Elliott Highway, along the arc of a curve to the right having a radius of 26.70 chs., the chord of said arc bears N. 26°44' E., 9.22 chs. dist.

9.27 Point for cor. No. 7, at the point of tangency for said curve.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

C 7
S9252
1987

from which

A birch, 8 ins. diam., bears N. 36° E., 11 lks. dist., mkd. X BT.

A birch, 8 ins. diam., bears S. 30° E., 16 lks. dist., mkd. X BT.

N. 36°10' E., on the approximate easterly right-of-way, line 7-8, parallel to and 100 ft. from the centerline of the Elliott Highway.

9.81 Point for cor. No. 8, at the point of curvature.

U.S. Survey No. 9252, Alaska

CHAINS

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd.

C 8
S9252
1987

from which

A birch, 10 ins. diam., bears S. 84° E., 43 lks. dist, mkd. S9252 C8 BT.

Thence on the approximate easterly right-of-way, line 8-1, parallel to and 100 ft. from the centerline of the Elliott Highway, along the arc of a curve to the left having a radius of 12.98 chs., the chord of said arc bears N. 20°09' E., 7.13 chs. dist.

7.22 Cor. No. 1, and point of beginning.

General Description

The land encompassed by this survey is located approximately 12 miles southeasterly of the village of Livengood, Alaska. The centerline of the Elliott Highway lies parallel to and 100 ft. westerly of the west boundary.

The land is gently rolling with an elevation of approximately 1200 ft., and supports birch and scattered spruce.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FIELD ASSISTANTS

| | |
|---------------------|----------------------|
| Daniel C. Wiesner | Student Trainee (LS) |
| Gustavo Trevino Jr. | Student Trainee (LS) |

CERTIFICATE OF SURVEY

I, Brian C. Anderson, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 3rd day of December, 1986, I have surveyed U.S. Survey No. 9252, located approximately 12 miles southeasterly of the village of Livengood, at mile 51 on the Elliott Highway, in the State of Alaska, which is represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in the specific manner described in the foregoing field notes.

10/13/88
(Date)

Brian C. Anderson
(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The foregoing field notes of the survey described in the Certificate of Survey above executed by Brian C. Anderson, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

2 NOVEMBER 1988
(Date)

Robert H. Anderson
(Deputy State Director for Cadastral Survey, Alaska)