

SUNDAY LAKES REMOTE RECREATIONAL CABIN SITES INDEX SHEET

CERTIFICATE OF PAYMENT OF TAXES

I hereby certify that all current taxes and special assessments through December 31, 2011 against the property, included in the subdivision, hereon have been paid.


Janet Lindmark 11/29/11
BOROUGH TAX COLLECTION OFFICIAL DATE

PLANNING AND LAND USE DIRECTOR'S CERTIFICATE

I certify that this subdivision plat has been found to comply with the Land Subdivision Regulations of the Matanuska-Susitna Borough and that the plat has been approved by the Platting Authority by Plat Resolution 2011-89-SUB Dated MARCH 17, 2011 and that this plat has been approved for recording in the Anchorage Recording District, Third Judicial District, State of Alaska.

Eileen McPherson (acting) 11/29/11
Planning Director Date

Attest Marilyn McLucie
Platting Clerk



CERTIFICATE OF OWNERSHIP AND DEDICATION

I, the undersigned, hereby certify that I am the Director, Division of Mining, Land and Water and that the State of Alaska is the owner of ASLS 2009-6 as shown hereon. I hereby approve this survey and plat for the State of Alaska and dedicate for public or private use as noted, all easements, public utility areas, and rights-of-way as shown and described hereon.

Dated: Nov 21, 2011 for Gerald Jennings
Director, Division of Mining, Land and Water



NOTARY'S ACKNOWLEDGEMENT

SUBSCRIBED AND SIGNED TO BEFORE ME THIS 21st DAY OF November, 2011

BY Gerald Jennings

Ronda Wilson

NOTARY FOR THE STATE OF ALASKA
MY COMMISSION EXPIRES with office

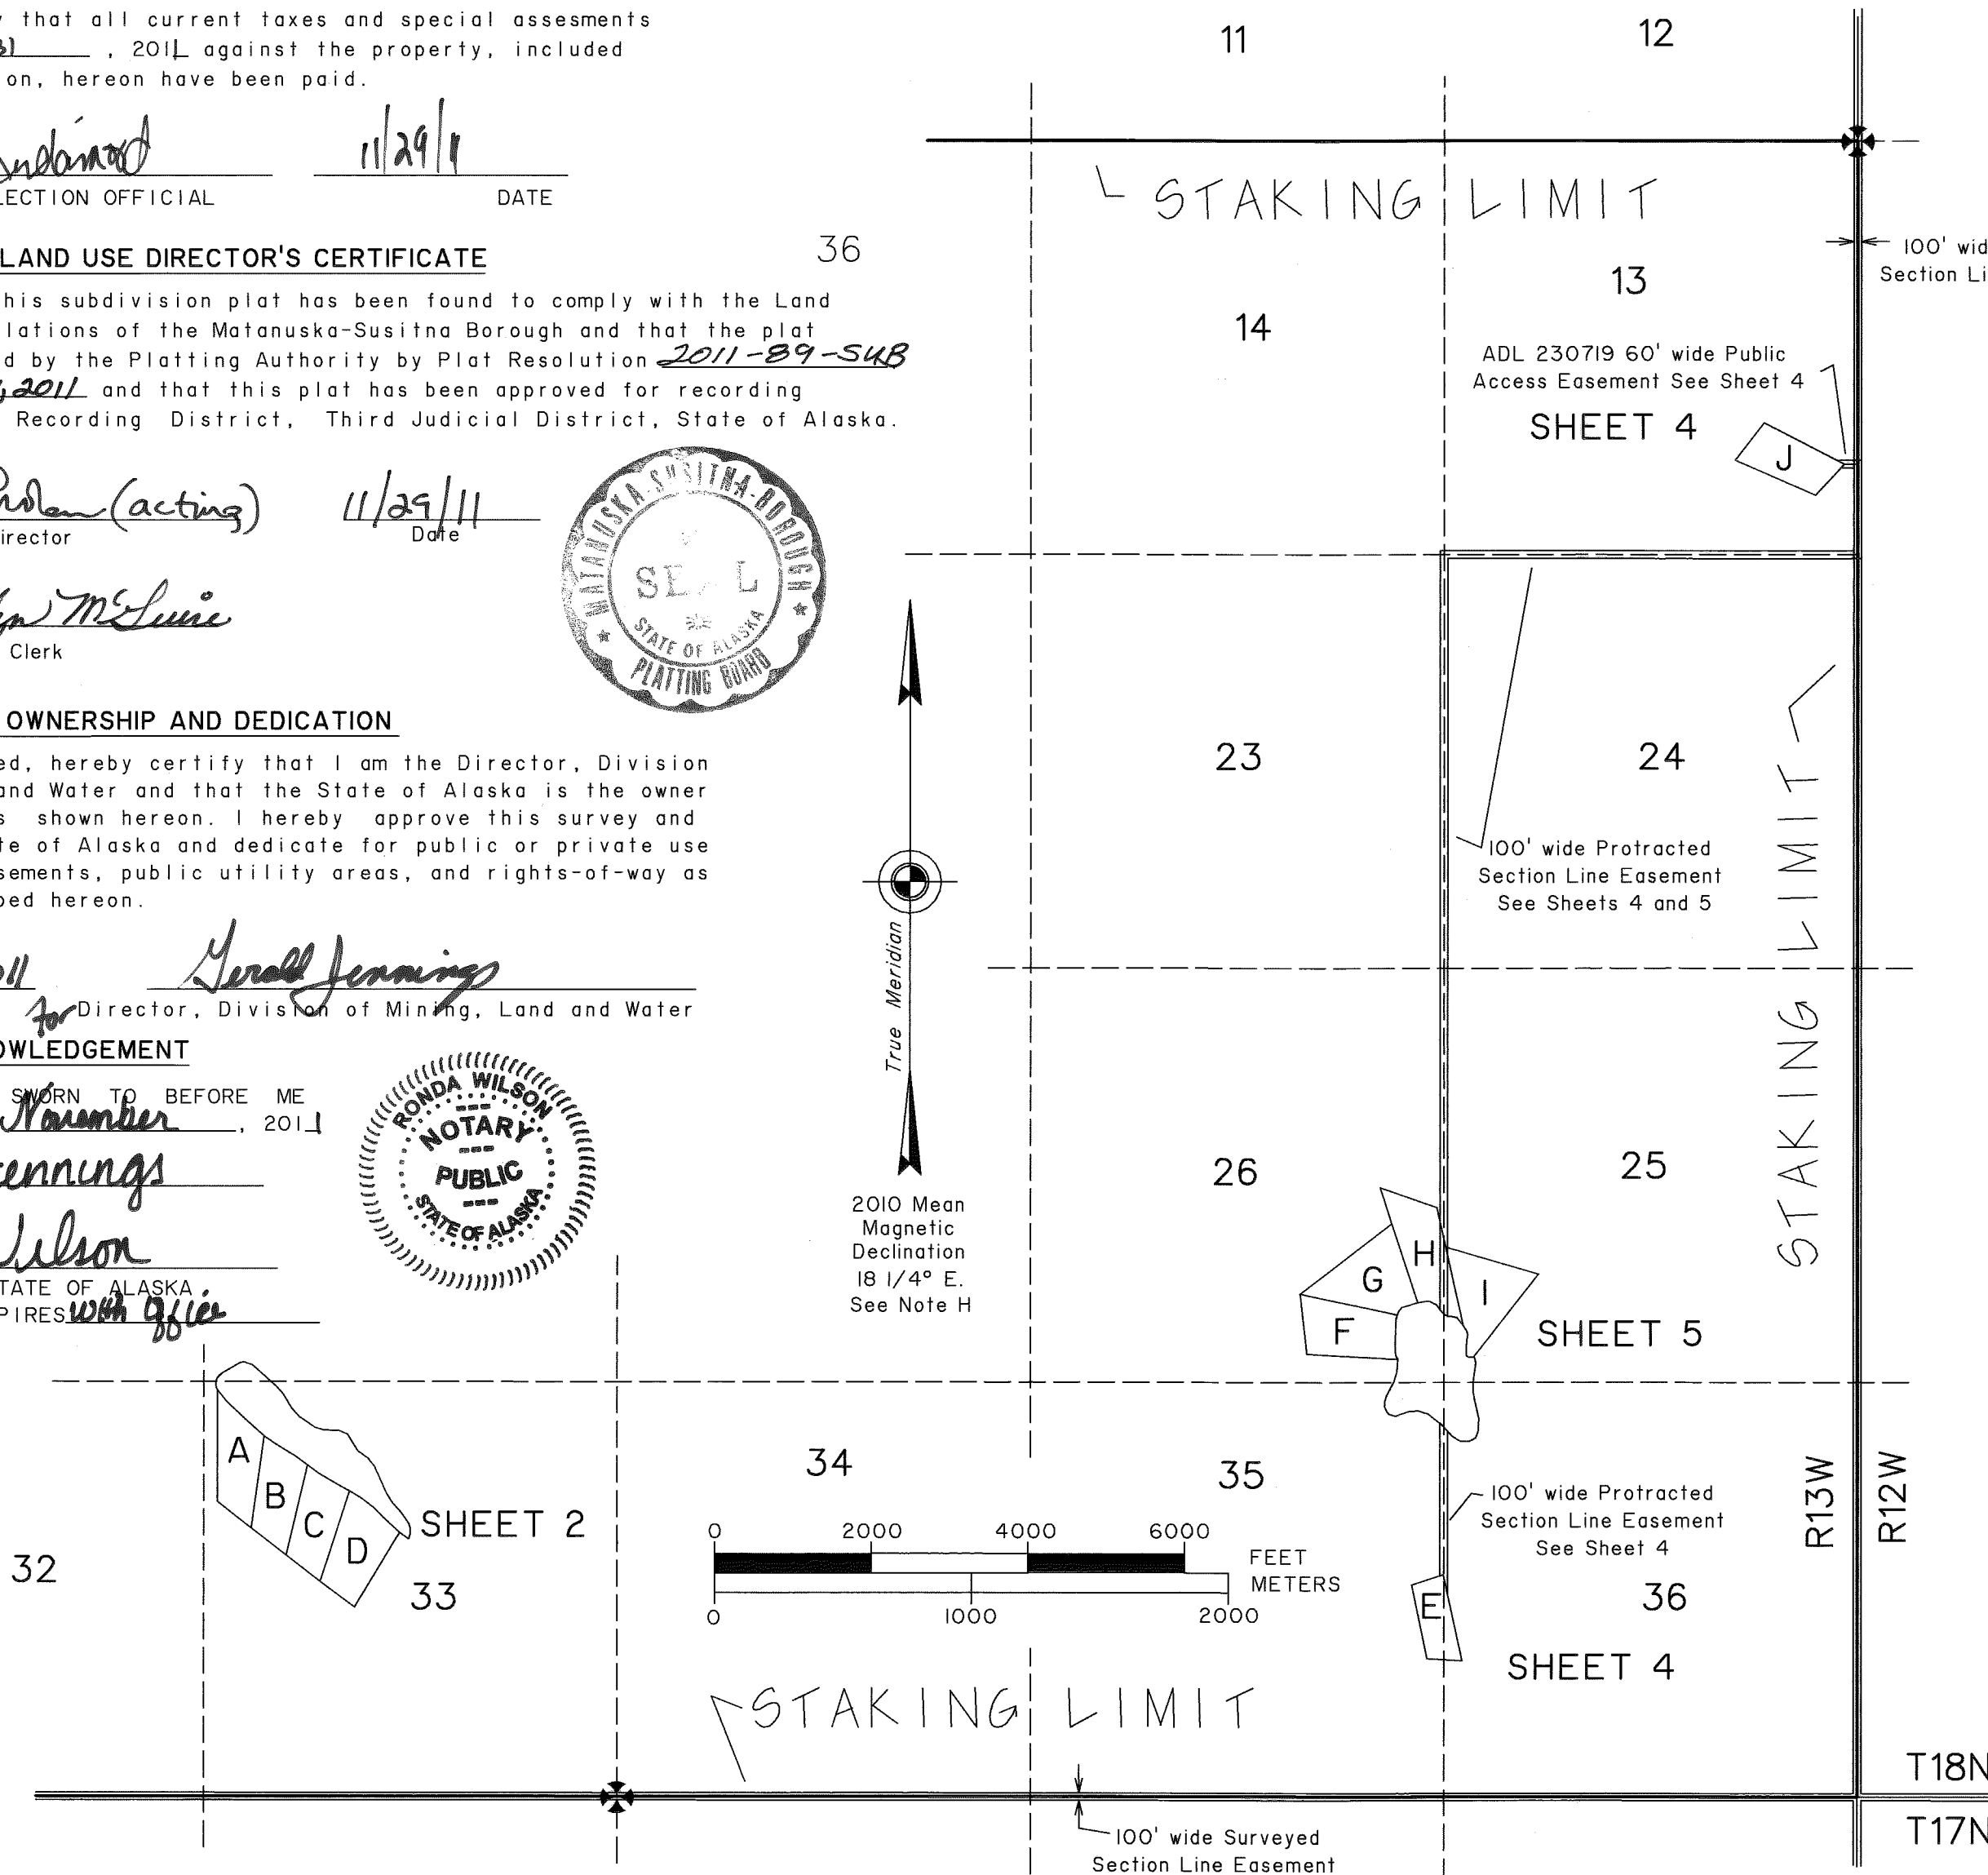


SURVEYOR'S CERTIFICATE

I hereby certify that I am properly registered and licensed to practice land surveying in the State of Alaska, that this plat represents a survey made by me or under my direct supervision, that the monuments shown hereon exist as described, and that all dimensions and other details are correct.

Date: June 2, 2011 Registration No. LS-7045

James E. Mitchell
James E. Mitchell, Registered Land Surveyor

TYPICAL PRIMARY MONUMENT



LEGEND

- ⊗ BLM/GLO Monument Recovered
- ⊙ Primary monument set this survey
- ⓪ Corner Designation
- Surveyed Line
- Unsurveyed Line



15	14	13	18	17	16	15	14	13	18
22	23	24	19	20	THIS SURVEY		23	24	19
27	26	25	30	29	28	27	26	25	30
34	35	36	31	32	33	34	35	36	31
3	2	1	6	5	4	3	2	1	6
10	11	12	7	8	9	10	11	12	7
15	14	13	18	17	THIS SURVEY		14	13	18
22	23	24	19	20	21	22	23	24	19

VICINITY MAP

Source: USGS DLG Tyonek C5
Scale 1" = 2 miles

NOTES

- A. This survey was accomplished in accordance with AS 38.05.600, GSC 763 RRCS-SI 2009-6.
- B. All bearings shown are true bearings as oriented to the Basis of Bearing and distances shown are reduced to horizontal field distances.
- C. The accuracy of the survey is greater than 1:5000.
- D. All parcels of land owned by the State of Alaska, located within 50.00 feet of, or bisected by a surveyed or protracted section line, are subject to a 50 foot(50') easement, each side of the section line, which is reserved to the State of Alaska for public highways under A.S. 19.10.010.
- E. The existing lessee's claim corners were recovered and used to control the location of the tract boundary.
- F. BASIS OF BEARING The Basis of Bearing for this plat was determined by high precision GPS survey using Topcon Hiper receivers, differentially corrected and processed using Trimble Business Center, Version 1.1 processing software.
- G. BASIS OF COORDINATES NAD27 The coordinates depicted on the plats are based on a tie to a monument of record using high precision GPS survey techniques. The bearing and distance obtained were applied to the record NAD27 position to compute the NAD27 positions of a corner of each tract.
- H. NAD83 coordinates were derived by high precision GPS survey using Topcon Hiper receivers, differentially corrected and processed using Trimble Business Center, Version 1.1 processing software. The adjustment was constrained to an NGS OPUS solution for PBO station AC51 (CORS96) (EPOCH 2003.0)
- I. The natural meanders of the line of ordinary high water forms the true bounds of portions of Tracts A-D, and F-I. The approximate line of OHW as shown, is for area computations only, with the true corners being on the extension of the sidelines and their intersection with the natural meanders.
- J. The 2010 mean magnetic declination was determined by calculation using the Magnetic Declination Calculator (MIRP) maintained by NOAA at <http://www.ngdc.noaa.gov/geomagmodels/struts/calDeclination>
- K. The Matanuska-Susitna Borough is not responsible for road construction or road maintenance.
- L. The Matanuska-Susitna Borough is not responsible to construct or maintain access easements within the staking area.
- M. There is an 100 foot building setback from all streams and all other water bodies determined to be public or navigable.
- N. Land Use Note: There may be Federal, State and local requirements governing land use. It is the responsibility of the individual parcel owner to obtain a determination whether such requirements apply to the development of parcels shown hereon.
- O. Wastewater Note: No individual water supply system or sewage disposal system shall be permitted on any lot unless such system is located, constructed and equipped in accordance with the requirements, standards and recommendations of the State of Alaska, Department of Environmental Conservation, which govern those systems.

1 Meter = 3.280833 U.S. Survey Feet 1 U.S. acre = 0.4047 hectare

DATE OF SURVEY: BEGINNING: 9/10/2010 ENDING: 10/08/2010	NAME OF SURVEYOR: The Crazy Mountains JV 2000 E. Dowling Road, #6 Anchorage, AK 99507
STATE OF ALASKA DEPARTMENT OF NATURAL RESOURCES DIVISION OF MINING LAND AND WATER Anchorage, Alaska	
ALASKA STATE LAND SURVEY NO. 2009-6 SUNDAY LAKES REMOTE RECREATIONAL CABIN SITES CREATING TRACTS A THROUGH J WITHIN UNSURVEYED SECTIONS 13, 25, 26, 33, 35 and 36, T. 18 N., R. 13 W., SEWARD MERIDIAN, ALASKA ANCHORAGE RECORDING DISTRICT Containing 164.16 Acres	
DRAWN BY: JEM DATE: 10/29/2010	APPROVAL RECOMMENDED <u>William S. Brown</u> For 11/16/11 STATEWIDE PLATTING SUPERVISOR DATE
SCALE: 1" = 2000'	CHECKED BY: KJL File No. ASLS 20090006

29	T18N R13W	27	26	25
THIS SHEET	28	34	35	36
32	33	34	35	36
5	4	3	2	1
	T17N R13W			
8	9	10	11	12
			JUDD LAKE	

VICINITY MAP
Source: USGS DLG TYONEK C5
Scale 1" = 1 mile

MEANDERS


- A1 N. 47°57'11" W. 278.35'
- A2 N. 47°11'34" W. 360.72'
- A3 N. 38°49'25" W. 199.68'
- B1 N. 53°56'37" W. 197.65'
- B2 N. 58°26'11" W. 281.15'
- B3 N. 55°56'46" W. 188.57'
- C1 N. 61°5'24" W. 183.19'
- C2 N. 59°29'37" W. 275.79'
- C3 N. 53°36'26" W. 172.54'
- D1 N. 47°47'7" W. 288.48'
- D2 N. 44°57'24" W. 183.23'
- D3 N. 52°31'19" W. 180.63'
- D4 N. 59°15'29" W. 180.15'

Note: There are no Lessees for:
Tract A, ADL 230661
Tract B, ADL 230664
Tract C, ADL 230663
Tract D, ADL 230662

Flood Hazard Note for the Unnamed Lake bordering Tracts A, B, C, and D.
No potential exists that any part of the platted area of Tracts A, B, C, and D will be inundated by the Base Flood Event in a given year.
In September 2010 the lake level was 2092.0 ft. - 4.8 feet lower than the BM. Based on the topography, the steep shoreline, the outfall to the south, and the limited area draining into the lake the BASE FLOOD ELEVATION of the unnamed lake is 2092.0 feet
A primary benchmark (BM) was established at WCMC CI Tract A. An elevation of 2096.8 ft. was assumed for the BM. The plat depicts elevations for selected primary monuments relative to the BM derived from GPS measurements using the GEOID 09 model.

1 Meter = 3.280833 U.S. Survey Feet | U.S. acre = 0.4047 hectare

DATE OF SURVEY: BEGINNING: 9/10/2010 10/08/2010	NAME OF SURVEYOR: The Crazy Mountains JV 2000 E. Dowling Road, #6 Anchorage, AK 99507
STATE OF ALASKA DEPARTMENT OF NATURAL RESOURCES DIVISION OF MINING LAND AND WATER Anchorage, Alaska	
ALASKA STATE LAND SURVEY NO. 2009-6 SUNDAY LAKES REMOTE RECREATIONAL CABIN SITES CREATING TRACTS A THROUGH J WITHIN UNSURVEYED SECTIONS 13, 25, 26, 33, 35 and 36, T. 18 N., R. 13 W., SEWARD MERIDIAN, ALASKA ANCHORAGE RECORDING DISTRICT Containing 164.16 Acres	
DRAWN BY: JEM	APPROVAL RECOMMENDED <i>William S. Brown</i> for 11/10/11 STATEWIDE PLATTING SUPERVISOR DATE
DATE : 11/10/2010	CHECKED BY: KJL
SCALE: 1" = 200'	File No. ASLS 20090006

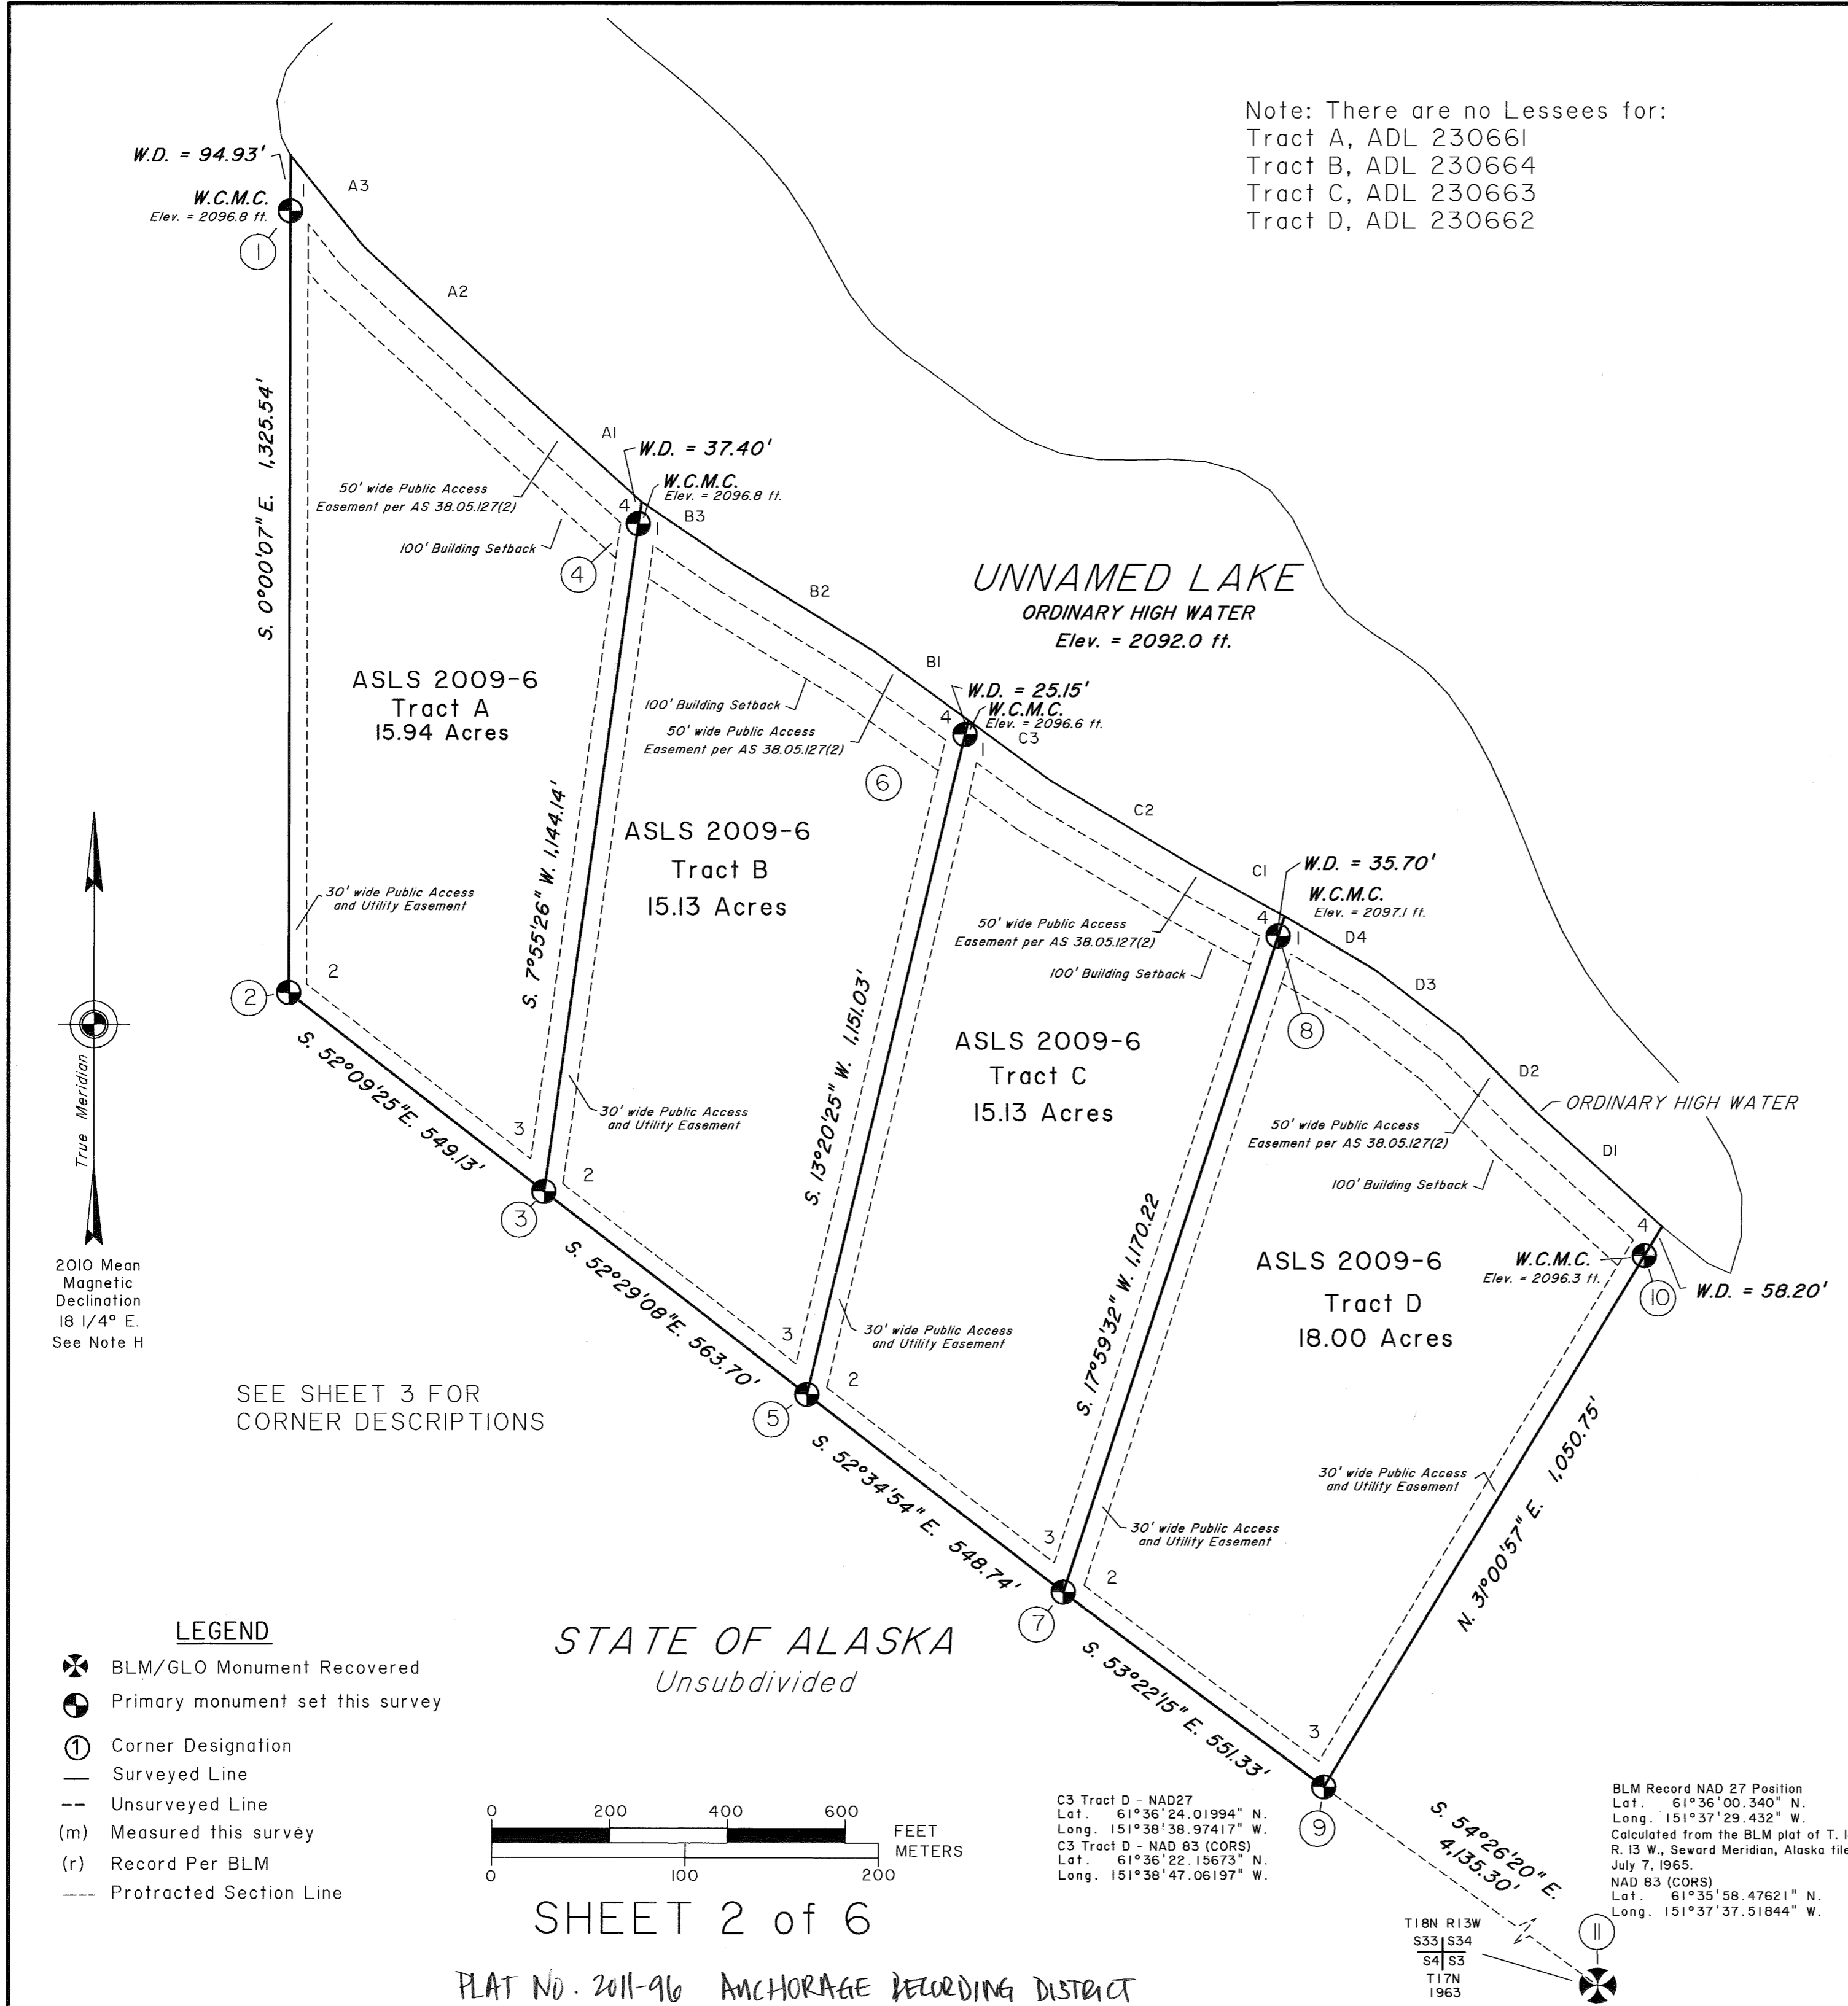

1 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
WC
MC
TR A
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 11/2° W., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears S. 86 1/2° W., 25.0 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

2 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR A
C2
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 34° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears S. 64° E., 25.0 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

3 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR A
C3
TR B
C2
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 35° 1/2 E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 53 1/2° W., 25.0 ft. dist.

Place a grey DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

4 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
WC
MC
C4
TR A
TR B
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 7 3/4° W., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 85 3/4° W., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

5 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR B
C3
TR C
C2
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 60° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.4 ft., bears N. 49 1/2° W., 25.4 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

6 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
WC
MC
C4
TR B
TR C
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 30 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 5 3/4° W., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 30 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 79° W., 25.0 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

7 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR C
C3
TR D
C2
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 31.9 ft., bears N. 41° E., 31.9 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 45 1/2° W., 30.0 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

8 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, and in a collar of stone, with alum. cap mkd. as shown. From which

ASLS 2009-6
WC
MC
C4
TR C
TR D
RLS 7045 2010

A steel rebar, 5/8 in. diam., 34 ins. long, driven 31 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 21 1/2° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 26 ins. long, driven 31 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears S. 65 1/2° W., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

9 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR D
C3
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 7° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 36 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 87 1/2° E., 25.0 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

10 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
WC
MC
C4
TR D
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 26° W., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 64 1/2° W., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

11 Recovered an iron post, 2 1/2 ins. diam., loosely set and leaning, reset, now firmly set projecting 4 ins. above the ground, with brass cap mkd. as shown.

T 18 N R 13 W
S 33 S 34
S 4 S 3
T 17 N
1963

No evidence of pits, an upright, orange 55 gal. drum is 3 ft. SE of the corner.

12 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR E
C1
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 30 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 24.8 ft., bears S. 12 1/2° E., 24.8 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 22.1 ft., bears S. 71° 1/2 W., 22.1 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

13 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR E
C2
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 29° E., 20.5 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 13° 1/2 W., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

14 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR E
C3
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 24.2 ft., bears S. 43 1/2° E., 24.2 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 33.2 ft., bears S. 42 1/4° W., 33.2 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

15 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR E
C4
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 35° W., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 55° E., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

29 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR J
C1
RLS 7045 2010

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 14° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 82° W., 25.0 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

30 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR J
C2
RLS 7045 2010

A spruce, 6 ins. diam., bears S. 47 1/2° E., 122.0 ft. dist., marked X BT.

A spruce, 8 ins. diam., bears S. 26 1/2° W., 18.1 ft. dist., marked X BT.

A spruce, 9 ins. diam., bears S. 74 1/2° W., 20.2 ft. dist., marked X BT.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

31 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR J
C3
RLS 7045 2010

A spruce, 15 ins. diam., bears N. 65° W., 14.9 ft. dist., marked X BT.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 61° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 23° W., 25.0 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

32 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

ASLS 2009-6
TR J
C4
RLS 7045 2010

A spruce, 4 ins. diam., bears S. 10° W., 14.9 ft. dist., mkd. X BT.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 82° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 6° W., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

33 Recovered an iron post, 2 1/2 ins. diam., firmly set projecting 3 ins. above the ground, with brass cap mkd. as shown. From which existing bearing trees

T 18 N
R 13 W | R 12 W
S 12 S 7
S 13 S 18
1963

A spruce, 10 ins. diam., bears N. 71° E., 57.8 ft. dist., with healed blaze. (Record 58.7 ft.)

A spruce, 14 ins. diam., bears S. 25 1/2° E., 69.3 ft. dist., with healed blaze.

A spruce, 10 ins. diam., bears S. 23° W., 34.0 ft. dist., with healed blaze.

A spruce, 8 ins. diam., bears N. 86° W., 48.3 ft. dist., with healed blaze. (Record N. 60° W.)

SHEET 3 of 6

1 Meter = 3.280833 U.S. Survey Feet 1 U.S. acre = 0.4047 hectare

DATE OF SURVEY: BEGINNING: 9/10/2010 10/08/2010	NAME OF SURVEYOR: The Crazy Mountains JV 2000 E. Dowling Road, #6 Anchorage, AK 99507
STATE OF ALASKA DEPARTMENT OF NATURAL RESOURCES DIVISION OF MINING LAND AND WATER Anchorage, Alaska	
ALASKA STATE LAND SURVEY NO. 2009-6 SUNDAY LAKES REMOTE RECREATIONAL CABIN SITES CREATING TRACTS A THROUGH J WITHIN UNSURVEYED SECTIONS 13, 25, 26, 33, 35 and 36, T. 18 N., R. 13 W., SEWARD MERIDIAN, ALASKA ANCHORAGE RECORDING DISTRICT Containing 164.16 Acres	
DRAWN BY: JEM DATE : 11/10/2010 SCALE: 1" = 200'	APPROVAL RECOMMENDED <i>William S. Brown</i> For <i>11/14/11</i> STATEWIDE PLATTING SUPERVISOR CHECKED BY: KJL File No. ASLS 20090006

PLAT NO. 2011-96 ANCHORAGE RECORDING DISTRICT

BLM Record NAD 27 Position
 Lat. 61°39'28.292" N.
 Long. 151°32'02.020" W.
 Calculated from the BLM plat of T. 18 N.,
 R. 13 W., Seward Meridian, Alaska filed
 July 7, 1965.
 NAD 83 (CORS)
 Lat. 61°39'26.41165" N.
 Long. 151°32'10.31963" W.

T18N
 R13W R12W
 S12 S7
 S13 S18
 1963

APPLICANT CERTIFICATE

I, THE UNDERSIGNED, HEREBY CERTIFY THAT I AM THE APPLICANT OF TRACT J ASLS 2009-6, ADL 230463 AS SHOWN HEREON. I HEREBY APPROVE THIS SURVEY AND PLAT.

DATE: Sept 15, 2011
Thomas Fenger


THOMAS FENGER
 14950 TERRACE LANE
 EAGLE RIVER, ALASKA 99577

NOTARY'S ACKNOWLEDGEMENT

SUBSCRIBED AND SWORN TO BEFORE ME THIS 15 DAY OF SEPTEMBER, 2011

BY Thomas Fenger
 APPLICANT

Joseph L. Povodack
 NOTARY FOR THE STATE OF ALASKA
 MY COMMISSION EXPIRES with office



CI Tract J - NAD27
 Lat. 61°38'52.91332" N.
 Long. 151°32'26.72498" W.
 CI Tract J - NAD 83 (CORS)
 Lat. 61°38'51.03213" N.
 Long. 151°32'35.02519" W.

STATE OF ALASKA
 Unsubdivided

At Intersection with Twp. Line
 Lat. 61°38'47.697" N.
 Long. 151°32'01.020" W.
 NAD27
 Lat. 61°38'45.816" N.
 Long. 151°32'10.320" W.
 NAD83 (CORS)

ADL 230719
 60' wide Public Access Easement

ASLS 2009-6
 Tract J
 14.44 Acres

SEE SHEET 3 FOR
 CORNER DESCRIPTIONS

STATE OF ALASKA
 Unsubdivided

100' Wide Surveyed Section Line Easement
 50' each side of the surveyed section line.

Cor. of Secs. 13, 14, 23 and 24
 Lat. 61°38'36.309" N.
 Long. 151°33'50.236" W.
 NAD 27 (CORS)
 Lat. 61°38'34.428" N.
 Long. 151°33'59.538" W.
 NAD 83 (CORS)

Sec. 13

100' Wide Protracted Section Line Easement
 50' each side of the protracted section line.

Sec. 14

Sec. 23

Sec. 24

Cor. of Secs. 13, 18, 19 and 24
 Lat. 61°38'36.309" N.
 Long. 151°32'01.020" W.
 NAD 27
 Lat. 61°38'34.428" N.
 Long. 151°32'10.320" W.
 NAD 83 (CORS)

100' Wide Protracted Section Line Easement
 50' each side of the protracted section line.

Flood Hazard Note for Tract J
 No potential exists that any part of the platted area of Tract J will be inundated by the Base Flood Event in a given year.

PLAT NO. 2011-96 ANCHORAGE RECORDING DISTRICT

Tract I
 UNNAMED LAKE
 See Sheet 5

At Intersection with Ordinary High Water
 Lat. 61°36'46.704" N.
 Long. 151°33'51.350" W.
 NAD27
 Lat. 61°36'44.841" N.
 Long. 151°33'59.431" W.
 NAD83 (CORS)

100' Wide Protracted Section Line Easement
 50' each side of the protracted section line.

STATE OF ALASKA
 Unsubdivided

True Meridian
 2010 Mean Magnetic Declination
 18 1/4° E.
 See Note H

ASLS 2009-6
 Tract E
 10.27 Acres


SEE SHEET 3 FOR
 CORNER DESCRIPTIONS

STATE OF ALASKA
 Unsubdivided

C4 Tract E - NAD27
 Lat. 61°36'17.67147" N.
 Long. 151°33'55.78469" W.
 C4 Tract E - NAD 83 (CORS)
 Lat. 61°36'15.80810" N.
 Long. 151°34'03.86612" W.

T18N R13W
 S33 S34
 S4 S3
 T17N
 1963

BLM Record NAD 27 Position
 Lat. 61°36'00.340" N.
 Long. 151°37'29.432" W.
 Calculated from the BLM plat of T. 18 N.,
 R. 13 W., Seward Meridian, Alaska filed
 July 7, 1965.
 NAD 83 (CORS)
 Lat. 61°35'58.47621" N.
 Long. 151°37'37.51844" W.



SHEET 4 of 6

Flood Hazard Note for Tract E
 No potential exists that any part of the platted area of Tract E will be inundated by the Base Flood Event in a given year.

16	15	14	13	18
		THIS SHEET		
21	T18N R13W 22	23	24	19
28	27	26	25	30
33	34	35	36	31
	THIS SHEET			

VICINITY MAP

Source: USGS DLG TYONEK C4, C5, D4 and D5
 Scale 1" = 2 mile

APPLICANT CERTIFICATE

I, THE UNDERSIGNED, HEREBY CERTIFY THAT I AM THE APPLICANT OF TRACT E ASLS 2009-6, ADL 230480 AS SHOWN HEREON. I HEREBY APPROVE THIS SURVEY AND PLAT.

DATE: 3 Nov 2011
John Hood

JOHN HOOD
 5006 MILLS DRIVE
 ANCHORAGE, ALASKA 99508

NOTARY'S ACKNOWLEDGEMENT

SUBSCRIBED AND SWORN TO BEFORE ME THIS 3 DAY OF November, 2011

BY John Hood
 APPLICANT

Marta Mueller
 NOTARY FOR THE STATE OF ALASKA
 MY COMMISSION EXPIRES with office



LEGEND

- ⊗ BLM/GLO Monument Recovered
- ⊙ Primary monument set this survey
- ① Corner Designation
- Surveyed Line
- - - Unsurveyed Line
- (m) Measured this survey
- (r) Record Per BLM
- - - Protracted Section Line
- Surveyed Section Line

1 Meter = 3.280833 U.S. Survey Feet | U.S. acre = 0.4047 hectare

DATE OF SURVEY: BEGINNING: 9/10/2010 10/08/2010	NAME OF SURVEYOR: The Crazy Mountains JV 2000 E. Dowling Road, #6 Anchorage, AK 99507
STATE OF ALASKA DEPARTMENT OF NATURAL RESOURCES DIVISION OF MINING LAND AND WATER Anchorage, Alaska	
ALASKA STATE LAND SURVEY NO. 2009-6 SUNDAY LAKES REMOTE RECREATIONAL CABIN SITES CREATING TRACTS A THROUGH J WITHIN UNSURVEYED SECTIONS 13, 25, 26, 33, 35 and 36, T. 18 N., R. 13 W., SEWARD MERIDIAN, ALASKA ANCHORAGE RECORDING DISTRICT Containing 164.16 Acres	
DRAWN BY: JEM DATE: 11/10/2010 SCALE: 1" = 200'	APPROVAL RECOMMENDED <i>William S. Brown For</i> 11/16/11 STATEWIDE PLATTING SUPERVISOR DATE CHECKED BY: KJL File No. ASLS 2009006


Flood Hazard Note for the Unnamed Lake bordering Tracts F,G,H and I.

No potential exists that any part of the platted area of Tracts F, G, H, and I will be inundated by the Base Flood Event in a given year.


In September 2010 the lake level was 1877.0 ft. - 4.3 feet lower than the BM. Based on the topography, the steep shoreline, the outfall to the south, and the limited area draining into the lake the BASE FLOOD ELEVATION of the unnamed lake is 1877.0 feet.

A primary benchmark (BM) was established at WCMC CI Tract F. An elevation of 1881.3 ft. was assumed for the BM. The plat depicts elevations for selected primary monuments relative to the BM derived from GPS measurements using the GEOID 09 model.

STATE OF ALASKA
Unsubdivided



2010 Mean Magnetic Declination
18 1/4° E.
See Note H

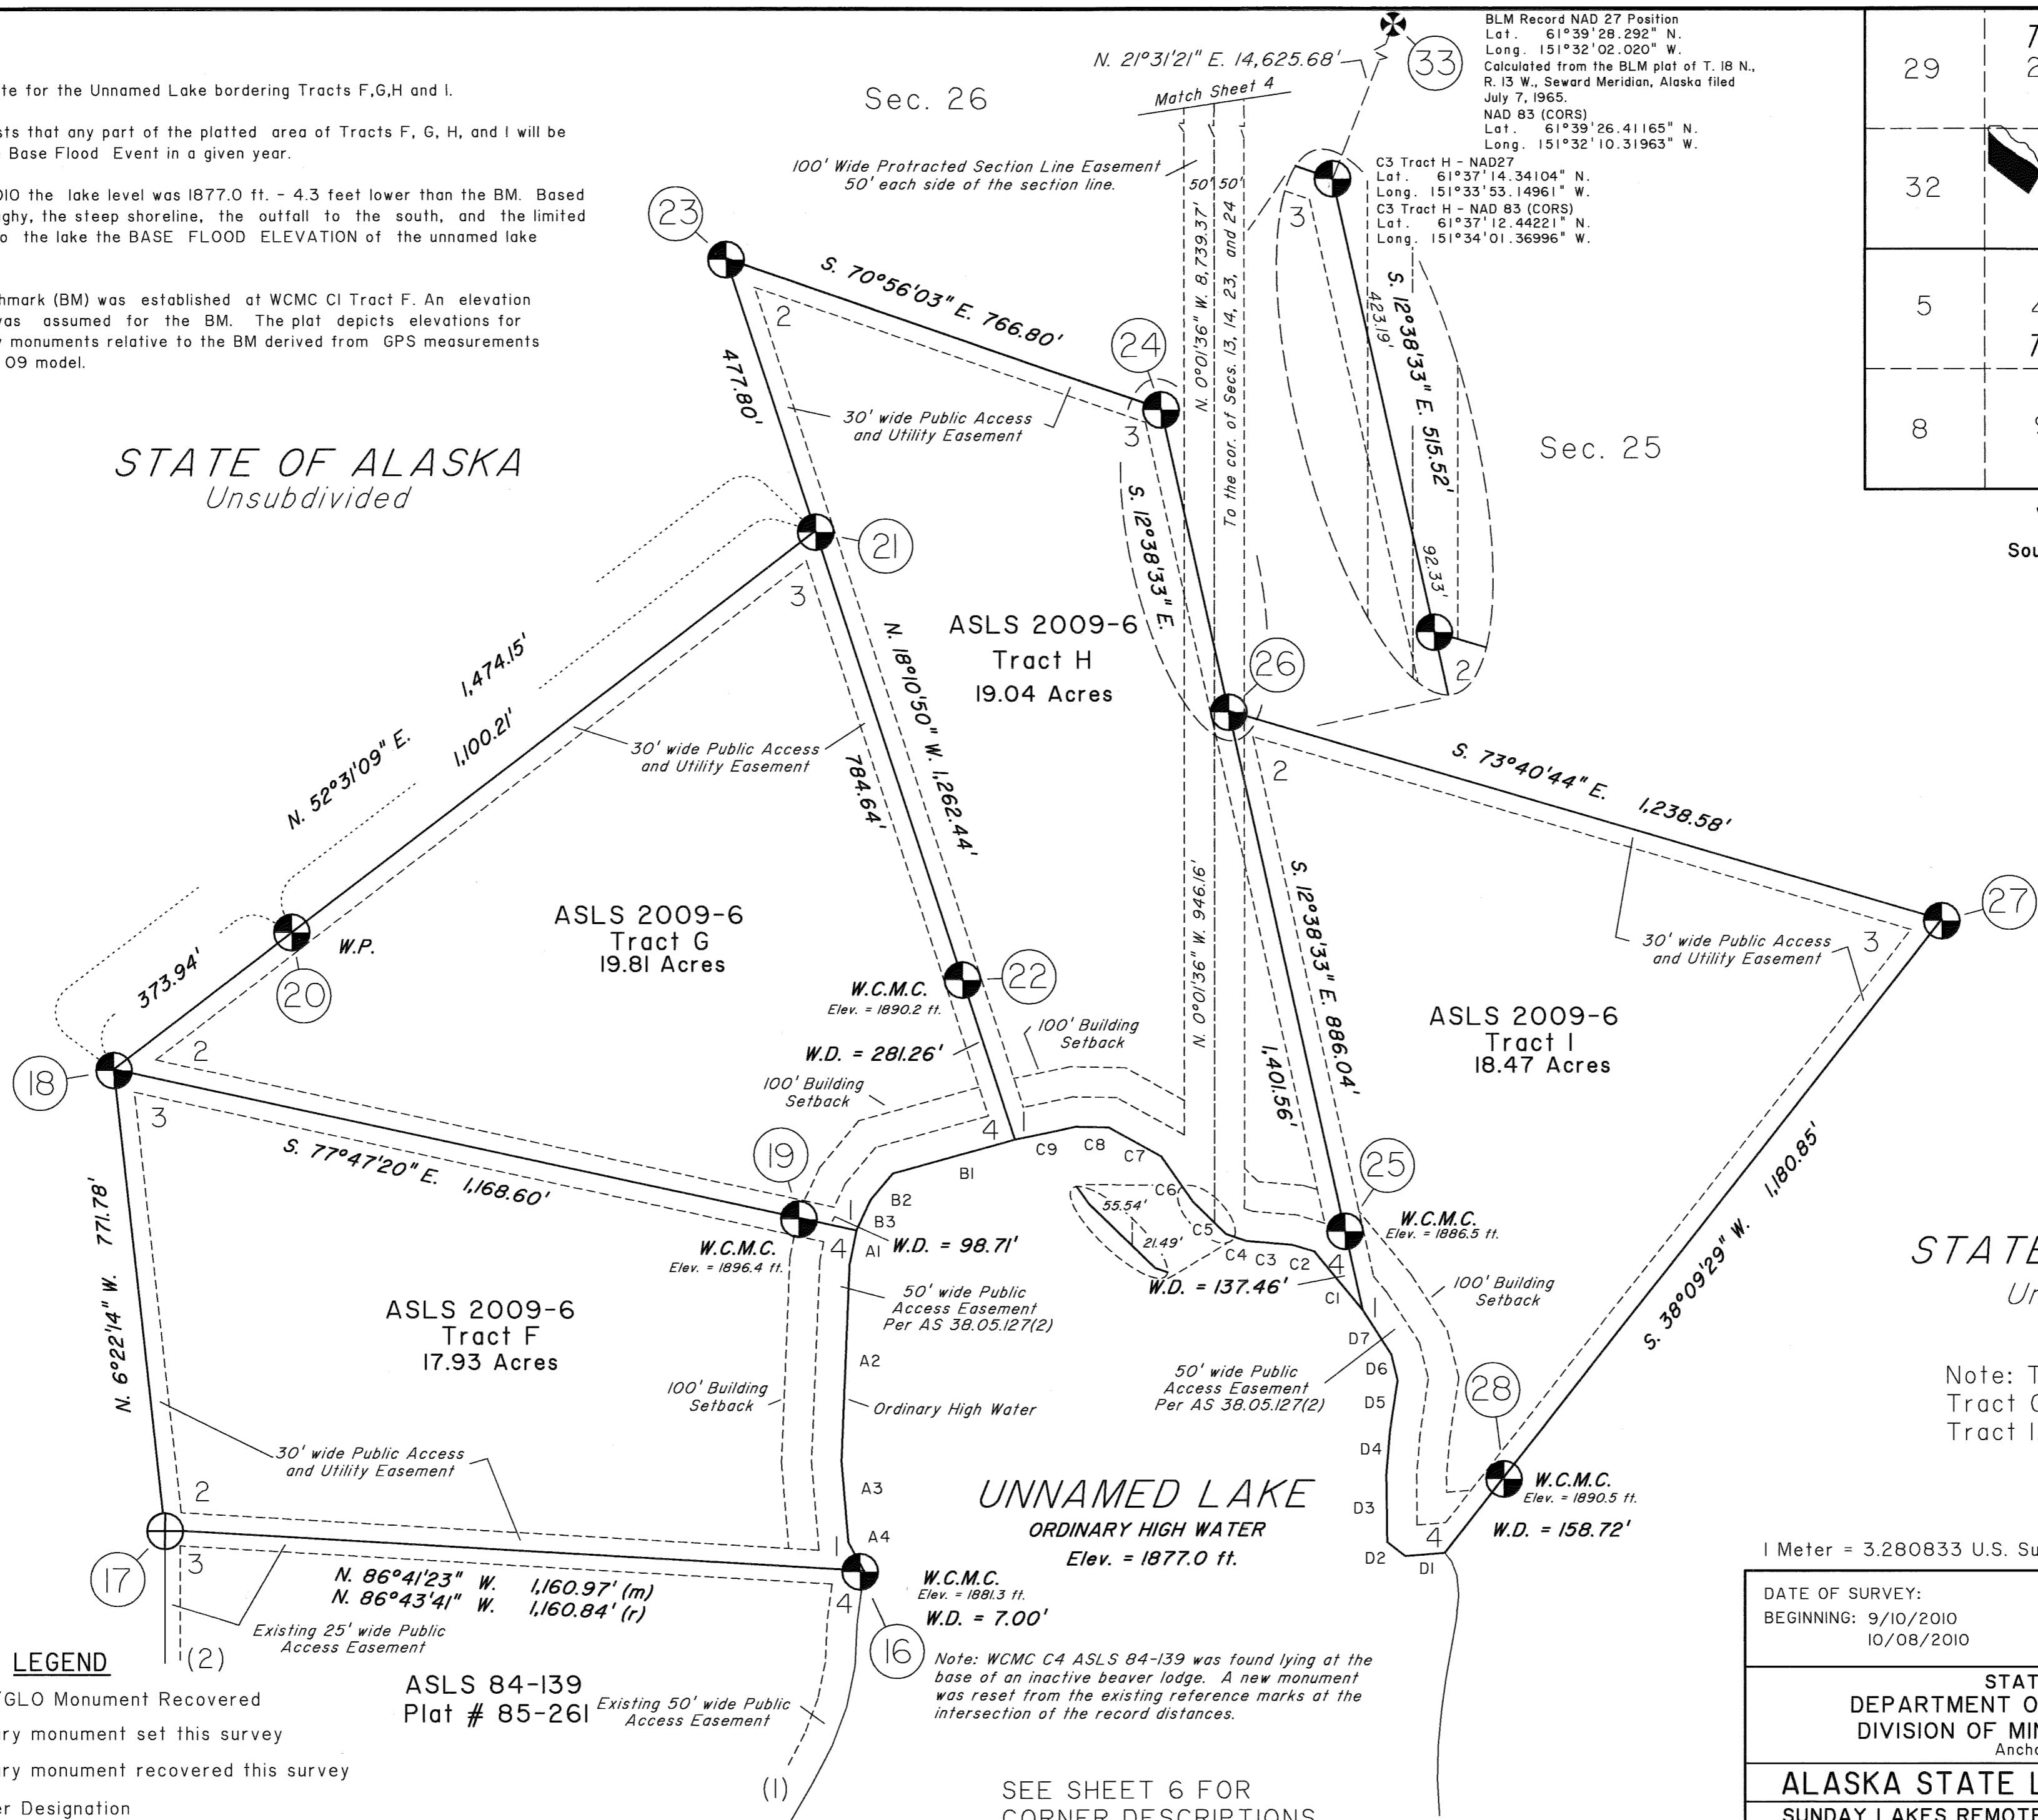

LEGEND


- ⊗ BLM/GLO Monument Recovered
- ⊕ Primary monument set this survey
- ⊕ Primary monument recovered this survey
- Ⓛ Corner Designation
- Surveyed Line
- - - Unsurveyed Line
- (m) Measured this survey
- (r) Record
- - - Protracted Section Line

ASLS 84-139
Plat # 85-261 Existing 50' wide Public Access Easement

Note: WCMC C4 ASLS 84-139 was found lying at the base of an inactive beaver lodge. A new monument was reset from the existing reference marks at the intersection of the record distances.

SEE SHEET 6 FOR
CORNER DESCRIPTIONS

SHEET 5 of 6



PLAT NO. 2011-96 ANCHORAGE RECORDING DISTRICT

BLM Record NAD 27 Position
Lat. 61°39'28.292" N.
Long. 151°32'02.020" W.
Calculated from the BLM plat of T. 18 N., R. 13 W., Seward Meridian, Alaska filed July 7, 1965.
NAD 83 (CORS)
Lat. 61°39'26.41165" N.
Long. 151°32'10.31963" W.

C3 Tract H - NAD27
Lat. 61°37'14.34104" N.
Long. 151°33'53.14961" W.
C3 Tract H - NAD 83 (CORS)
Lat. 61°37'12.44221" N.
Long. 151°34'01.36996" W.

29	T18N R13W	28	27	26	25
32		33	THIS SHEET	34	35
5		4	T17N R13W	3	2
8		9		10	11
			JUDD LAKE		12

VICINITY MAP
Source: USGS DLG TYONEK C5
Scale 1" = 2 mile

MEANDERS


A1	S. 11°23'46" W.	58.55'
A2	S. 2°18'20" W.	327.42'
A3	S. 4°50'24" E.	134.50'
A4	S. 28°50'00" E.	54.60'
B1	S. 74°12'27" W.	211.43'
B2	S. 39°58'13" W.	57.33'
B3	S. 24°49'29" W.	56.09'
C1	N. 39°22'51" W.	127.22'
C2	N. 73°16'46" W.	39.41'
C3	N. 85°19'31" W.	75.64'
C4	N. 71°9'15" W.	36.50'
C5	N. 45°45'14" W.	77.03'
C6	N. 34°44'58" W.	92.07'
C7	N. 60°57'6" W.	99.64'
C8	N. 88°52'40" W.	55.80'
C9	S. 78°17'30" W.	103.21'
D1	S. 85°10'50" W.	66.22'
D2	N. 52°15'41" W.	38.14'
D3	N. 0°39'13" W.	111.71'
D4	N. 4°42'30" E.	74.86'
D5	N. 8°33'4" E.	82.91'
D6	N. 13°47'12" W.	43.57'
D7	N. 32°44'14" W.	88.33'

STATE OF ALASKA
Unsubdivided

Note: There are no Lessees for:
Tract G, ADL 230665
Tract I, ADL 230666

1 Meter = 3.280833 U.S. Survey Feet | U.S. acre = 0.4047 hectare

DATE OF SURVEY: BEGINNING: 9/10/2010 10/08/2010	NAME OF SURVEYOR: The Crazy Mountains JV 2000 E. Dowling Road, #6 Anchorage, AK 99507
STATE OF ALASKA DEPARTMENT OF NATURAL RESOURCES DIVISION OF MINING LAND AND WATER Anchorage, Alaska	
ALASKA STATE LAND SURVEY NO. 2009-6 SUNDAY LAKES REMOTE RECREATIONAL CABIN SITES CREATING TRACTS A THROUGH J WITHIN UNSURVEYED SECTIONS 13, 25, 26, 33, 35 and 36, T. 18 N., R. 13 W., SEWARD MERIDIAN, ALASKA ANCHORAGE RECORDING DISTRICT Containing 164.16 Acres	
DRAWN BY: JEM DATE: 11/10/2010	APPROVAL RECOMMENDED <i>William S. Brun</i> For 11/10/10 STATEWIDE PLATTING SUPERVISOR DATE
SCALE: 1" = 200'	CHECKED BY: KJL File No. ASLS 20090006




16 Recovered an alum. post, 2 1/2 ins. diam. horizontal under 2 ft. of debris in a beaver lodge with cap marked ASLS 84-139 WCMC4 2196-S 1984.

Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap mkd. as shown. From which the existing reference marks

A steel rebar, 5/8 in. diam., projecting 4 ins. above the ground, with an alum. cap, 1 ins. diam., marked RM 1 WCMC4 31.72 ft., bears N. 86° 26' W., 31.72 ft. dist.

A steel rebar, 5/8 in. diam., projecting 4 ins. above the ground, with an alum. cap, 1 ins. diam., marked RM 2 WCMC4 25.00 ft., bears S. 3° 58' W., 25.00 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner. Bury the original alum. post upside down alongside the new monument.




17 Recoverd an alum. post, 2 1/2 ins. diam., firmly set, flush with the ground, with alum. cap mkd. as shown. From which existing reference marks

A steel rebar, 5/8 in. diam., driven flush with the ground, with an alum. cap, 1 ins. diam., marked RM 1 C3 25.00 ft., bears S. 86° 48' E., 25.00 ft. dist.

A steel rebar, 5/8 in. diam., driven flush with the ground, with an alum. cap, 1 ins. diam., marked RM 2 C3 25.00 ft., bears S. 0° 40' E., 24.85 ft. dist.

Place an orange Carsonite witness post 1 ft. North of the corner.




18 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A spruce, 5 ins. diam., bears N. 2° E., 72.9 ft. dist., marked X BT.

A spruce, 5 ins. diam., bears S. 43° W., 49.1 ft. dist., marked X BT.

A spruce, 6 ins. diam., bears N. 24 3/4° W., 46.4 ft. dist., marked X BT.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.




19 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A steel rebar, 5/8 in. diam., 36 ins. long, driven 30 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 9° W., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 30 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 84 1/2° W., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.




20 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, and in a collar of stone with alum. cap mkd. as shown. From which

A spruce, 9 ins. diam., bears N. 28° W., 82.9 ft. dist., marked X BT.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 16.4 ft., bears S. 27° W., 16.4 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 32.9 ft., bears N. 75° W., 32.9 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.




21 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 23° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 30 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears S. 61 1/2° W., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.




22 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A steel rebar, 5/8 in. diam., 36 ins. long, driven 33 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 80 1/2° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 33 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears S. 13° E., 25.0 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.




23 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 70° W., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 7° W., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.




24 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 29° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 32 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears S. 48° E., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.




25 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A steel rebar, 5/8 in. diam., 36 ins. long, driven 35 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 45° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 35 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears S. 45° E., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.




26 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A steel rebar, 5/8 in. diam., 36 ins. long, driven 33 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 80° W., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 33 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 5° E., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.




27 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears S. 18 1/2° W., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 34 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears S. 56 3/4° E., 25.0 ft. dist.

Place a pink DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.



28 Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap mkd. as shown. From which

A steel rebar, 5/8 in. diam., 36 ins. long, driven 35 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 1 25.0 ft., bears N. 45° E., 25.0 ft. dist.

A steel rebar, 5/8 in. diam., 36 ins. long, driven 35 ins. in the ground with an alum. cap, 2 ins. diam., marked RM 2 25.0 ft., bears N. 45° W., 25.0 ft. dist.

Place an orange DEEP-I magnet at the base of the alum. post and an orange Carsonite witness post 1 ft. North of the corner.

APPLICANT CERTIFICATE

I, THE UNDERSIGNED, HEREBY CERTIFY THAT I AM THE APPLICANT OF TRACT F ASLS 2009-6, ADL 230553 AS SHOWN HEREON. I HEREBY APPROVE THIS SURVEY AND PLAT.

DATE: 8/29/2011

Patricia L. Jones
PATRICIA L. JONES

P.O. BOX 521016
BIG LAKE, ALASKA 99652


NOTARY'S ACKNOWLEDGEMENT

SUBSCRIBED AND SWORN TO BEFORE ME THIS 29th DAY OF August, 2011

BY Patricia L. Jones
APPLICANT

Ronda Wilson
NOTARY FOR THE STATE OF ALASKA

MY COMMISSION EXPIRES with office



APPLICANT CERTIFICATE

I, THE UNDERSIGNED, HEREBY CERTIFY THAT I AM THE APPLICANT OF TRACT H ASLS 2009-6, ADL 230618 AS SHOWN HEREON. I HEREBY APPROVE THIS SURVEY AND PLAT.

DATE: 9/1/11

Michael G. McNamara

MICHAEL G. McNAMARA
3930 NORTHPOINT DRIVE
ANCHORAGE, ALASKA 99502


NOTARY'S ACKNOWLEDGEMENT

SUBSCRIBED AND SWORN TO BEFORE ME THIS 1 DAY OF SEPTEMBER, 2011

BY Michael McNamara
APPLICANT

Michael McNamara
NOTARY FOR THE STATE OF ALASKA

MY COMMISSION EXPIRES w/office



SHEET 6 of 6

1 Meter = 3.280833 U.S. Survey Feet | U.S. acre = 0.4047 hectare

DATE OF SURVEY: BEGINNING: 9/10/2010 10/08/2010	NAME OF SURVEYOR: The Crazy Mountains JV 2000 E. Dowling Road, #6 Anchorage, AK 99507
STATE OF ALASKA DEPARTMENT OF NATURAL RESOURCES DIVISION OF MINING LAND AND WATER Anchorage, Alaska	
ALASKA STATE LAND SURVEY NO. 2009-6 SUNDAY LAKES REMOTE RECREATIONAL CABIN SITES CREATING TRACTS A THROUGH J WITHIN UNSURVEYED SECTIONS 13, 25, 26, 33, 35 and 36, T. 18 N., R. 13 W., SEWARD MERIDIAN., ALASKA ANCHORAGE RECORDING DISTRICT Containing 164.16 Acres	
DRAWN BY: JEM DATE: 11/10/2010	APPROVAL RECOMMENDED <u>William S. Brown</u> for <u>11/16/11</u> STATEWIDE PLATTING SUPERVISOR DATE
SCALE: 1" = 200'	CHECKED BY: KJL File No. ASLS 20090006

2011-916
Plat #
ANCHORAGE
Rec Dist
Date 12-2 2011
Time 11:03 A M

OPUS solution : ac512440.10o 000072704 Inbox X

opus to me

[show details](#) 12:56 PM (8 minutes ago)

[Reply](#)

FILE: ac512440.10o 000072704

1008 NOTE: Antenna offsets supplied by the user were zero. Coordinates
1008 returned will be for the antenna reference point (ARP).

1008

NGS OPUS SOLUTION REPORT
=====

All computed coordinate accuracies are listed as peak-to-peak values.
For additional information: <http://www.ngs.noaa.gov/OPUS/about.html#accuracy>

USER: cmivjim@gmail.com DATE: September 02, 2010
RINEX FILE: ac512440.10o TIME: 20:56:10 UTC

SOFTWARE: page5 0909.08 master40.pl 081023 START: 2010/09/01 00:00:00
EPHEMERIS: igr15993.eph [rapid] STOP: 2010/09/01 23:59:00
NAV FILE: brdc2440.10n OBS USED: 68359 / 71412 : 96%
ANT NAME: TRM29659.00 SCIT # FIXED AMB: 305 / 314 : 97%
ARP HEIGHT: 0.0 OVERALL RMS: 0.011(m)

REF FRAME: NAD_83(CORS96)(EPOCH:2003.0000) ITRF00 (EPOCH:2010.6671)

X: -2690561.786(m) 0.035(m) -2690562.725(m) 0.035(m)
Y: -1440531.692(m) 0.009(m) -1440530.648(m) 0.009(m)
Z: 5582880.678(m) 0.039(m) 5582880.998(m) 0.039(m)

LAT: 61 29 53.10228 0.012(m) 61 29 53.09770 0.012(m)
E LON: 208 9 52.84015 0.008(m) 208 9 52.74799 0.008(m)
W LON: 151 50 7.15985 0.008(m) 151 50 7.25201 0.008(m)
EL HGT: 956.952(m) 0.051(m) 957.393(m) 0.051(m)
ORTHO HGT: 947.375(m) 0.051(m) [NAVD88 (Computed using GEOID09)]

UTM COORDINATES STATE PLANE COORDINATES
UTM (Zone 05) SPC (5004 AK 4)
Northing (Y) [meters] 6818822.078 836372.807
Easting (X) [meters] 562001.500 402272.930
Convergence [degrees] 1.02355246 -1.61300944
Point Scale 0.99964710 1.00001697
Combined Factor 0.99949741 0.99986723

US NATIONAL GRID DESIGNATOR: 5VNJ6200118822(NAD 83)

BASE STATIONS USED
PID DESIGNATION LATITUDE LONGITUDE DISTANCE(m)
DJ3029 KEN5 KENAI 5 CORS ARP N604030.284 W1512100.570 95381.7
AI0952 TSEA ANCHORAGE CORS ARP N611114.374 W1495341.819 109482.9
DL6456 ATW2 ATW2_AKDA_AK2000 CORS ARP N613551.915 W1490756.159 144159.0

NEAREST NGS PUBLISHED CONTROL POINT
UW6239 TRIUM N613014.029 W1514753.689 2072.9

This position and the above vector components were computed without any knowledge by the National Geodetic Survey regarding the equipment or field operating procedures used.