

Public Data File 87-10

Hydrologic and Water Quality Investigations Related to
the Occurrence of **Placer** Mining in Interior Alaska
Summer 1986

by

Stephen F. **Mack** and Mary **Moorman**

Alaska Division of
Geological and Geophysical Surveys

May 1987

THIS REPORT HAS NOT BEEN REVIEWED FOR
TECHNICAL CONTENT (EXCEPT AS NOTED IN
TEXT) OR FOR CONFORMITY TO THE
EDITORIAL STANDARDS OF DGGS

L

794 University Avenue, Basement
Fairbanks, Alaska 99709

SUMMARY

This report presents and discusses turbidity, total suspended solids (TSS), settleable solids, and stream discharge data collected and analyzed as part of the interagency placer mining research project during the 1986 field season. During 1986 12 sites in the Birch Creek drainage and one site on Faith Creek (in part by the Alaska Department of Fish and Game) were monitored throughout the summer. At six sites automatic samplers and continuous water level recorders enabled estimation of daily averages for turbidity, TSS, discharge and sediment load which is the product of TSS and discharge. During a seven day period in late July-early August, a short reach of Mammoth Creek was intensively monitored to examine the sediment contributions from individual mines and from channel resuspension. Outside the Birch Creek drainage and Faith Creek, results from a limited amount of samples collected at state waysides, villages participating in the Village Water Quality Monitoring program and from the Tolovana above mining are presented.

Season-long monitoring shows sediment and discharge levels at important locations in the Birch Creek drainage and at Faith Creek. Use of automated equipment enabled sampling and monitoring during infrequent storm events and allowed estimation of daily averages throughout the field season. Results indicate the turbidity and sediment loads have decreased since monitoring began in 1984, but mined streams still have much larger turbidity concentrations and sediment loads than unmined streams.

Use of paired TSS and turbidity data from 1986 indicate that equations developed from data collected in 1985 and earlier do not predict well. Multiple regressions using turbidity and discharge to predict TSS improve the coefficient of determination (r^2) and equation standard error of estimate over a simple regression using turbidity to predict TSS, but the improvement is not sufficient to abandon collection of TSS.

The Mammoth Creek Intensive Study illustrated the advantage of control of water use. Mining operations that discharged less water had less of an impact on the stream sediment load.

TABLE OF CONTENTS

SUMMARY	1
LIST OF FIGURES	3
LIST OF TABLES	3
ACKNOWLEDGEMENTS	3
INTRODUCTION	4
METHODS	9
A. Turbidity, total suspended solids, and settleable solids.....	9
B. Discharge	11
C. Sediment load and turbidity index load	12
D. Mammoth Creek Intensive Study	13
RESULTS AND DISCUSSION	14
A. Turbidity, TSS, and settleable solids in Birch Creek drainage streams	14
1. Turbidity	14
2. Settleable solids	16
3. Total suspended solids	16
B. Discharge	21
C. Sediment loads and turbidity index loads.....	23
D. Mammoth Creek Intensive Study	27
E. Alaska Department of Fish & Game data	33
F. Miscellaneous data	34
REFERENCES CITED	35
 APPENDICES	
1. Data from automatic samplers in Birch Creek drainage.....	7
2. Data from non-automated monitoring sites.....	8
3. Settleable solids data from all sources by site.....	2
4. Discharge data from automated sites.....	62
5. Data from Mammoth Creek Intensive Study, July 29 -August 3, 1987	67
6. Data collected by ADF&G	73
7. Miscellaneous data	81
8. Description of mining operations in Mammoth Creek Intensive Study	84
9. Specific locations of study sites	87

LIST OF FIGURES

1.	Location of sites for placer mining studies, 1986.....	6
2.	Location of sites for Mammoth Creek Intensive Study.....	8
3.	Turbidity - settleable solids relationship.....	1 3
4.	Velocity - settleable solids relationship.....	1 4
5.	Schematic diagram of Mammoth Creek Intensive Study results.....	2 5

LIST OF TABLES

1.	Summary of turbidity values collected in Birch Creek Basin.....	1 1
2.	Z score results.....	16
3.	Multiple regression results using 1986 data	1 7
4.	Summary of discharge values.....	18
5.	Sediment loads associated with placer mining	1 9
6.	Turbidity index loads for period of record.....	2 2
7.	Average discharge, turbidity, TSS, and sediment load, Mammoth Creek Intensive Study.....	24

ACKNOWLEDGEMENTS

The authors wish to acknowledge the assistance of Shirley **Liss** who helped with sample collection and analysis, discharge measurements, and other field and laboratory work.

Hydrologic and Water Quality Investigations Related to the Occurrence of Placer Mining in Interior Alaska Summer 1986

INTRODUCTION

This report presents and discusses data collected and analyzed by the Alaska Division of Geological and Geophysical Surveys (DGGs) and assisting agencies during the 1986 field season as part of the interagency Placer Mining Research Project. The work done in 1986 was a continuation of the water quality monitoring of placer-mined streams in 1984 and 1985, principally in small streams in the Birch Creek drainage. The 1984-5 work was reported in "Hydrologic and Water Quality Investigations Related to the Occurrence of Placer Mining in Interior Alaska, Summers **1984-5**" (Mack and Moorman). The 1985 report also gives a more complete description of the study area.

The goal of the 1986 season was to continue the monitoring done in the previous two years using automated sampling equipment and water level recorders as available. In general, in the Birch Creek drainage DGGs monitored the same sites in 1986 that were monitored in previous years. Exceptions to this are that Porcupine Creek at the road crossing and Bonanza Creek below mining were dropped and Birch Creek above Twelvemile Creek was added. Automatic samplers and continuous water level recorders were placed at Birch Creek at the Steese Highway Bridge, Crooked Creek above mouth, Mammoth Creek at Steese Highway, Birch Creek above Twelvemile Creek, and Boulder Creek

at the U.S. Geological Survey (USGS) gage (USGS water level recorder at this site). Two discharge sites at mining operations from 1984-5 were not continued because the miners had moved their operations. The location of the sampling sites in the Birch Creek drainage are shown in Figure 1.


Samples from the automated samplers were analyzed for turbidity and total suspended solids; those from non-automated sites for turbidity only. At each visit to both automated and non-automated sites samples were collected for settleable solids determination.

The large number of paired TSS-turbidity observations from the automatic samplers afforded a good opportunity to test equations for predicting TSS from turbidity developed from data collected in 1985 and earlier (**Mack** 1986). These data were also used to develop multiple regression equations using turbidity and discharge to predict TSS as suggested in **Mack** (1986).

A question from the 1984-5 monitoring was how much of the turbidity, TSS and settleable solids in mined streams was directly attributable mining effluent discharge and how much to resuspension of sediment on the channel bottom. To address this, more intensive monitoring of mined streams, including sampling above and below individual mining operations, was needed. With the assistance of the

Figure 1. LOCATION OF SITES FOR PLACER MINING STUDIES 1986


BIRCH CREEK AND UPPER CHATANIKA RIVER DRAINAGES

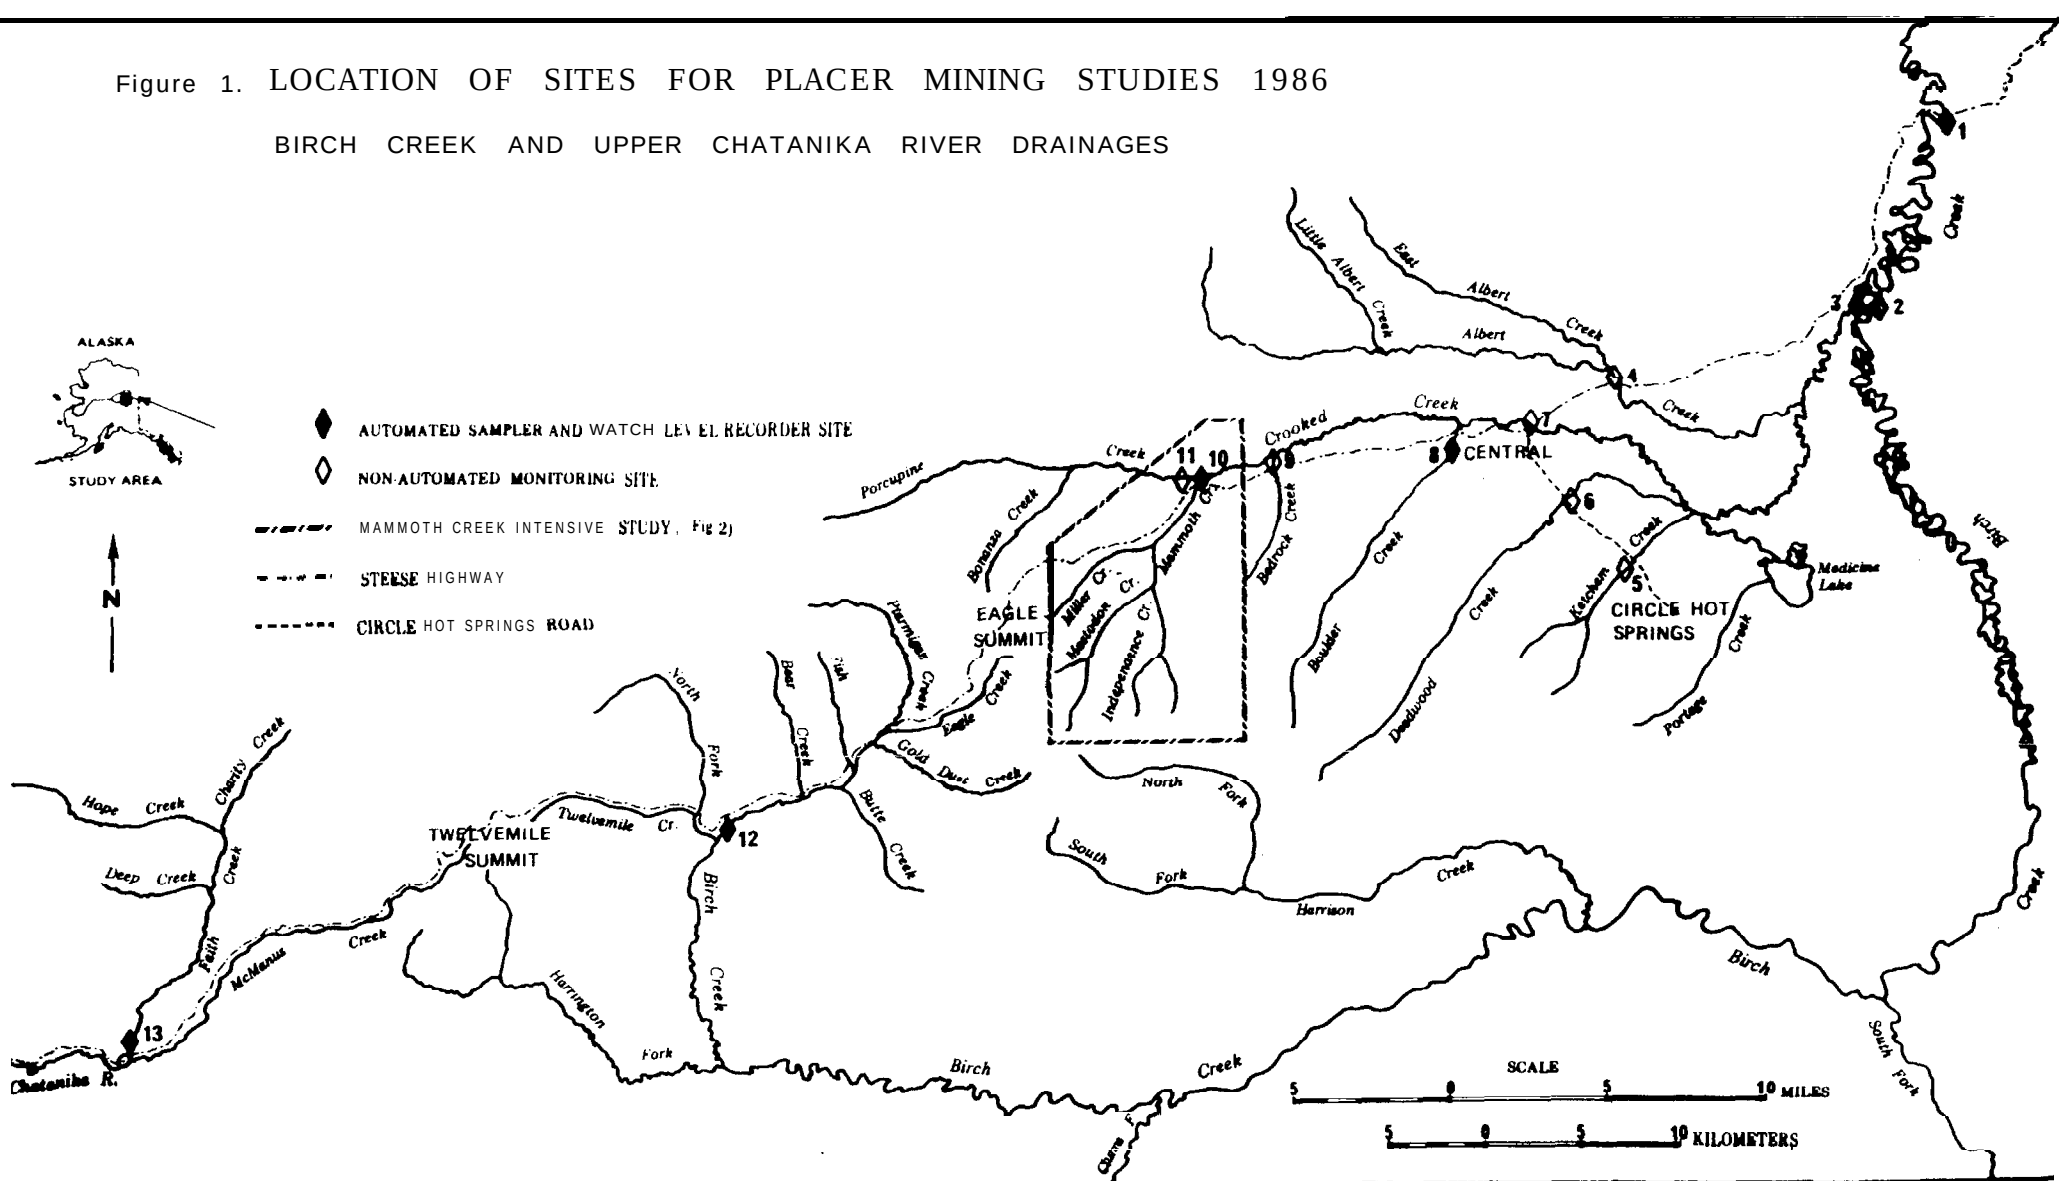

Alaska Division of Mining intensive sampling of a five mile reach of upper Mammoth Creek and its tributaries was done during a seven day period from July 29 through August 3. Within this report this effort is called the Mammoth Creek Intensive Study: study sites are identified in Figure 2.

Outside the Birch Creek and Faith Creek drainages more limited work was done in 1986 than in 1984-5. Results are reported from samples collected by the Alaska Division of Parks and Outdoor Recreation at sites in Alaska state parks and from rural villages under the Village Water Quality Monitoring program.

Figure 2. Location of sites for Mammoth Creek Intensive Study

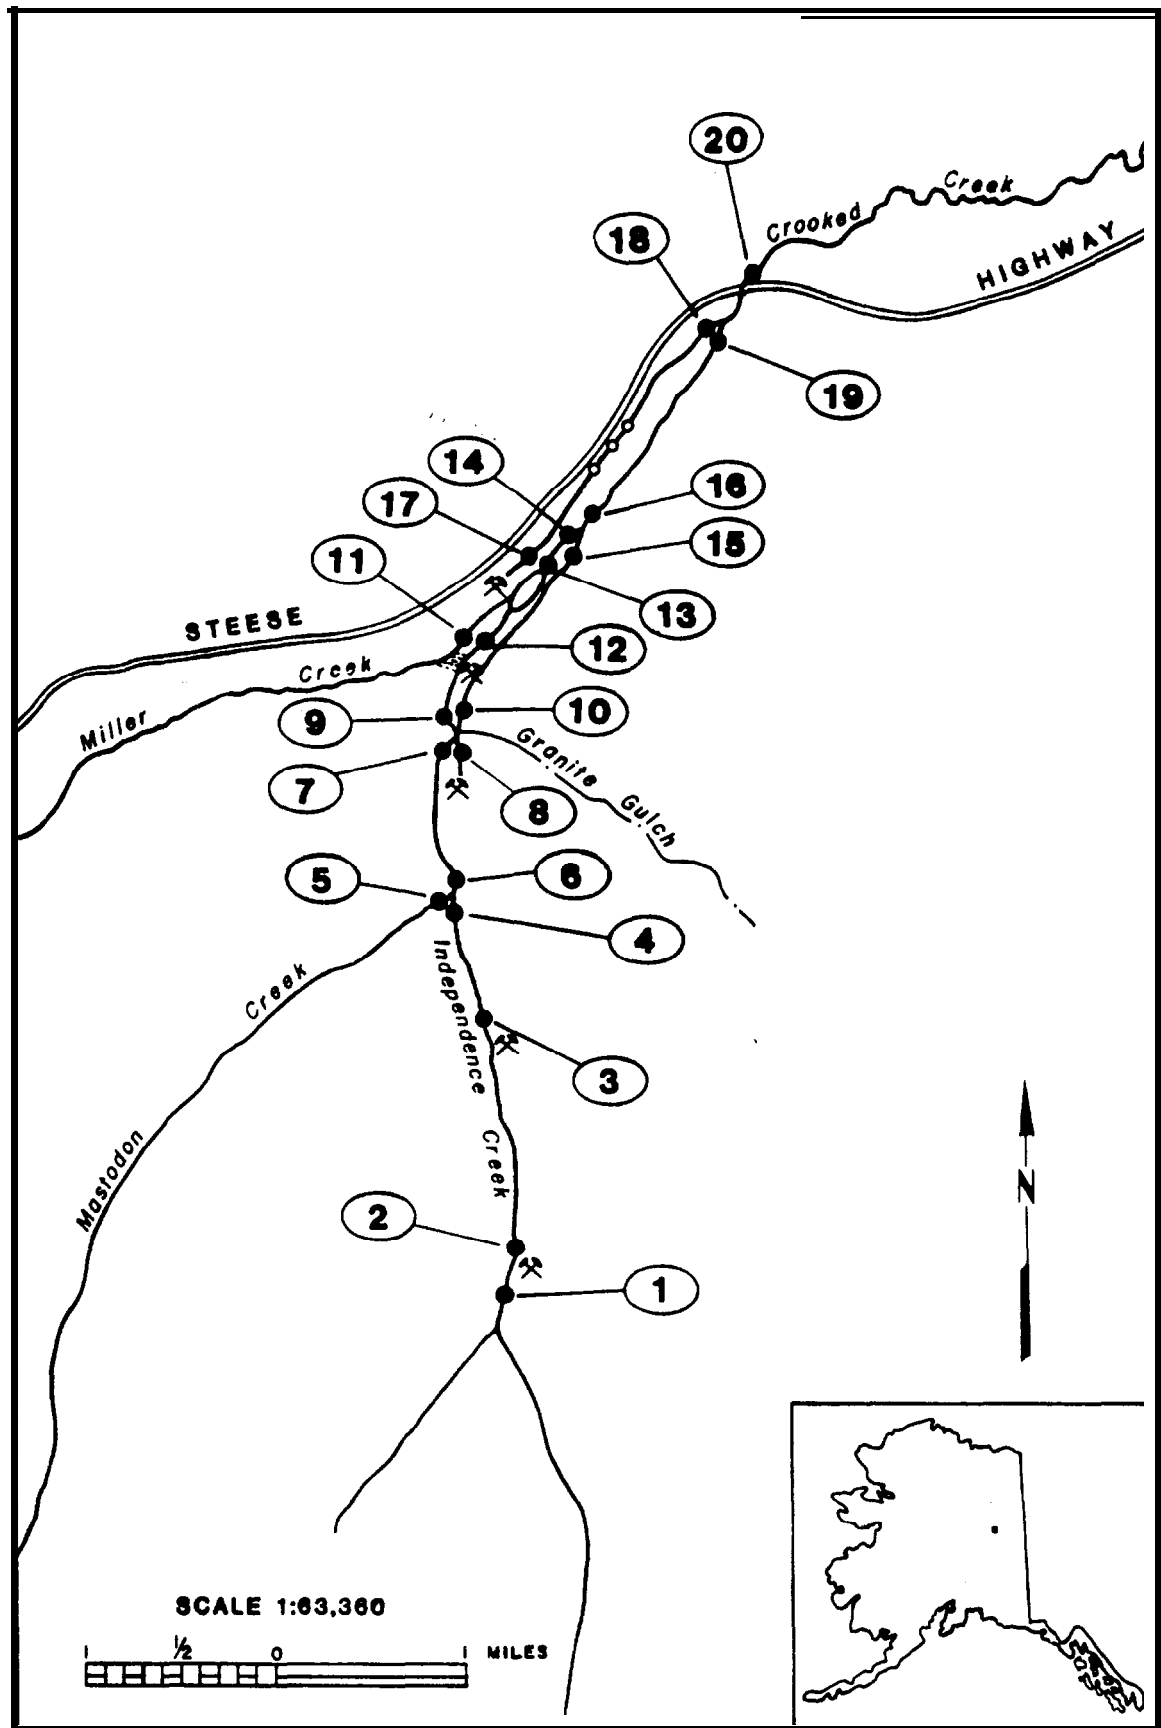

METHODS

A. Turbidity, total suspended solids, and settleable solids. These analyses were conducted in the field and in the DGGs hydrology lab located on the University of Alaska, Fairbanks campus in the Water Research Center. Sources of methods were the APHA-AWWA-WPCF "Standard Methods for the Examination of Water and **Wastewater**"; and procedures outlined in the user manuals of certain instrumentation (APHA 1985). The lab is a participant in EPA analytical quality assurance studies,

Samples for these analyses were collected from automated samplers or by grab methods in well-mixed reaches at sampling sites. When automated samplers were employed, the intake hose for the sampler was installed at a well-mixed location in the stream at mid depth with the hose nozzle pointing upstream. At Birch Creek above Twelvemile Creek, Birch Creek at the Steese Highway Bridge, Crooked Creek above its confluence with Birch Creek, and Mammoth Creek at the Steese Highway, the automated samplers were programmed to composite into one bottle four samples taken six hours apart each day. At Faith Creek the automated sampler was programmed to take discrete samples every six hours. Samples from the Village Water Quality Monitoring project were collected by village residents and mailed to the DGGs lab in Styrofoam mailers.

Most turbidity determinations **were** done in the lab because the lab

served as a receiving point for samples coming in from more than one collecting agency, and because some of the more turbid samples required several serial dilutions to bring their turbidity down to readable levels. During 1986 instruments used were a Turner Designs Model 40 laboratory turbidimeter and a **Hach** model 16800 portable turbidimeter.

Total suspended solids samples were filtered through prewashed, dried and weighed glass fiber filters, according to EPA specifications. The size of the aliquot was dependent upon the amount of material suspended, but ranged from 25 ml to several liters.

Settleable solids were measured in the field using Imhoff cones following standard procedures (APHA 1985). Imhoff cones with a limit of detection of 0.1 ml/l were used.

Statistical techniques used in the development of linear regression models for predicting TSS from turbidity and multiple regression models for predicting TSS from turbidity and discharge were performed on the University of Alaska-Fairbanks VAX computer using the **GLM** (general linear model) procedure of the SAS statistical package (SAS 1985a; SAS 1985b). Turbidity, TSS and discharge were transformed into base 10 logarithms with all analyses done on transformed data. The procedures used are explained more detail in **Mack** (1986) and standard statistical texts (for example, Neter, Wasserman, and Kutner 1985).

To measure the predictive value of the models reported in **Mack** (1986) and models developed from 1986 data), data collected in 1986 were used with appropriate equations from **Mack** (1986) and observations from **Mack** (1986) were used with equations developed from 1986 data. Z scores were developed by subtracting the predicted TSS from the reported TSS and dividing by **the equation** standard error of estimate (as reported in **Mack** 1986). The Z score gives a relative measure of how close, in multiples of the standard error of estimate, the predicted value is to the reported value.

B. Discharge. Velocities used to calculate discharge in most cases were measured with a Marsh **McBirney** Model 201 Flowmeter. At Birch Creek at the Steese Highway Bridge velocities were measured from the bridge using a Price AA meter suspended from a hand line. Where depth was greater than 2.5 feet, velocities were measured at two and eight tenths of the depth from the surface. At depths less than 2.5 feet, velocities were measured six tenths of the depth from the surface. Discharges were calculated using the standard midpoint method (USDOI 1981) from at least twenty velocity measurements taken across the stream cross section where width permitted (most cases).

Staff gage locations were chosen on the basis of easy access, i.e., close to the Steese Highway, Circle Hot Springs Road, or other road access. Sites also used for turbidity monitoring were situated sufficiently downstream of any mining or tributary so that the stream

was well mixed at the sampling site. At each location the specific site was chosen by looking for a cross section that would provide the most change in stage for change in stream discharge and the least turbulence around the staff gage. Staff gage water surface levels were recorded whenever agency personnel were in the vicinity.

At Birch creek above Twelvemile Creek, Birch Creek at the Steese Highway Bridge, Crooked Creek above its confluence with Birch Creek, Mammoth **Creek** at the Steese Highway, and Faith Creek at the Steese Highway, continuous water surface levels were recorded with Omnidata DP320 Stream Stage Recorders. The DP320 is a small, battery operated device with a submersible pressure transducer which measures and records water levels between 0 to ten feet (to the nearest hundredth of a foot). Water level data are stored in a solid state memory called a data storage module. At all sites the water level recorders monitored water levels at 30 minute intervals.

Rating curves were developed for each site by taking at least four discharge measurements each field season at different water levels throughout the season. The rating curves were then used to estimate discharge from the observed or recorded staff gage water levels.

c. Sediment load and turbidity index load. Sediment load is calculated by multiplying discharge (in cfs) by TSS (in **mg/L**) and a constant, 0.0027, to put the units into tons per day. Turbidity index

load is obtained in the same manner - multiplying discharge in cfs by turbidity in **NTU**. In this report the product is divided by 1000 to bring the results in the same order of magnitude as sediment load. The units for turbidity index load (TIL) are KNTU-cfs where 'K' represents 1000.

D. Mammoth Creek Intensive Study. The Mammoth Creek area was chosen to study various aspects of the impact of mining activity to a relatively compact stream reach with a number of miners, and with good road access. Sampling sites were chosen above and below all mine sites and at all important surface water inflow points. Travel times between sampling points were estimated from distances estimated from maps and average measured stream velocities. A sampling schedule, based on these travel times, was established to attempt to monitor a slug of water as it passed through the system. At each site four samples collected each day, one every four hours. At three sites automated samplers were used to collect backup samples and to collect samples through the night.

Discharge was monitored by observing staff gages set at each site. Two or three discharge measurements were taken at each site. Because observed water levels and measured discharges at each site varied little, the discharges reported in the results section are averages of the measured discharges.

RESULTS AND DISCUSSION

A. Turbidity, TSS, and settleable solids in Birch Creek drainage streams.

1. Turbidity. The results from the season-long monitoring of sites in the Birch Creek drainage are presented in Appendix 1 (automated sites) and Appendix 2 (non-automated sites). Table 1 shows the monthly average turbidity at all sites monitored this year compared to averages from previous years. Two cautions should be remembered when viewing this table. First, all non-automated site values are averages of a limited number of discrete samples. Secondly, at the 1986 automated sites, 1985 values are from averages of discrete samples, while the 1986 results are averages of composited samples and include daily variation as well as a sampling of a wider range of flows. At sites far downstream from mining, such as Birch Creek at the Steese Highway Bridge, or on unmined streams, daily variation may not be important, however, at sites close to mining it could be.

In general, average turbidity at monitoring sites on mined streams was less in 1986 than in previous years. At the monitored unmined streams average turbidity was much higher in 1986, reflecting the higher flows observed. At Birch Creek at the Steese Highway Bridge, the furthest-most downstream sampling site in the Birch Creek drainage,

Table 1. Summary of Turbidity Values Collected in Birch Creek Basin

Location	Year	June (NTU)	July (NTU)	Aug (NTU)	Sep (NTU)	Avg Chng from previous year (%)
----------	------	---------------	---------------	--------------	--------------	---------------------------------------

Data from grab samples

Albert at Steese	86	20.9	22.5	0.60	2.3	
Bedrock at Steese	84			1.4	0.5	
	85	1.10	0.30	0.90	0.4	-31.6
	86	1.65	2.96	0.77	1.2	143.5
Crooked at Cntrl	84			880	696	
	85	236	658	390	181	-63.8
	86	113	151	70.4	297	-56.9
Deadwood at CHSR	84			1400	640	
	85	999	676	495	253	-63.3
	86	39.3	53.8	37.9	141	-88.8
Ketchem at CHSR	84			3210	152	
	85	160	1070	989	1190	-35.2
	86	115	122	140	786	-65.9
Porcupine ab Mth	85		95	410	370	
	86	59.4	123	40.7	515	-22.4

Data from automatic samplers

Birch ab 12Mile	86	255	201	237	251	
Birch at Bridge	85	47	23	35	18	
	86	79	110	6.3	19.1	74.3
Crooked ab Mth	85	105	88	172	59	
	86	118	65	36.3	84.4	-28.4
Boulder nr Steese	85		0.8	0.8	0.6	
	86	3.93	4.02	1.75	1.4	225.9
Mammoth at Steese	84			585	986	
	85	285	340	401	370	-50.9
	86	240	195	265	518	-12.8

average turbidity was higher in 1986. This result should be interpreted keeping in mind that the 1986 data are from an automatic sampler which collected samples during flood events as well as normal flows. The 1985 data are from discrete grab samples and during 1985 high flow events were missed. The Birch Creek at the Steese Highway sampling site is far enough downstream from active mining that discharge has a relatively larger effect on turbidity levels than it has at the more upstream sites.

2. Settleable solids. The settleable solids data collected in 1986 are presented in Appendix 3. Approximately twenty percent of the settleable solids samples collected in streams affected by mining were 0.2 ml/L or greater. High settleable solids appear to be more a result of high flows rather than from effluent discharges from individual mining operations. Figure 3 shows the relationship of settleable solids levels to average and median turbidity values. No strong pattern exists between turbidity and settleable solids at our sampling sites. Figure 4 shows settleable solids compared with velocity. Higher average and median velocities are associated with higher settleable solids levels. Settleable solids are the larger particles that will settle out in an Imhoff cone in one hour. With the higher stream velocities associated with high flow events more of those sized particles will be suspended in the water column. The good relationship with velocity and poor one with turbidity demonstrate that at our sampling sites high settleable solids are more attributable to non-point sources of sediment than to discharges from individual mining operations.

3. Total suspended solids. Samples from the automated samplers at Birch Creek above Twelvemile Creek, Birch Creek at the Steese Highway Bridge, Crooked Creek above mouth, Mammoth Creek at the Steese Highway, and Boulder Creek above the USGS gage, were analyzed for total suspended solids (TSS). These results are presented in Appendix 1.

Figure 3. Turbidity - settleable solids relationship


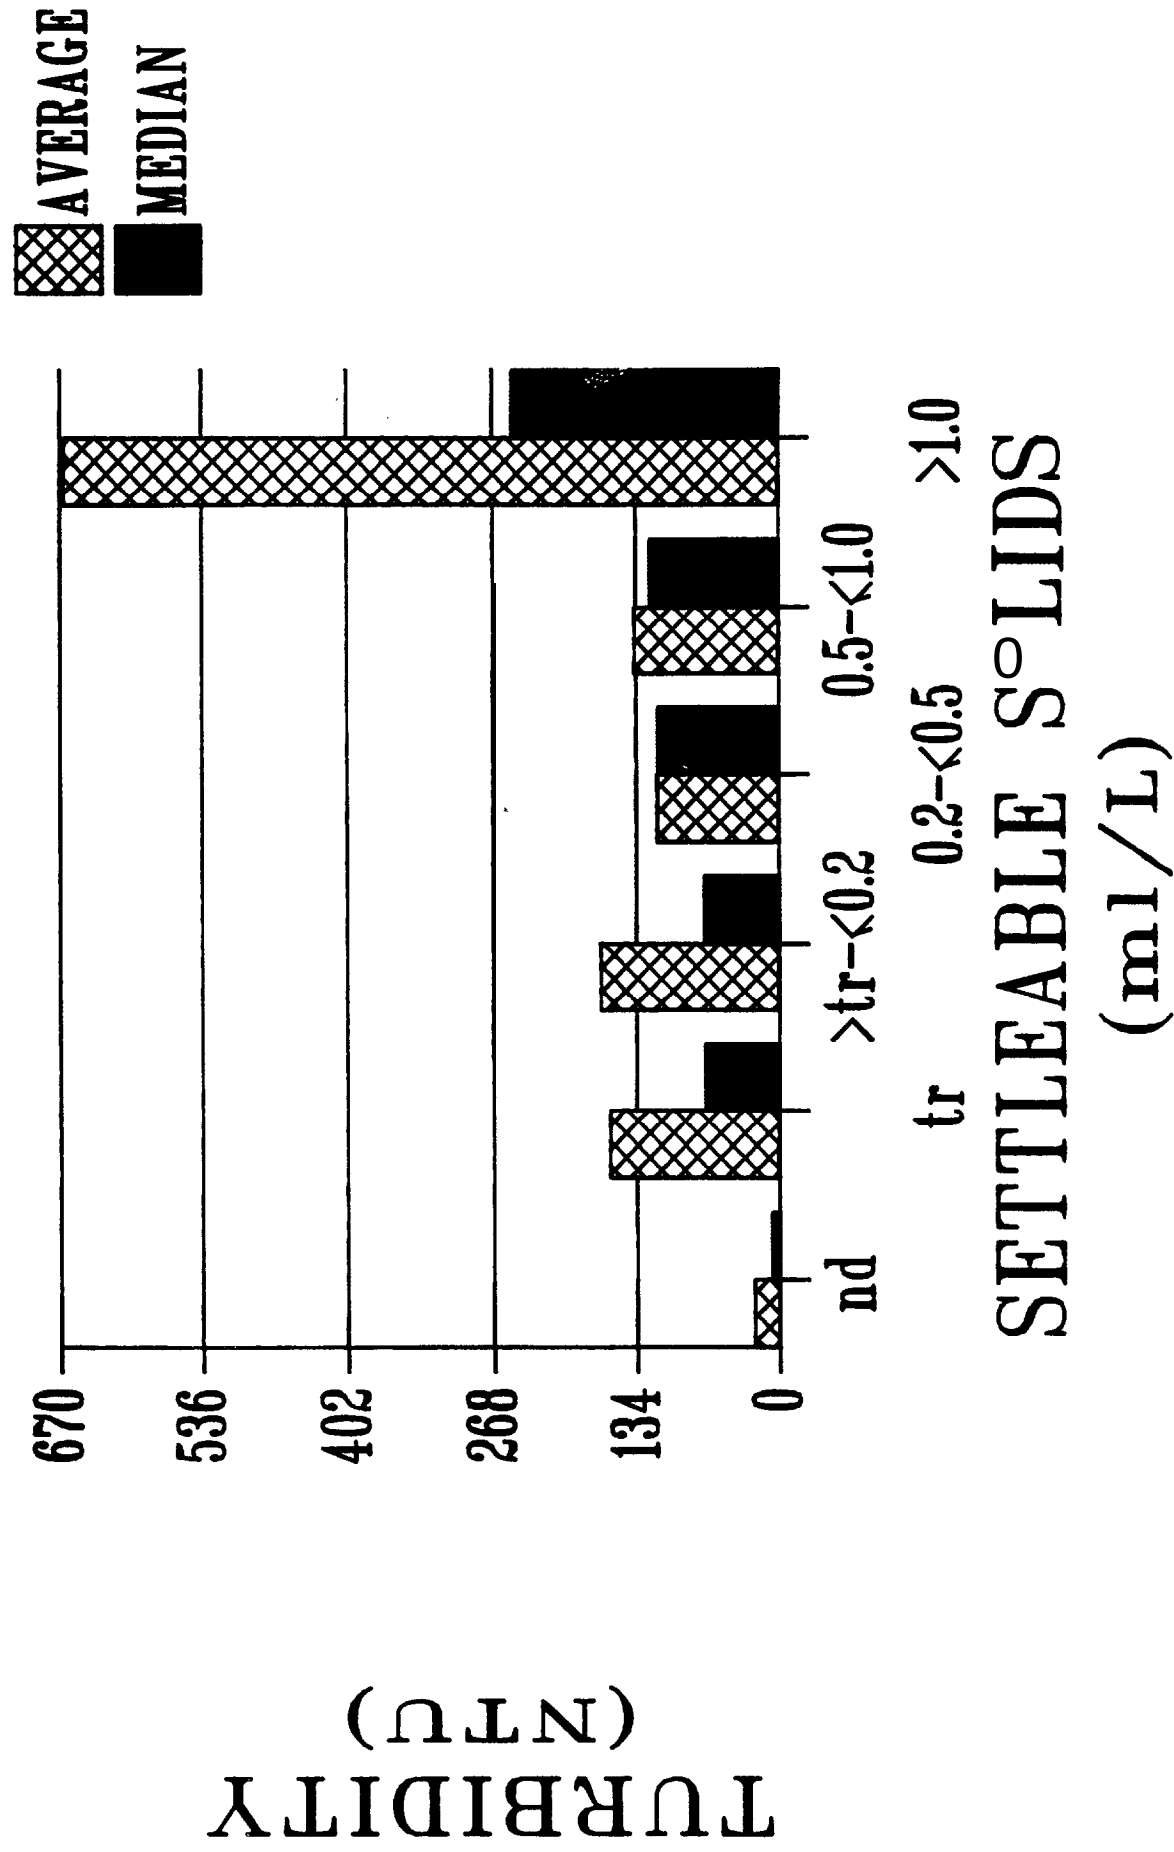


Figure 4. Velocity - settleable solids relationship

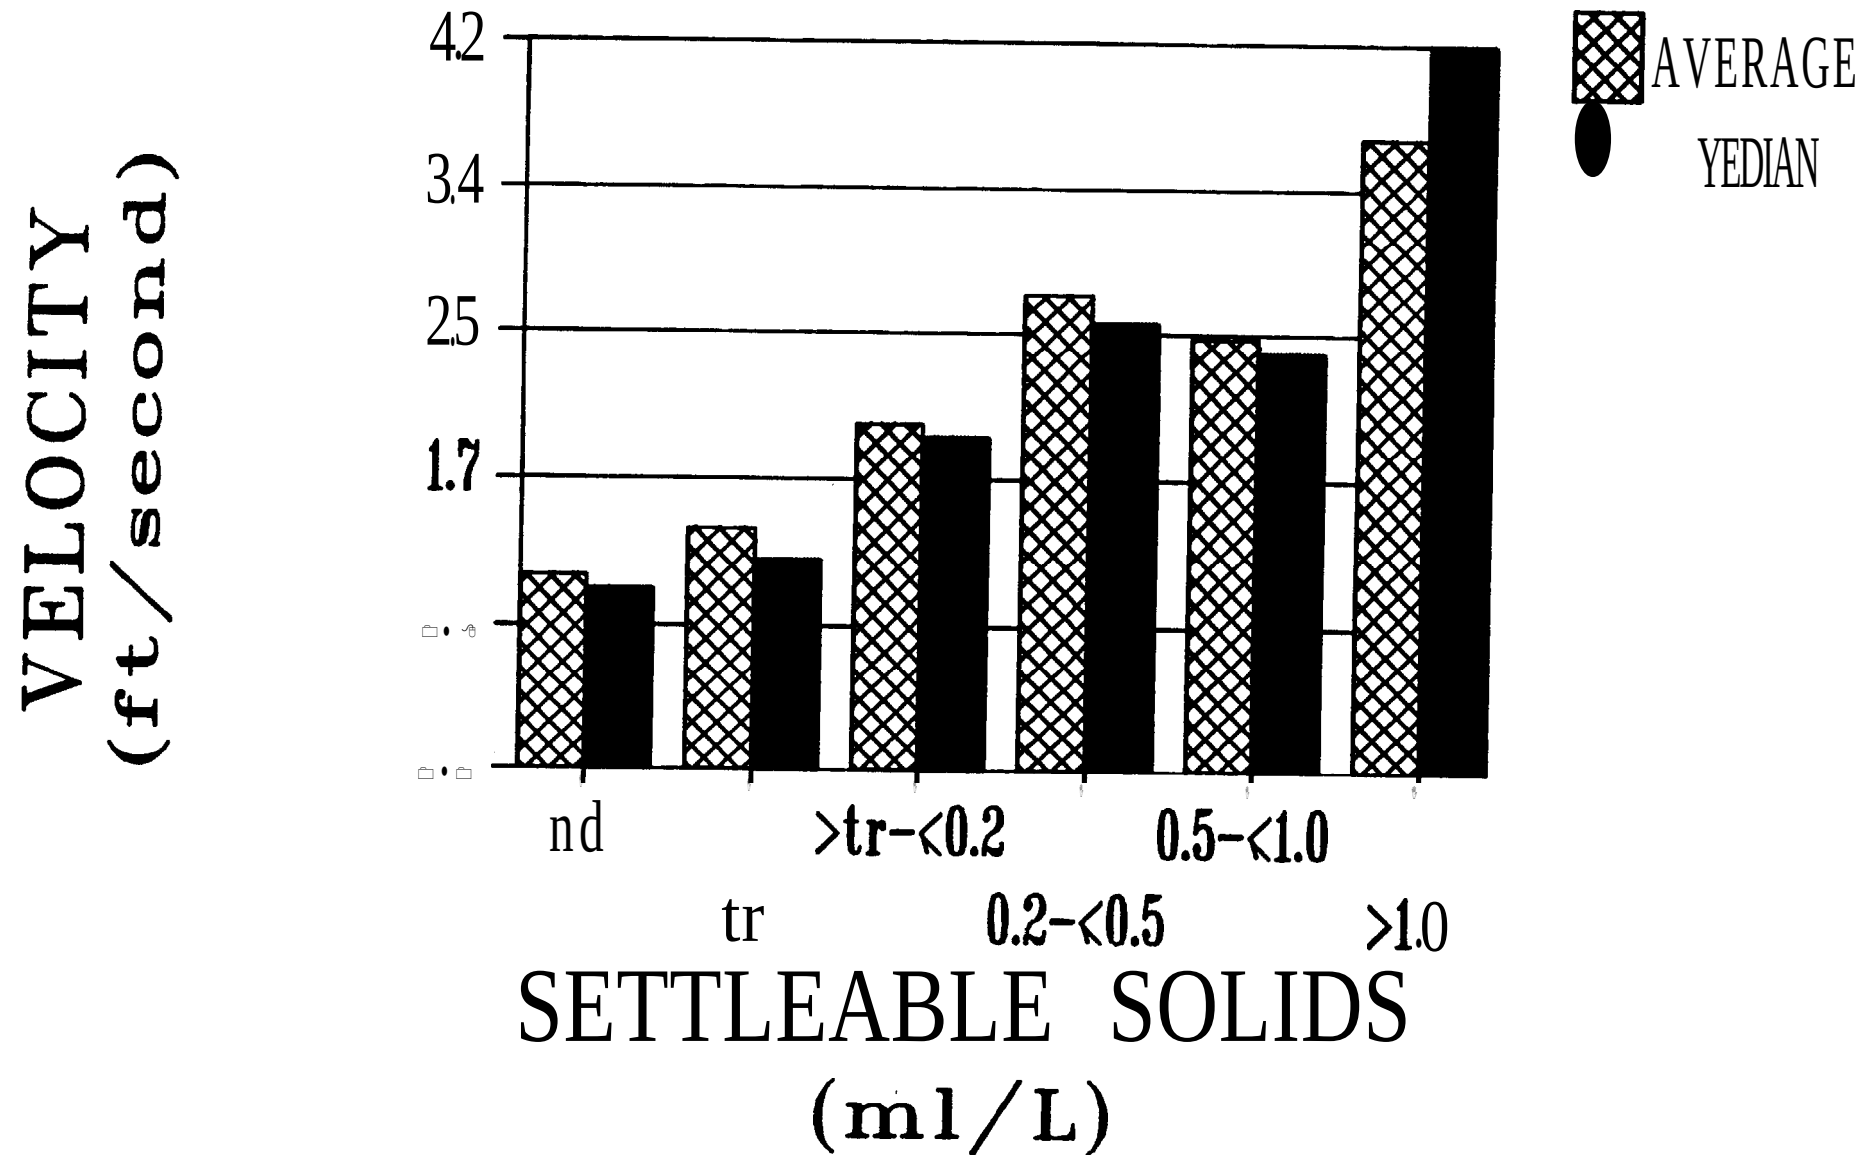

TSS and turbidity measure different **aspects** of the same physical characteristic, suspended material in water. Turbidity, as measured by nephelometric techniques, describes the reflective characteristics of particles and TSS describes the physical mass of the particles. Turbidity is an enforcement standard and is important because high levels have been associated with fish mortality and can be esthetically displeasing. TSS has also been associated with damage to fish and the measurement is useful for management because combined with discharge it can be translated into physical sediment loads. Measuring TSS is a more complicated, time consuming, and expensive procedure than measuring turbidity. If the easier-to-collect turbidity could be used to predict TSS, much effort and expense could be saved with little reduction in useful data.

During the 1985-86 winter all TSS and turbidity data reported to date by researchers working with placer mining topics in Alaska were collected to see if one regression equation could be used to predict TSS from turbidity in streams affected by mining ('Using turbidity to predict total suspended solids in mined streams in interior Alaska', **Mack** 1986). That investigation determined that the regression equations from different basins, streams and from different sites on a single stream were often statistically different, therefore all data should not be combined to develop one equation. The paired turbidity-TSS data collected in 1986 in the Birch Creek drainage were used to test the equations from 'Using turbidity to predict **TSS**'

which were developed from data collected in 1985 and earlier at the same sample sites. Using the turbidity data from Appendix 1, TSS values were predicted using the appropriate equation from the 1985 report and then compared to the reported TSS values. Table 2 presents the mean **z** score and **z** score standard deviation at each site. Ideally the means should be near zero and the standard deviation should be less than one. Only at Birch Creek above Twelvemile is the mean close to zero and nowhere is the standard deviation below one, demonstrating that the equations developed with data collected in 1985 and earlier do not estimate well with 1986 data.

Table 2. **z** Score Results

Z scores = (reported TSS - predicted TSS)/standard error of estimate		
Mean Std Deviation		
1985 simple regression equations used on 1986 data		
Equations using turbidity to predict TSS.		
Birch ab 12Mile	-0.12	3.42
Birch at Bridge	1.69	1.25
Crooked ab mouth	1.56	1.92
Mammoth at Steese	3.37	5.32
1986 multiple regression equations used on 1985 data		
Equations using turbidity and discharge to predict TSS.		
Birch at Bridge	-2.16	0.68
Crooked ab mouth	-1.90	1.21
Mammoth at Steese	-0.68	0.36

In 'Using turbidity to predict **TSS**' it was suggested that a multiple regression equation using turbidity and a flow component - either velocity or discharge - to predict TSS would be an improvement over the simple turbidity-TSS regression. To test this, multiple regression equations using turbidity and discharge to predict TSS were

developed from the data collected in 1986. The resulting equations were compared to simple regression equations developed from the same data and tested on 1985 data using Z scores as described above. The equations are presented in Table 3 and the Z score results are presented in Table 2.

The results suggest that multiple regression equations using turbidity and discharge to predict TSS are not reliable enough to abandon collection of TSS data. The multiple regression equations improve the coefficient of determination and standard error of estimate in two of three instances, but when tested against other groups of data (as in Table 2) may not accurately or precisely predict TSS.

Table 3. Multiple regression results using 1986 data. Equations in the form $Y = a * X_1^b * X_2^c$ where $Y = \text{TSS}$, $X_1 = \text{turbidity}$, $X_2 = \text{discharge}$, a is a constant, and b and c are exponents. N is the number of observations.

Location	N	a	b	c	r ²	SEE
Birch ab 12 Mile	111	2.51	0.833		0.386	0.237
	111	0.212	0.812	0.565	0.630	0.184
Birch at Bridge	17	1.79	1.351		0.787	0.286
	17	0.009		1.26	0.630	0.377
Crooked ab mouth	17	0.82	1.22	0.155	0.789	0.294
	44	2.54	1.03		0.577	0.270
Mammoth at Steese	44	0.29	0.710	0.570	0.703	0.229
	118	2.08	0.790		0.356	0.309
	118	0.23	0.927	0.656	0.564	0.255

B. Discharge. Discharge estimates at the sampling sites are presented along with the water quality data in Appendices 1 and 2, and in tabular form for the automated sites in Appendix 4. Table 4 summarizes the monthly averages of the past three years. In general

1986 was a drier year than 1985. At Boulder Creek, a site gaged by the U.S. Geological Survey, discharge averaged 47 percent less in 1986 than 1985. The 19 year average at Boulder Creek is 15 percent higher than the 1986 average. The automated sites show less of a difference:

Table 4. Summary of Discharge Values
Monthly averages of daily discharge in cfs

Location	Year	June (cfs)	July (cfs)	Aug (cfs)	Sep (cfs)	Avg Chng from previous year (%)
Averages of discrete observations						
Albert at Steese	86	170	52.6	3.6	32.1	
Bedrock at Steese	84			1.5	3.1	
	85	22.6	2.4	8.1	13.2	363
	86	9.9	22.7	1.5	4.5	-16.6
Crooked at Cntrl	84			40.0	52.7	
	85	246	65.9	88.8	162	171
	86	251	147	37.2	65.1	-11.1
Deadwood at CHSR	84			8.6	11.7	
	85	53.7	16.3	18.1	33.0	152
	86	35.2	17.4	5.1	6.7	-46.8
Ketchem at CHSR	84			2.7	4.5	
	85	19.4	6.0	9.8	18.1	288
	86	15.9	5.2	1.6	2.6	-52.5
Porcupine ab Mth	85	140	17.5	40.1	64.7	
	86	61.7	22.6	11.7	22.4	-53.6
Averages of continuous observations except where noted ^u						
Birch ab 12Mile	86	207	125	71.2	76.5	
Birch at Bridge	85	4600 ¹	1710 ¹	1930 ¹	3790 ¹	
	86	3730	2370	700	828	-3.3
Crooked ab Mth	85	703	505	267	524	
	86	809	436	71.7 ¹	115 ¹	3.1
Boulder nr Steese	84	76.4	23.9	5.5	3.6	
	85	70.2	36.5	11.0	25.1	30.5
	86	33.3	24.8	7.9	9.3	-47.3
	19 yr avg	42.6	17.5	15.3	11.4	15.3
Mammoth at Steese	84			20.2 ¹	19.8 ¹	
	85	93.6 ¹	23.3 ¹	25.4	46.4	79.5
	86	82.1	42.7	21.9	27.2	-7.8
Faith at Steese	86	107	80.4	294	149	

however, at Mammoth Creek the 1985 record was not continuous in June and early July, missing two large flow events. At Birch Creek at the

Bridge and Crooked Creek above the mouth, the recorders were not working in August and September in 1986. Data from those months are not included in percent change shown in Table 4.

C. Sediment loads and turbidity index loads. The sediment load shows the total amount of sediment carried by the stream. Table 5 shows the monthly averages at the sites where samples for TSS were

Table 5. Sediment loads associated with placer mining
monthly average in tons per day

Location	June	July	Aug	Sep
Birch ab 12Mile	420	79.2	40.2	48.3
Birch at Bridge	7270	1450	1	567²
Crooked ab Mth	1600	268	47.9²	101²
Boulder nr Steese	2.65	1.89	0.30	0.14
Mammoth at Steese	171	27.3	36.2	65.8
Faith at Steese	57.2	31.3	548	57.9

¹equipment not working.

²averages of discrete samples and observations.

taken in 1986. Birch Creek at the Steese Highway Bridge is the furthest downstream site and is below all mining. It has the largest monthly sediment load averages. In the Birch Creek basin most mining takes place above either Crooked Creek above mouth and Birch Creek **above 12Mile** Creek. The combined average sediment loads from those two sites should approximate the load at the Birch Creek at the Bridge site. However, the load at the latter site is much greater than the sum of

the upper two sites, indicating that last summer much of the lower Birch Creek load was picked up from the channel bottom.

Of note is that of the two main placer mining areas in the Birch Creek drainage - Crooked **Creek and** Birch Creek above Twelvemile Creek - mining in the Crooked Creek drainage in 1986 contributed approximately twice as much load to Birch Creek as mining in the Birch Creek drainage above Twelvemile Creek did.

The impact of mining on streams in the Birch Creek drainage can be judged by comparing the loads of Mammoth and Boulder Creeks, two neighboring, similarly-sized creeks. Mammoth Creek is mined and has an area of approximately 42 square miles. Boulder Creek is presently unmined, although has had historical mining, and has an area of 33 square miles. Boulder Creek has seventy-eight percent of the area of the Mammoth Creek but only two percent of the sediment load.

Data from Faith Creek demonstrate the effect flood events can have on sediment loads. The largest flood of the summer in Faith Creek was on August 21-22. The average load for that month was 548 tons per day. However, if the load estimates from August 21-22 are removed, the average drops to 44.8 tons per day for the month of August which is similar to the averages of the other months. At the other sites flood events did not have as dramatic an effect on the averages.

Sediment load is a **good** measure of whether pollution from mining has decreased during the last three years of data collection because it describes the total amount of sediment being moved by a stream, as compared to a concentration which describes the amount of sediment in a standard volume of stream water. The extensive TSS data needed to calculate sediment load was only collected at automated sites during the 1986 summer. Turbidity has been monitored at a number of sites for the past three years and can be multiplied by discharge to compare the amount of turbidity at these sites. Table 6 shows monthly average turbidity index loads (TIL) at the sites monitored for the past three years. At most sites affected by mining TIL has decreased each year. The magnitude of the decrease should be compared with the results at the sites unaffected by mining (Bedrock and Boulder Creeks) which show substantial increases. One explanation of this is that non-point source sedimentation increases (evidence from the unmined streams) are masking to a degree the decrease in point source sedimentation (mine effluent). Thus, turbidity from point sources may be decreasing more than is indicated by the monitoring. However, the TIL for unmined streams is so small that only a small fluctuation in turbidity results in a large percentage change. Apparent from Table 6 is that large decreases in TIL in streams affected by mining will be necessary before they are within the TIL ranges of the unmined streams.

Table 6. Turbidity index loads for period of record
Units are **NTU-cfs/1000**

Location	Year	June	July	Aug	Sep	Avg Chng from previous year (%)
Averages of discrete observations						
Albert at Steese	86	3.6	0.60	0.002	0.074	
Bedrock at Steese	84			0.002	0.002	
	85	0.025	0.001	0.007	0.005	244
	86	0.016	0.090	0.001	0.005	196
Crooked at Cntrl	84			35.2	36.7	
	85	58.1	43.4	34.6	29.3	-11.0
	86	28.4	22.2	2.6	193	49.1
Deadwood at CHSR	84			12.0	7.5	
	85	53.6	11.0	9.0	8.3	-11.4
	86	1.4	0.9	0.2	0.9	-95.8
Ketchem at CHSR	84			8.7	0.7	
	85	3.1	6.4	9.7	21.5	234
	86	1.8	0.6	0.2	2.0	-88.4
Porcupine ab Mth	85		1.7	16.4	23.9	
	86	3.7	2.8	0.5	11.5	-64.8
Averages of continuous observations except where noted ¹						
Birch ab 12Mile	86	52.8	25.1	16.9	19.2	
Birch at Bridge	85	2161	39.3¹	67.61	68.21	
	86	295¹	2611		15.8¹	13.0
Crooked ab Mth	85	73.8¹	44.4	45.9¹	30.9¹	
	86	95.5	28.3	2.6	9.7¹	-30.2
Boulder nr Steese	85		0.029¹	0.009¹	0.015¹	
	86	0.13	0.10	0.014	0.013	138
Mammoth at Steese	84			11.8¹	19.6¹	
	85	26.7 ¹	7.9 ¹	10.2 ¹	17.2 ¹	-12.9
	86	19.7	8.3	5.8	14.1	-22.6

Of note is the importance and value of automated samplers and water level recorders for the 1986 monitoring. Use of automated equipment allowed sampling during extreme events and development of a continuous record throughout the summer. The ability to do this is a significant improvement over the collection of many discrete samples and observations as done in previous years. The equipment is not

foolproof - beavers chewed through several transducer lines and intake hoses, a bear attacked a sampler at one location, transducers and batteries failed, and at times the correct buttons were not pushed. However, without the automatic equipment the record would be much less complete and the flood data from 1986 would not have been collected. Any plans for season-long monitoring of placer mining should include the use of automated equipment.

D. Mammoth Creek Intensive Study.

The results of individual sampling during the Mammoth Creek Intensive Study are presented in Appendix 5. Appendix 8 describes the specifics of each mining operation within the study reach. The study period can be characterized by steady-state conditions. No precipitation fell immediately before or during the sampling period and creek water levels remained relatively unchanged. Mining operations, with one exception, were constant. The one exception was at mine site 2 where the operator moved in during the sampling period. Because of the relatively stable conditions it was possible to combine the data contained in Appendix 5 to show the average conditions during the study period. These results are shown in Table 7 and graphically represented in Figure 5. Below is a narrative of **the** results of the intensive study.

Independence Creek, one of the headwater tributaries of Mammoth

Creek, starts as a small, crystal-clear stream with low TSS values (#1 in table 7. and figure 5.). After the first mine site (GAM), which used recycling methods with low effluent discharge, TSS raises noticeably (2). The creek is still a relatively clear stream at this point. Below the second mine site (May) the TSS and load approximately doubles (3). This operation moved in during the sampling period and


Table 7. Average discharge, turbidity, TSS and sediment load
Mammoth Creek Intensive Study, 7/30-8/1, 1986

	Location	Turbidity (NTU)	TSS (mg/l)	Discharge (cfs)	Load tons/day	TIL ¹ (KNTU-cfs)
1	Independence ab GAM	0.5	2.81	1.7	0.013	0.001
2	Independence b GAM	151	186	2.9	1.46	0.44
3	Independence b May	279	374	3.6	3.64	1.00
4	Independence ab mth	248	360	3.7	3.60	0.92
5	Mastodon ab mth	2.2	3.45	7.5	0.070	0.02
6	Mammoth at head	111	120	11.1	3.60	1.23
7	Mammoth ab L eff	124	132	10.5	3.74	1.30
8	Loud Effluent	432	195	0.25	0.13	0.11
9	AV Diversion	69	107	5.7	1.65	0.39
10	Mammoth b AVdiv	106	114	6.2	1.91	0.66
11	Miller ab Rd	0.51	1.41	0.5	0.002	0.000
12	AV eff ab Rd	3525	9180	14²	347	49.4
13	AV eff b pond	433	345	7.7	7.17	3.33
14	AV eff ab Mammoth	388	284	7.7	5.90	2.99
15	Mammoth ab AV eff	75	46.3	9.7	1.21	0.73
16	Mammoth b AV eff	255	183	21	10.4	5.36
17	Dugas b sluice	14000	30100	2.3	187	32.2
18	Dugas ab Mammoth	527	334	2.4	2.16	1.26
19	Mammoth ab Dugas	230	163	20	8.8	4.60
20	Mammoth at Steese	260	185	22	11.0	5.72

¹TIL is turbidity index load which is the product of turbidity and discharge divided by 1000.

²approximately 7 cfs of this is seepage from Miller Creek through tailings.

Figure 5. Schematic diagram of intensive study results

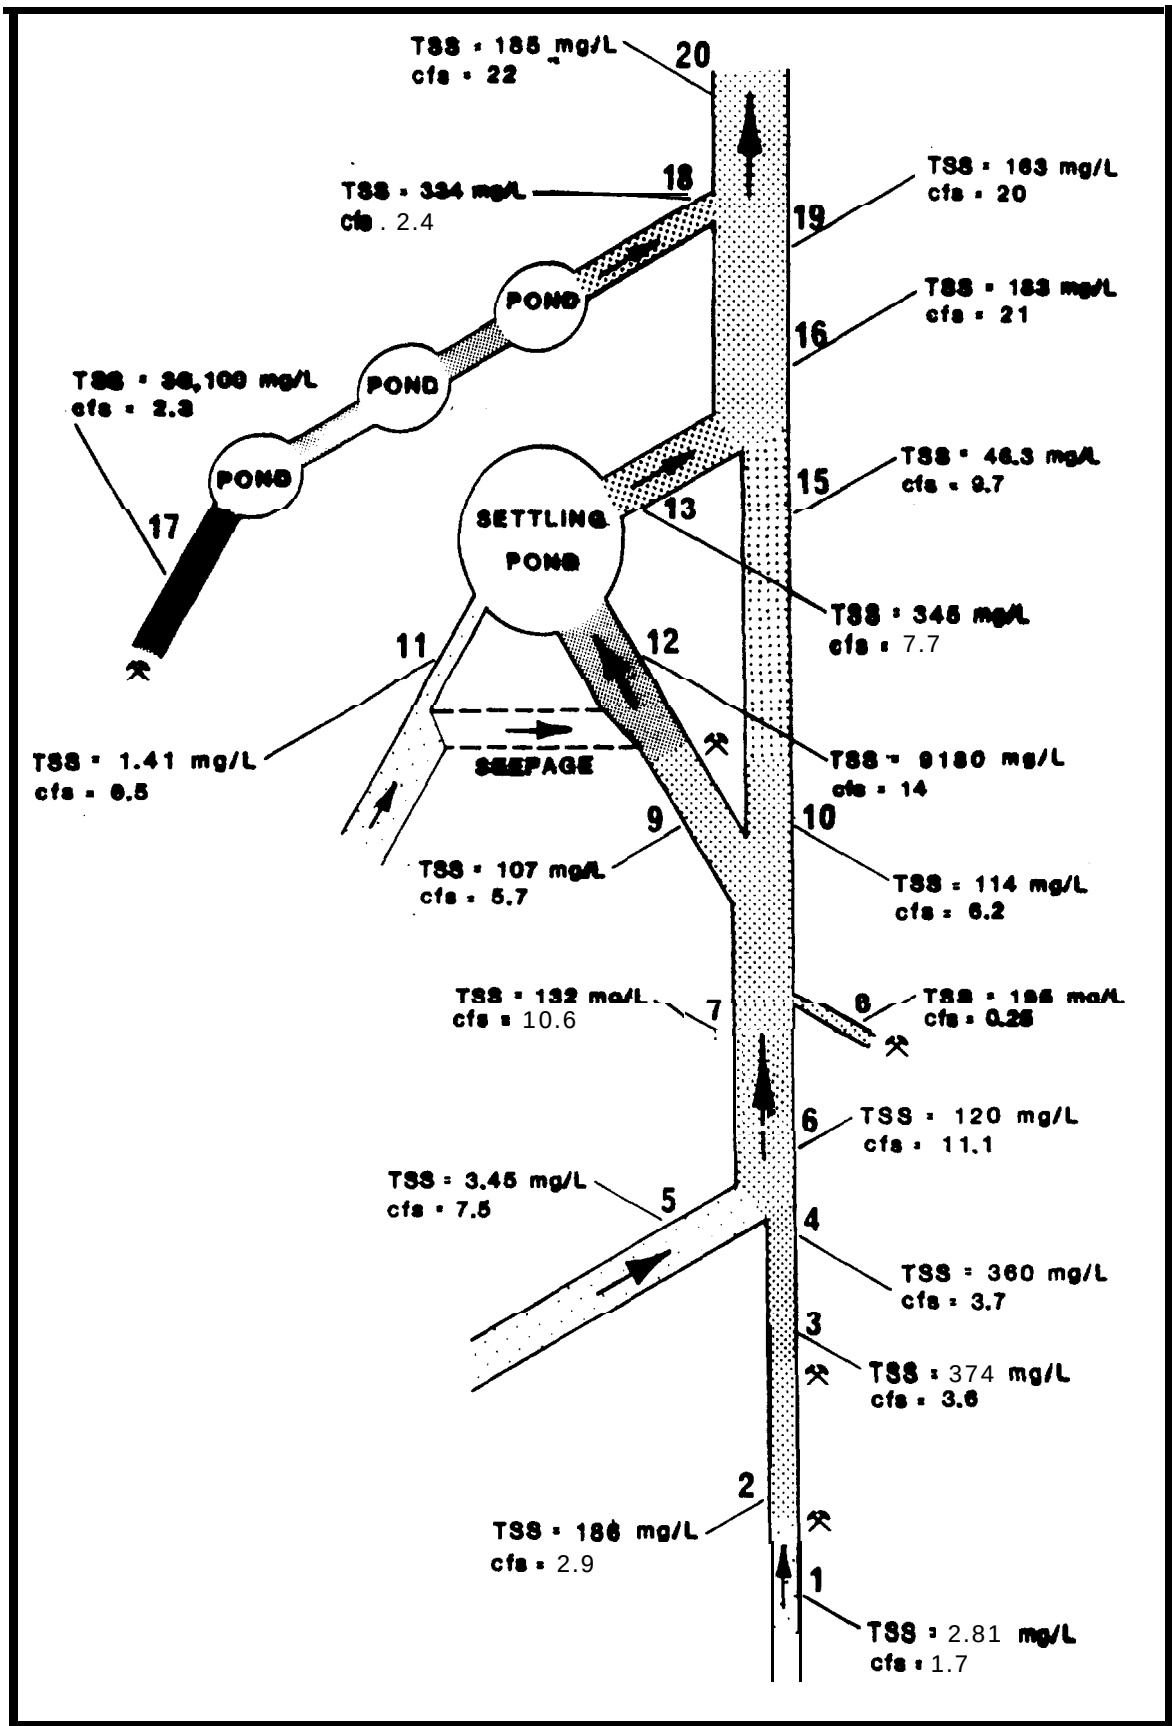

was never in a production mode during the sampling period. Independence stays near the TSS and load levels of site 3 until it meets Mastodon Creek (5) to form Mammoth Creek. The clear water of Mastodon Creek dilutes Independence Creek so that the TSS concentration drops appreciably (360 **mg/L** to 120 **mg/L**) (6).

Mammoth Creek next passes by mine site 3 (Loud) which is an operation using recycling methods. During the sampling period little effluent from the Loud operation was entering Mammoth Creek (8). Below the Loud operation Mammoth Creek was diverted into two channels of approximately **equal** size. The left channel (9) was for process water for mine site 4 (Alaska Ventures) and the right channel (10) was a bypass.

Below Alaska Ventures the left channel of Mammoth Creek becomes a tail race leading into the Alaska Ventures settling pond. Above the sampling site (12) approximately 7 cfs from Miller Creek seep through tailings piles into the tail race channel, effectively doubling the flow. The portion of Miller Creek that did not seep into the tail race was diverted into the settling pond to bypass mine site 5 (**Dugas**). The settling pond removes most of the load of the tail race; however, the load below the settling pond (13) is much larger than above the Alaska Ventures mining operation (9).

The right, bypass channel (15) of Mammoth Creek lost some its load

above the confluence with the Alaska Ventures settling pond effluent (deposition?) and increased flow by over fifty percent. Below the confluence with the settling pond effluent (16), Mammoth Creek is more than the sum of its parts - near this area inflow from several overland and, perhaps, ground-water sources was occurring. 14 cfs enter the Alaska Ventures settling pond. Only 10 cfs were measured leaving by surface outlets - the settling pond effluent, 7.7 cfs, and **Dugas** mine operation, 2.3 cfs. Assuming the settling pond was at a steady state, four cfs must be lost to ground-water outflow which probably finds its way to the Mammoth Creek main channel.

The **Dugas** mine operation obtains water from seepage from the Alaska Ventures settling pond. Effluent travels via a long channel through three small settling ponds and from there to Mammoth Creek just above the Steese Highway bridge. The downstream point of the Study was Mammoth Creek at the Steese Highway Bridge (20) where the TSS concentration was 185 **mg/L** and the average sediment load was 11 tons per day. Of this load approximately 0.12 tons per day come from the measured clear-water tributaries (Independence, Mastodon and Miller Creeks) that make up most of the flow in Mammoth Creek, 3.6 tons per day from the first three mine operations, 5.2 tons per day from Alaska Ventures, and 2.2 tons per day from **Dugas**. During the study period deposition in the channel averaged 2 tons per day.

The above description used sediment loads, the product of TSS and

discharge, in the discussion of the sediment balance. Turbidity index loads (the product of turbidity and discharge) used in the same manner would have achieved the same result.

One of the objectives of the study was to examine changes in settleable solids along the study reach. Because of the normal-to-low flows in Mammoth Creek and the treatment efforts of the miners, settleable solids levels at all locations, except directly below sluicing, were mostly in the trace range, below the lower detection limit of an Imhoff cone (see Appendix 5). This illustrates a problem with using settleable solids as a management guideline for managing sediment-laden effluent discharges - samples below the lower detection limit can still have significant and varying amounts of sediment.

The most obvious lesson from the data is that lower total water use results in lower loads added to the stream. For example, if Miller Creek could have been routed away from the Alaska Ventures settling **pond**, sediment levels in Mammoth Creek would have been measurably better. The increased flow through the pond decreased the settling efficiency of the pond and resulted in higher settling pond effluent discharges. The operators that released less water had less impact on the stream.

It should be noted that during the study period mine effluent was not the only impact on stream sediment loads. No sluicing was

occurring at mine site 2 yet turbidity and TSS values were elevated, probably by dirt work related to setting up the mining operation.

The average sediment load at the Steese Highway site for the study period (11 tons per day) was low compared to the average for the summer (75 tons per day). Much of this difference can be attributed to high flows in June. However, in September when no large storms occurred and flows were normal and steady through the month, sediment load at the Steese Highway bridge site averaged 66 tons per day. For this magnitude of change to have occurred late summer practices must have been different than those observed during the study period.

E. Alaska Department of Fish & Game data.

Appendix 6 has data from samples that were collected by **ADF&G** and analyzed in the DGGS laboratory. These data are mostly from samples collected by an automated sampler located on Faith Creek, but also include samples from other sites in the upper Chatanika drainage, samples from Goldstream Creek sites, and samples from Spring breakup. **ADF&G** has used these data for interpretive reports published elsewhere and for internal reports and memorandum. The data are published here to ensure availability to the public.

F. Miscellaneous data.

Included in Appendix 7, Miscellaneous data, are data from two short term, multi-agency, multi-site samplings in the Birch Creek drainage, and data from samples collected outside the Birch Creek drainage.

Fewer samples were collected in 1986 by the Alaska Division of Parks and Outdoor Recreation than in previous years. The results for the three sites sampled show low turbidity levels in most instances.

A disappointment was the lack of response from the Village Water Quality Monitoring program. Sample bottles and mailers were provided for Evansville, Tanana, Birch Creek Village, and **Minto**. Only Evansville sent more than one sample back. For this program to provide useful information samples should be on at least a weekly frequency during the summer. The results from the Koyukuk River at Evansville show some high turbidity readings. The samples are mostly from early in the summer and may reflect high flows from spring breakup.

REFERENCES CITED

- Alaska Department of Environmental Conservation, 1979. Water Quality Standards. Alaska Water Quality Pollution Control Program, Juneau, Alaska, 34 pp.
- APHA**, 1985. Standard Methods for the Examination of Water and Wastewater. Sixteenth Edition. Washington, D.C. 1268 pp.
- Mack**, Stephen F., 1986. Turbidity-Total Suspended Sediment Relationships in Mined Streams in Interior Alaska. Alaska Division of Geological and Geophysical Surveys, PDF 86-84, October 1986, Fairbanks, Alaska.
- Mack**, Stephen F. and Mary A. **Moorman**, 1986. Hydrologic and Water-Quality Investigations Related to the Occurrence of Placer Mining in Interior Alaska, Summers 1984-85. Alaska Division of Geological and Geophysical Surveys, PDF 86-16, July 1986, Fairbanks, Alaska.
- Neter, John, William Wasserman, and Michael H. Kutner, 1985. Applied Linear Statistical Models. Second Edition, Richard D. Irwin, Inc., Homewood, Illinois, 1127 pp.
- SAS Institute **Inc.**, 1985a. SAS Users's Guide: Basics. 1985 Edition, SAS Institute, Cary, North Carolina, 921 pp.
- SAS Institute Inc., 1985b. SAS Users's Guide: Statistics. 1985 Edition, SAS Institute, Cary, North Carolina, 584 pp.

Appendices for 1986 Placer Mining Water Quality report

1. Data from automatic samplers in Birch Creek Drainage.

Birch Creek above 12Mile Creek	37
Birch Creek at Bridge.....	39
Boulder Creek at USGS gage.....	40
Crooked Creek above mouth.....	42
Mammoth Creek at Steese Highway.....	44

2. Data from non-automated monitoring sites, Birch Creek drainage.

Birch Creek above Crooked Creek	48
Albert Creek at Steese Highway.....	48
Bedrock Creek at campground.....	48
Crooked Creek at Central.....	49
Deadwood Creek at CHSR.....	49
Ketchem Creek at CHSR.....	50
Porcupine Creek above mouth.....	50

3. Settleable solids data from all sources by site.....5 2

4. Discharge data from automated sites.

A. Faith Creek above the Steese Highway.....6	2
B. Mammoth Creek at the Steese Highway.....6	3
c. Birch Creek above 12Mile Creek.....	64
D. Crooked Creek above mouth.....	65
E. Birch Creek above Bridge.....	66

5. Data from Mammoth Creek intensive study, July **29-August** 3, 1986 67

6. Data collected by **ADF&G**

A. Faith Creek at Steese Highway.....	73
B. Other Chatanika Creek Drainage data.....7	8
C. Data from Goldstream valley sites.....	79
D. Breakup Samples.....	80

7. Miscellaneous data

A. Data collected by DEC, June 5-6, 1986 8	1
B. Data from ADF&G and DOM Helicopter flyover of Birch Creek..	8 1
c. Turbidity data from Tolovana River.....8	2
D. Turbidity data collected by Division of Parks.....8	2
E. Turbidity data from rural villages.....8	3

a. Description of mining operations in Mammoth Creek intensive study a 4

9. **Specific locations of study** sites 87

Appendix 1. Data from automatic samplers in Birch Creek drainage

Location			Date	Time	Turbidity (NTU)	TSS (mg/L)	Discharge (cfs)	Sed. load (tons/day)
Birch	ab	12mile	060586	1630	310		208	
Birch	ab	12mile	060686		350	1030	164	457
Birch	ab	12mile	060786		320	559	150	226
Birch	ab	12mile	060886		320	476	130	167
Birch	ab	12mile	060986		240	348	176	166
Birch	ab	12mile	061086		600	1080	229	668
Birch	ab	12mile	061186		130	337	211	192
Birch	ab	12mile	061286		340	852	436	1003
Birch	ab	12mile	061386		160	552	269	401
Birch	ab	12mile	061486		150	340	143	131
Birch	ab	12mile	061586		260	359	95.8	92.9
Birch	ab	12mile	061686		190	277	55.0	41.1
Birch	ab	12mile	061686	1448	160	211		
Birch	ab	12mile	061786		110	491	43.7	57.9
Birch	ab	12mile	061886		210	275	59.7	44.4
Birch	ab	12mile	061986		390	1390	354	1330
Birch	ab	12mile	062086		320	1280	286	989
Birch	ab	12mile	062186		210	833	290	651
Birch	ab	12mile	062286		190	577	286	446
Birch	ab	12mile	062386		260	1210	460	1503
Birch	ab	12mile	062486		330	987	440	1173
Birch	ab	12mile	062586		180	545	245	361
Birch	ab	12mile	062586	1520	200	390		
Birch	ab	12mile	062686		100	308	177	147
Birch	ab	12mile	062786		150	190	145	74.5
Birch	ab	12mile	062886		330	294	126	100
Birch	ab	12mile	062986		180	125	106	35.6
Birch	ab	12mile	063086		400	164	101	44.6
Birch	ab	12mile	070186		500	506	161	220
Birch	ab	12mile	070286		150	147	135	53.7
Birch	ab	12mile	070386		160	122	113	37.3
Birch	ab	12mile	070486		160	92.2	110	27.4
Birch	ab	12mile	070586		230	139	98.7	37.0
Birch	ab	12mile	070686		150	57	81.2	12.5
Birch	ab	12mile	070786		190	106	70.1	20.1
Birch	ab	12mile	070886		220	129	63.1	22.0
Birch	ab	12mile	070886	1250	240	137		
Birch	ab	12mile	070986		250	178	72.9	35.1
Birch	ab	12mile	071086		290	181	70.8	34.6
Birch	ab	12mile	071186		260	223	90.3	54.3
Birch	ab	12mile	071286		230	128	141	48.7
Birch	ab	12mile	071386		200	269	115	83.7
Birch	ab	12mile	071486		340	199	102	55.0
Birch	ab	12mile	071586		450	260	86.4	60.7
Birch	ab	12mile	071686		500	208	74.0	41.5
Birch	ab	12mile	071786		550	331	67.0	59.9

Appendix 1. Data from automatic samplers in Birch Creek drainage.						
Location	date	time	turbidity (NTU)	TSS (mg/L)	discharge (cfs) ¹	sed. load (tons/day)
Birch ab 12mile	071886		600	404	62.9	68.7
Birch ab 12mile	071986		550	326	69.8	61.4
Birch ab 12mile	072086		550	876	255	603
Birch ab 12mile	072186		200	282	251	191
Birch ab 12mile	072286		150	172	216	100
Birch ab 12mile	072386		60	61.8	142	23.6
Birch ab 12mile	072386	1250	40	38.2		
Birch ab 12mile	072486		75	86.7	118	27.7
Birch ab 12mile	072586		170	133	106	37.9
Birch ab 12mile	072686		220	215	136	79.1
Birch ab 12mile	072786		140	234	235	149
Birch ab 12mile	072886		95	118	235	74.9
Birch ab 12mile	072986		180	141	148	56.3
Birch ab 12mile	073086		160	122	122	40.1
Birch ab 12mile	073186		170	138	112	41.6
Birch ab 12mile	080186		330	309	110	92.0
Birch ab 12mile	080286		290	259	104	72.4
Birch ab 12mile	080386		260	209	89.2	50.3
Birch ab 12mile	080486		230	191	78.1	40.3
Birch ab 12mile	080586		360	298	71.5	57.5
Birch ab 12mile	080686		400	311	65.4	54.9
Birch ab 12mile	080786		450	401	58.0	62.8
Birch ab 12mile	080886		230	94	53.8	13.6
Birch ab 12mile	080986		150	73.3	50.1	9.9
Birch ab 12mile	081086		100	73.3	43.0	8.5
Birch ab 12mile	081186		190	121	42.9	14.0
Birch ab 12mile	081286		140	85.7	38.6	a.9
Birch ab 12mile	081386		230	150	36.7	14.9
Birch ab 12mile	081486		400	392	35.2	37.2
Birch ab 12mile	081586		200	126	31.9	10.9
Birch ab 12mile	081686		260	181	31.9	15.6
Birch ab 12mile	081786		170	97.2	31.5	8.3
Birch ab 12mile	081886		130	78.7	30.7	6.5
Birch ab 12mile	081986		160	163	28.7	12.6
Birch ab 12mile	082086		290	214	30.9	17.9
Birch ab 12mile	082086	1245	290	214		
Birch ab 12mile	082186		200	180	74.0	36.0
Birch ab 12mile	082286		340	355	130	125
Birch ab 12mile	082386		340	343	111	103
Birch ab 12mile	082486		290	285	95.9	73.8
Birch ab 12mile	082586		230	170	82.3	37.8
Birch ab 12mile	082686		290	214	75.5	43.6
Birch ab 12mile	082786		290	232	72.1	45.2
Birch ab 12mile	082886		200	206	125	69.4
Birch ab 12mile	082986		95	84.1	142	32.3
Birch ab 12mile	083086		100	73.8	123	24.6
Birch ab 12mile	083186		230	150	114	46.0
Birch ab 12mile	090186		240	151	102	41.6

Appendix 1. Data from automatic samplers in Birch Creek drainage.			Location	date	time	turbidity (NTU)	TSS (mg/L)	discharge (cfs)	sed. load (tons/day)
Birch	ab	12mile	090286			260	174	94.8	44.5
Birch	ab	12mile	090386			210	164	87.1	38.6
Birch	ab	12mile	090486			380	301	76.1	61.9
Birch	ab	12mile	090586			450	331	70.6	63.1
Birch	ab	12mile	090686			280	222	65.6	39.3
Birch	ab	12mile	090786			400	260	59.8	42.0
Birch	ab	12mile	090886			380	275	64.2	47.6
Birch	ab	12mile	090986			350	268	98.3	71.1
Birch	ab	12mile	091086			450	364	91.5	90.0
Birch	ab	12mile	091086	1215		330	291		
Birch	ab	12mile	091186			450	399	86.0	92.7
Birch	ab	12mile	091286			340	325	78.5	68.9
Birch	ab	12mile	091386			290	286	72.6	56.0
Birch	ab	12mile	091486			320	344	63.2	58.7
Birch	ab	12mile	091586			320	354	63.0	60.2
Birch	ab	12mile	091686			230	181	65.5	32.0
Birch	ab	12mile	091786			300	224	68.4	41.4
Birch	ab	12mile	091886			190	164	98.0	43.4
Birch	ab	12mile	091986			180	199	80.0	43.0
Birch	ab	12mile	092086			170	175	81.6	38.6
Birch	ab	12mile	092186			39	58	77.6	12.1
Birch	ab	12mile	092286			110	153	72.8	30.1
Birch	ab	12mile	092386			150	206	66.8	37.1
Birch	ab	12mile	092486			140	190	60.7	31.1
Birch	ab	12mile	092586			55	121	67.5	22.1
Birch	ab	12mile	092586	1800		60	145		
Birch	at	bridge	052386			18	160	1380	596
Birch	at	bridge	052386	1500		14			
Birch	at	bridge	052486			18	143		
Birch	at	bridge	052586			14	86.3		
Birch	at	bridge	052686			23	176		
Birch	at	bridge	052786			37	290		
Birch	at	bridge	052886			23	162		
Birch	at	bridge	052986			9.8	48.8		
Birch	at	bridge	053086			9.7	32.6		
Birch	at	bridge	053186			23	99.2		
Birch	at	bridge	060186			40	305		
Birch	at	bridge	060286			110	806		
Birch	at	bridge	060386			110	696		
Birch	at	bridge	060686	1040		20		1880	
Birch	at	bridge	061786	1555		14		1220	
Birch	at	bridge	062086			160	1220	9030	29745
Birch	at	bridge	062186			180	840	8860	20094
Birch	at	bridge	062286			65	318	5270	4525
Birch	at	bridge	062386			45	343	5080	4705

Appendix 1. Data from automatic samplers in Birch Creek drainage.			Location	date	time	turbidity (NTU)	TSS (mg/L)	discharge (cfs)	sed. load (tons/day)
Birch	at	bridge	062486			80	587	10700	16958
Birch	at	bridge	062486	1300		130	1060		
Birch	at	bridge	062586	1045		80	584	11100	17502
Birch	at	bridge	062686			40	415	4830	5412
Birch	at	bridge	062786			28	250	2800	1890
Birch	at	bridge	062886			18	182	1940	953
Birch	at	bridge	070286			90	660	4640	8268
Birch	at	bridge	070386			60	600	2390	3872
Birch	at	bridge	070986	1350		9.1	23	785	48.8
Birch	at	bridge	071186			28	381	1570	1615
Birch	at	bridge	071286			55	424	6830	7819
Birch	at	bridge	071386			27	176	6190	2941
Birch	at	bridge	072186			110	749		
Birch	at	bridge	072286			80	325		
Birch	at	bridge	072386			24	280		
Birch	at	bridge	072386	1710		23	272	2820	2071
Birch	at	bridge	072486			13	76.4		
Birch	at	bridge	072886			13	80.3		
Birch	at	bridge	072986			34	448		
Birch	at	bridge	073086			18	141		
Birch	at	bridge	073186			8.0	58.6		
Birch	at	bridge	082186	1015		6.3	3.78	700	7.1
Birch	at	bridge	090986	1115				804	
Birch	at	bridge	091086			19	33.7		
Birch	at	bridge	091186			24	54.2		
Birch	at	bridge	091286			23	25.1		
Birch	at	bridge	091386			23	23.3		
Birch	at	bridge	091486			20	43.8		
Birch	at	bridge	091586			18	55.4		
Birch	at	bridge	091686			17			
Birch	at	bridge	091786			10	26.1		
Birch	at	bridge	091886			15	27.8		
Birch	at	bridge	091986			14	64.8		
Birch	at	bridge	092086			12	4.00		
Birch	at	bridge	092186			16	17.0		
Birch	at	bridge	092286			19	144		
Birch	at	bridge	092386			28	170		
Birch	at	bridge	092486			15	57.3		
Birch	at	bridge	092586			33	84.6		
Birch	at	bridge	092586	1305		17	67.3	853	155
Boulder	at	gage	052386	1745		3.7			
Boulder	at	gage	060586	1927		3.4			
Boulder	at	gage	061886	1200					
Boulder	at	gage	061986			16	140		
Boulder	at	gage	062086			10	78.3		
Boulder	at	gage	062186			3.7	38.2		

Appendix 1.	Data	from	automatic	samplers	in	Birch Creek	drainage.
Location		date	time	turbidity	TSS	discharge	sed. load
				(NTU)	(mg/L)	(cfs)	(tons/day)
Boulder	at	gage	062286	3.2	14.4		
Boulder	at	gage	062486	2.6	27.8		
Boulder	at	gage	062486	3.3	13.2		
Boulder	at	gage	062586	2.1	18.0		
Boulder	at	gage	062686	1.9	10.5		
Boulder	at	gage	062786	1.0	5.0		
Boulder	at	gage	062886	0.9	4.3		
Boulder	at	gage	062986	0.8	1.6		
Boulder	at	gage	063086	0.7	2.1		
Boulder	at	gage	070186	32	291		
Boulder	at	gage	070286	8.7	66.4		
Boulder	at	gage	070386	2.9	37.8		
Boulder	at	gage	070486	3.4	20.2		
Boulder	at	gage	070586	1.9	9.3		
Boulder	at	gage	070686	2.1	6.0		
Boulder	at	gage	070786	1.7	5.5		
Boulder	at	gage	070886	0.7	2.0		
Boulder	at	gage	070986	20	90.9		
Boulder	at	gage	070986	4.9			
Boulder	at	gage	070986	16			
Boulder	at	gage	071086	6.5	44.8		
Boulder	at	gage	071086	2.3			
Boulder	at	gage	071186	9.6	85.1		
Boulder	at	gage	071286	5.9	49.0		
Boulder	at	gage	071386	2.6	14.7		
Boulder	at	gage	071486	1.5	9.4		
Boulder	at	gage	071586	1.2	6.4		
Boulder	at	gage	071686	1.1	1.2		
Boulder	at	gage	071786	0.8	1.2		
Boulder	at	gage	071886	1.0	1.9		
Boulder	at	gage	071986	0.6			
Boulder	at	gage	072086	0.7	1.6		
Boulder	at	gage	072186	2.7	13.1		
Boulder	at	gage	072286	1.0	4.4		
Boulder	at	gage	072386	0.8	2.8		
Boulder	at	gage	072386	1.4	5.4		
Boulder	at	gage	072486	2.1			
Boulder	at	gage	072586	1.7	10.0		
Boulder	at	gage	072686	1.3	5.6		
Boulder	at	gage	072786	1.2	13.9		
Boulder	at	gage	072886	1.8	10.1		
Boulder	at	gage	072986	2.2	5.6		
Boulder	at	gage	073086	0.8	3.3		
Boulder	at	gage	073186	4.2	26.9		
Boulder	at	gage	080186	2.2	9.9		
Boulder	at	gage	080286	2.4	11.2		
Boulder	at	gage	080386	1.1	3.2		
Boulder	at	gage	080486	0.7	3.4		

Appendix 1. Data from automatic samplers in Birch Creek drainage.			Location		Date		Time	Turbidity	TSS	Discharge	Sed. Load
								(NTU)	(mg/L)	(cfs)	(tons/day)
Boulder	at	gage	080586					1.4	5.5		
Boulder	at	gage	080686					0.6	3.5		
Boulder	at	gage	080786					2.0	16.7		
Boulder	at	gage	080886					1.1	2.6		
Boulder	at	gage	080986					0.6	2.8		
Boulder	at	gage	081086					0.8	2.0		
Boulder	at	gage	081186					0.7	2.0		
Boulder	at	gage	081286					1.0	6.2		
Boulder	at	gage	081386					0.6	6.9		
Boulder	at	gage	081486					0.7	9.6		
Boulder	at	gage	081586					0.6	4.9		
Boulder	at	gage	081686					0.9	7.2		
Boulder	at	gage	081786					1.0	2.3		
Boulder	at	gage	081886					0.8	24.6		
Boulder	at	gage	081986					0.6	3.6		
Boulder	at	gage	082086					0.9	19.0		
Boulder	at	gage	082086	1600				0.6	0.8		
Boulder	at	gage	082186					2.8	11.3		
Boulder	at	gage	082286					0.6	5.3		
Boulder	at	gage	082386					2.1	13.4		
Boulder	at	gage	082486					0.7	3.0		
Boulder	at	gage	082586					0.8	4.3		
Boulder	at	gage	082686					0.8	3.5		
Boulder	at	gage	082786					0.7	1.9		
Boulder	at	gage	082886					2.4	21.2		
Boulder	at	gage	082986					12	115		
Boulder	at	gage	083086					9.3	88.4		
Boulder	at	gage	083186					4.2	36.5		
Boulder	at	gage	090186					2.0	15.1		
Boulder	at	gage	090286					1.3	8.9		
Boulder	at	gage	090386					0.9	6.9		
Boulder	at	gage	090486					1.0	4.7		
Boulder	at	gage	090586					0.5	3.1		
Boulder	at	gage	090686					0.7	3.7		
Boulder	at	gage	090786					1.0	4.6		
Boulder	at	gage	090886					1.3	4.9		
Boulder	at	gage	090986					1.1	4.3		
Boulder	at	gage	090986	1820				1.0	1.3		
Boulder	at	gage	092586	1555				4.6	64.6		
Crooked	ab	mouth	052386	1650				25			
Crooked	ab	mouth	060686	1250				75			
Crooked	ab	mouth	061786	1045				34		235	
Crooked	ab	mouth	061886					56	311	635	533
Crooked	ab	mouth	061986					170	669	1590	2872
Crooked	ab	mouth	062086					270	1380	1290	4807
Crooked	ab	mouth	062186					220	893	899	2167

Appendix 1. Data from automatic samplers in Birch Creek drainage.		Location	Date	Time	Turbidity (NTU)	TSS (mg/L)	Discharge (cfs)	Sed. load (tons/day)
Crooked	ab	mouth	062286		130	660	895	1595
Crooked	ab	mouth	062386		120	651	1860	3269
Crooked	ab	mouth	062486		100	514	1380	1915
Crooked	ab	mouth	062586		230	576	793	1234
Crooked	ab	mouth	062586	1135	120	590		
Crooked	ab	mouth	062686		35	330	578	515
Crooked	ab	mouth	062886		31	126	384	131
Crooked	ab	mouth	062986		25	100	332	90
Crooked	ab	mouth	063086		22	73	523	103
Crooked	ab	mouth	070186		19	72.4	726	142
Crooked	ab	mouth	070286		55	376	504	512
Crooked	ab	mouth	070386		50	333	390	351
Crooked	ab	mouth	070486		40	143	343	132
Crooked	ab	mouth	070586		33	103	289	80
Crooked	ab	mouth	070686		38	95.1	236	61
Crooked	ab	mouth	070786		35	85.7	200	46
Crooked	ab	mouth	070886		28	94.7	239	61
Crooked	ab	mouth	070986		40	158	467	199
Crooked	ab	mouth	070986	1100	36	87.5		
Crooked	ab	mouth	071086		200	504	600	817
Crooked	ab	mouth	071186		130	714	755	1455
Crooked	ab	mouth	071286		130	804	632	1372
Crooked	ab	mouth	071386		75	326	503	443
Crooked	ab	mouth	071486		40	184	413	205
Crooked	ab	mouth	071586		45	135	343	125
Crooked	ab	mouth	071686		38	85.1	295	67.8
Crooked	ab	mouth	071786		24	66.1	237	42.4
Crooked	ab	mouth	071886		33	77.7	196	41.2
Crooked	ab	mouth	071986		40	78.5	242	51.2
Crooked	ab	mouth	072086		75	124	1218	408
Crooked	ab	mouth	072186		90	201	769	417
Crooked	ab	mouth	072286		110	149	495	199
Crooked	ab	mouth	072386		85	102	336	92.5
Crooked	ab	mouth	072386	1800	65	80.6		
Crooked	ab	mouth	072486		75	234	251	159
Crooked	ab	mouth	072586		75	95.4	209	53.7
Crooked	ab	mouth	072686		90	102	472	130
Crooked	ab	mouth	072786		90	82.3	660	147
Crooked	ab	mouth	072886		100	85.7	479	111
Crooked	ab	mouth	072986		55	88.7	339	81.2
Crooked	ab	mouth	073086		25	56	255	38.6
Crooked	ab	mouth	073186		25	50.9		
Crooked	ab	mouth	080186		34	46		
Crooked	ab	mouth	080286		33	45.8		
Crooked	ab	mouth	080386		55	64.5		
Crooked	ab	mouth	080486		55	123		
Crooked	ab	mouth	080586		32	59.5		
Crooked	ab	mouth	082186	1400	24	16.5	71.7	3.2

Appendix 1. Data from automatic samplers in Birch Creek drainage.						
Location		date	time	turbidity (NTU)	TSS (mg/L)	discharge (cfs) sed. load (tons/day)
Crooked	ab	mouth	082286	32	88.8	
Crooked	ab	mouth	082386	39	104	
Crooked	ab	mouth	082486	23	50.0	
Crooked	ab	mouth	090986	1310 120	255	114 78.5
Crooked	ab	mouth	091086	90	69.6	
Crooked	ab	mouth	091186	95	69.2	
Crooked	ab	mouth	091286	85	72	
Crooked	ab	mouth	091386	75	46.7	
Crooked	ab	mouth	091486	85	68.5	
Crooked	ab	mouth	091586	90	60.8	
Crooked	ab	mouth	091686	85	50.6	
Crooked	ab	mouth	091786	110	66.2	
Crooked	ab	mouth	091886	70	43.3	
Crooked	ab	mouth	091986	65	35.8	
Crooked	ab	mouth	092086	75	43.4	
Crooked	ab	mouth	092186	95	69.4	
Crooked	ab	mouth	092286	90	70.1	
Crooked	ab	mouth	092386	90	60.9	
Crooked	ab	mouth	092486	100	70.6	
Crooked	ab	mouth	092586	1400 65	66.5	115 20.6
Mammoth	at	Steese	052386	65	438	39.9 47.2
Mammoth	at	Steese	052386	1135 40		
Mammoth	at	Steese	052486	70	551	31.4 4 6 . 7
Mammoth	at	Steese	052586	110	886	35.8 85.6
Mammoth	at	Steese	052686	95	649	39.8 69.7
Mammoth	at	Steese	052786	120	898	37.0 89.7
Mammoth	at	Steese	052886	120	765	29.0 59.8
Mammoth	at	Steese	052986	170	1001	28.7 77.7
Mammoth	at	Steese	053086	190	1228	43.6 144.6
Mammoth	at	Steese	060186	450	2397	95.2 616.3
Mammoth	at	Steese	060286	350	1443	106.8 416.1
Mammoth	at	Steese	060386	280	720	94.5 183.7
Mammoth	at	Steese	060486	330	939	81.7 207.0
Mammoth	at	Steese	060586	600	2400	94.2 610.3
Mammoth	at	Steese	060586	1750 950	3180	
Mammoth	at	Steese	060686	55	215	108.1 62.7
Mammoth	at	Steese	060786	120	560	85.9 1 2 9 . 8
Mammoth	at	Steese	060886	140	598	87.9 142.0
Mammoth	at	Steese	060986	170	500	109.5 147.9
Mammoth	at	Steese	061086	370	1320	83.1 2 9 6 . 3
Mammoth	at	Steese	061186	370	787	58.4 124.1
Mammoth	at	Steese	061286	270	1090	130.4 383.9
Mammoth	at	Steese	061386	250	577	91.1 141.9
Mammoth	at	Steese	061486	290	479	55.9 72.2
Mammoth	at	Steese	061586	200	346	36.8 34.4
Mammoth	at	Steese	061686	550	955	24.2 62.5

Appendix 1. Data from automatic samplers in Birch Creek drainage.			Location	date	time	turbidity (NTU)	TSS (mg/L)	discharge (cfs)	sed. load (tons/day)
Mammoth	at	Steese	061686	1730		180	207		
Mammoth	at	Steese	061786			180	238	15.9	10.2
Mammoth	at	Steese	061886			270	204	15.9	8.8
Mammoth	at	Steese	061986			340	750	94.4	191
Mammoth	at	Steese	062086			110	426	134.4	155
Mammoth	at	Steese	062186			450	1200	135.3	438
Mammoth	at	Steese	062286			110	314	97.5	82.7
Mammoth	at	Steese	062386			100	519	142.2	199
Mammoth	at	Steese	062386	1305		150	620		
Mammoth	at	Steese	062486			85	628	156.2	265
Mammoth	at	Steese	062586			50	160	93.8	40.5
Mammoth	at	Steese	062586	1400		70			
Mammoth	at	Steese	062686			110	144	62.4	24.3
Mammoth	at	Steese	062786			140	150	52.8	21.4
Mammoth	at	Steese	062886			130	159	45.0	19.3
Mammoth	at	Steese	062986			75	82.8	36.1	8.1
Mammoth	at	Steese	063086			280	233	36.1	22.7
Mammoth	at	Steese	070186			230	449	118.5	144
Mammoth	at	Steese	070286			130	201	91.0	49.4
Mammoth	at	Steese	070386			230	245	60.9	40.3
Mammoth	at	Steese	070486			300	329	44.1	39.2
Mammoth	at	Steese	070586			270	205	38.9	21.5
Mammoth	at	Steese	070686			280	192	35.3	18.3
Mammoth	at	Steese	070786			270	169	30.8	14.1
Mammoth	at	Steese	070886			220	143	62.1	24.0
Mammoth	at	Steese	070886	1445		180	89		
Mammoth	at	Steese	070986			160	478	70.6	91.1
Mammoth	at	Steese	070986	0930		140			
Mammoth	at	Steese	070986	1730		150			
Mammoth	at	Steese	071086			150	314	50.5	42.8
Mammoth	at	Steese	071086	1045		110			
Mammoth	at	Steese	071186			140	244	41.6	27.4
Mammoth	at	Steese	071286			100	298	44.5	35.8
Mammoth	at	Steese	071386			75	116	39.0	12.2
Mammoth	at	Steese	071486			40	61	33.9	5.6
Mammoth	at	Steese	071586			130	84.9	32.6	7.5
Mammoth	at	Steese	071686			210	128	29.3	10.1
Mammoth	at	Steese	071786			260	159	27.3	11.7
Mammoth	at	Steese	071886			250	142	23.9	9.2
Mammoth	at	Steese	071986			130	64.5	22.6	3.9
Mammoth	at	Steese	072086			100	104	29.6	8.3
Mammoth	at	Steese	072186			190	281	47.8	36.3
Mammoth	at	Steese	072286			280	357	43.8	42.2
Mammoth	at	Steese	072386			310	247	37.9	25.3
Mammoth	at	Steese	072386	1420		250	196		
Mammoth	at	Steese	072486			290	243	31.1	20.4
Mammoth	at	Steese	072586			250	174	29.3	13.8
Mammoth	at	Steese	072686			110	107	32.7	9.4

Appendix 1. Data from automatic samplers in Birch Creek drainage.			Location	date	time	turbidity	TSS	discharge	sed. load
						(NTU)	(mg/L)	(cfs)	(tons/day)
Mammoth	at	Steese	072786			90	179	38.5	18.6
Mammoth	at	Steese	072886			110	126	39.3	13.4
Mammoth	at	Stsese	072986			240	208	35.0	19.7
Mammoth	at	Steese	073086			310	217	31.0	18.2
Mammoth	at	Steese	073186			250	185	28.9	14.4
Mammoth	at	Steese	080186			210	152	25.5	10.5
Mammoth	at	Steese	080286			150	110	24.6	7.3
Mammoth	at	Steese	080386			140	83.4	24.7	5.6
Mammoth	at	Steese	080486			180	173	23.8	11.1
Mammoth	at	Steese	080586			200	193	20.7	10.8
Mammoth	at	Steese	080686			220	197	20.4	10.8
Mammoth	at	Steese	080786			220	187	19.7	9.9
Mammoth	at	Steese	080886			220	192	18.9	9.8
Mammoth	at	Steese	080986			240	187	19.2	9.7
Mammoth	at	Steese	081086			260	221	18.4	11.0
Mammoth	at	Steese	081186			250	169	18.1	8.3
Mammoth	at	Steese	081286			320	234	16.4	10.3
Mammoth	at	Steese	081386			310	240	14.8	9.6
Mammoth	at	Steese	081486			320	264	16.5	11.7
Mammoth	at	Steese	081586			220	175	12.3	5.8
Mammoth	at	Steese	081686			180	131	10.5	3.7
Mammoth	at	Steese	081786			160	115	11.9	3.7
Mammoth	at	Steese	081886			240	186	11.7	5.9
Mammoth	at	Steese	081986			250	185	10.4	5.2
Mammoth	at	Steese	082086			210	164	10.9	4.8
Mammoth	at	Steese	082086	1430		180	143		
Mammoth	at	Steese	082186			250	203	14.2	7.8
Mammoth	at	Steese	082286			250	207	19.5	10.9
Mammoth	at	Steese	082386			310	295	25.3	20.2
Mammoth	at	Steese	082486			310	314	25.1	21.3
Mammoth	at	Steese	082586			320	289	24.2	18.9
Mammoth	at	Steese	082686			400	348	23.2	21.8
Mammoth	at	Steese	082786			380	308	22.7	18.9
Mammoth	at	Steese	082886			340	262	26.4	18.7
Mammoth	at	Steese	082986			450	457	54.0	66.6
Mammoth	at	Steese	083086			500	4360	53.0	624
Mammoth	at	Steese	083186			230	1160	41.1	129
Mammoth	at	Steese	090186			260	641	34.9	60.4
Mammoth	at	Steese	090286			280	551	29.0	43.2
Mammoth	at	Steese	090386			190	439	29.5	35.0
Mammoth	at	Steese	090486			160	372	23.1	23.2
Mammoth	at	Steese	090586			310	695	22.0	41.4
Mammoth	at	Steese	090686			400	563	21.0	32.0
Mammoth	at	Steese	090786			650	795	21.6	46.3
Mammoth	at	Steese	090886			550	591	24.4	38.9
Mammoth	at	Steese	090886	1600		270	296		
Mammoth	at	Steese	090886			240	241		
Mammoth	at	Steese	090986			550	955	26.0	67.0

Appendix 1. Data from automatic samplers in Birch Creek drainage.							
Location		date	time	turbidity	TSS	discharge	sed. load
				(NTU)	(mg/L)	(cfs)	(tons/day)
Mammoth at Steese		091086		340		25.3	31.7
Mammoth at Steese		091086	1035	270	465		
Mammoth at Steese		091186		550	989	26.3	70.3
Mammoth at Steese		091286		700	825	26.5	59.0
Mammoth at Steese		091386		600	891	20.6	49.6
Mammoth at Steese		091486		650	580	21.0	32.9
Mammoth at Steese		091586		400	796	25.0	53.7
Mammoth at Steese		091686		160	205	29.5	16.3
Mammoth at Steese		091786		85	131	32.0	11.3
Mammoth at Steese		091886		110	164	33.4	14.8
Mammoth at Steese		091986		330	753	35.5	72.2
Mammoth at Steese		092086		350	802	36.4	78.9
Mammoth at Steese		092186		550	934	29.8	75.3
Mammoth at Steese		092286		650	1090	29.8	87.6
Mammoth at Steese		092386		750	1630	27.6	121
Mammoth at Steese		092486		1300	3360	26.5	240
Mammoth at Steese		092586	1650	2300	4070	22.1	243

Appendix 2. Data from non-automated monitoring sites,
 Birch Creek drainage.

Location			Date	Time	Turbidity (NTU)	Discharge (cfs)
Birch	ab	CC	062586	1215	50	
Birch	ab	CC	070986	1300	4.6	
Birch	ab	CC	082186	1455	2.3	
Birch	ab	CC	090986	1640	4.5	
Birch	ab	CC	092586	1420	50	
Albert	at	Steese	060686	1335	1.3	21.7
Albert	at	Steese	061786	1650	2.6	42.7
Albert	at	Steese	062386	1647	65	336
Albert	at	Steese	062486	1215	50	237
Albert	at	Steese	062486	1735		213
Albert	at	Steese	062586	0945	5.2	168
Albert	at	Steese	070886	1720	1.5	9.07
Albert	at	Steese	070986	1035	16	47.7
Albert	at	Steese	070986	1625	110	112
Albert	at	Steese	071086	0910	24	154
Albert	at	Steese	072386	1855	2.0	14.6
Albert	at	Steese	072886	1955	0.7	22.4
Albert	at	Steese	073186	0847	0.7	9.07
Albert	at	Steese	080186	0850	0.6	7.19
Albert	at	Steese	082086	1644		no flow
Albert	at	Steese	090886	1715	1.3	17.4
Albert	at	Steese	090986	0910	25	52.9
Albert	at	Steese	091086	0940	6.2	47.7
Albert	at	Steese	092586	1500	1.7	10.3
Bedrock	at	cg	052386	1330	1.1	ice
Bedrock	at	cg	060586	1820	2.3	16.4
Bedrock	at	cg	060686	1408	3.1	8.75
Bedrock	at	cg	061686	1818	2.4	2.10
Bedrock	at	cg	061886	1300	0.6	1.89
Bedrock	at	cg	062386	1630	1.8	22.3
Bedrock	at	cg	062586	1355	0.9	7.77
Bedrock	at	cg	070886	1520	1.5	2.21
Bedrock	at	cg	070986	0935	7.1	45.5
Bedrock	at	cg	070986	1740	8.3	63.8
Bedrock	at	cg	071086	1040	2.3	33.8
Bedrock	at	cg	072386	1915	0.5	3.58
Bedrock	at	cg	072886	1755	0.5	6.33
Bedrock	at	cg	073186	0936	0.5	3.42
Bedrock	at	cg	080186	0921	0.3	2.83
Bedrock	at	cg	082086	1530	1.0	0.72
Bedrock	at	cg	082186	1630	1.0	0.87
Bedrock	at	cg	090886	1650	0.4	4.11
Bedrock	at	cg	091086	1025	2.1	6.33

Appendix 2. Data	Location	from date	non-automated time	sites. turbidity (NTU)	discharge (cfs)
Bedrock	at cg	092586	1210	1.1	2.97
Crooked	at Cen	052386	1430	55	114
Crooked	at Cen	060586	1933	65	186
Crooked	at Cen	060686	0955	220	249
Crooked	at Cen	060686	1345		221
Crooked	at Cen	061686	1910	80	83.6
Crooked	at Cen	061786	0830	37	54.0
Crooked	at Cen	061786	1810		61.0
Crooked	at Cen	061886	0920	100	57.2
Crooked	at Cen	062386	1640	190	514
Crooked	at Cen	062486	1025	190	536
Crooked	at Cen	062486	1740		433
Crooked	at Cen	062586	0935	55	293
Crooked	at Cen	070886	1710	230	61.0
Crooked	at Cen	070986	1025	130	325
Crooked	at Cen	070986	1704	160	433
Crooked	at Cen	071086	0900	140	270
Crooked	at Cen	072386	1903	300	85.2
Crooked	at Cen	072886	1810	27	119
Crooked	at Cen	072986	0858	70	101
Crooked	at Cen	073086	0850	150	85.2
Crooked	at Cen	073186	0855	150	63.6
Crooked	at Cen	080186	0855	70	63.6
Crooked	at Cen	080386	1500		46.6
Crooked	at Cen	082086	1655	95	17.2
Crooked	at Cen	082186	1546	120	21.3
Crooked	at Cen	090886	1705	150	50.0
Crooked	at Cen	090986	1725	220	80.6
Crooked	at Cen	091086	0950	140	85.2
Crooked	at Cen	092586	1510	650	44.5
Deadwood	at CHSR	052386	1410	180	169
Deadwood	at CHSR	060586	1940	110	44.0
Deadwood	at CHSR	060686	0945	40	38.7
Deadwood	at CHSR	061686	1900	9.0	11.9
Deadwood	at CHSR	061786	1840	14	9.69
Deadwood	at CHSR	061886	0930	7.8	7.81
Deadwood	at CHSR	062386	1700	70	60.8
Deadwood	at CHSR	062486	1000	27	71.5
Deadwood	at CHSR	062586	0930	25	37.5
Deadwood	at CHSR	070886	1700	3.6	6.96
Deadwood	at CHSR	070986	1010	6.8	10.7
Deadwood	at CHSR	070986	1815	80	12.4
Deadwood	at CHSR	071086	0950	14	24.6
Deadwood	at CHSR	072386	1622	100	20.2
Deadwood	at CHSR	072886	1815	20	23.6

Appendix	2.	Data	from	non-automated	sites.	
Location			date	time	turbidity	discharge
					(NTU)	(cfs)
Deadwood	at	CHSR	072986	0850	70	20.2
Deadwood	at	CHSR	073086	0840	80	13.0
Deadwood	at	CHSR	073186	0836	110	19.4
Deadwood	at	CHSR	080186	0838	90	9.69
Deadwood	at	CHSR	080386	1455	8.8	3.90
Deadwood	at	CHSR	082086	1740	31	2.89
Deadwood	at	CHSR	082186	1600	24	3.90
Deadwood	at	CHSR	090886	1750	21	3.90
Deadwood	at	CHSR	090986	1745	55	8.72
Deadwood	at	CHSR	091086	1005	95	7.38
Deadwood	at	CHSR	092586	1530	390	6.96
Xetchem	at	CHSR	052386	1400	160	3.90
Xetchem	at	CHSR	060586	1947	160	8.14
Xetchem	at	CHSR	060686	0940	120	12.0
Xetchem	at	CHSR	061686	1855	140	0.95
Xetchem	at	CHSR	061786	1835	80	1.32
Xetchem	at	CHSR	061886	0955	140	0.51
Xetchem	at	CHSR	062386	1705	90	46.8
Xetchem	at	CHSR	062486	0955	100	36.6
Xetchem	at	CHSR	062586	0920	130	21.1
Xetchem	at	CHSR	070886	1655	160	2.25
Xetchem	at	CHSR	070986	1005	140	3.41
Xetchem	at	CHSR	070986	1810	130	4.43
Xetchem	at	CHSR	071086	0930	90	3.41
Xetchem	at	CHSR	072386	1615	95	4.43
Xetchem	at	CHSR	072886	1820	110	8.62
Xetchem	at	CHSR	072986	0845	100	9.12
Xetchem	at	CHSR	073086	0830	150	5.70
Xetchem	at	CHSR	073186	0830	130	4.43
Xetchem	at	CHSR	080186	0830	170	2.98
Xetchem	at	CHSR	080386	1450		1.32
Xetchem	at	CHSR	082086	1730	200	0.88
Xetchem	at	CHSR	082186	1555	200	1.32
Xetchem	at	CHSR	090886	1730	1000	1.22
Xetchem	at	CHSR	090986	1740	1200	3.90
Xetchem	at	CHSR	091086	1000	800	2.98
Xetchem	at	CHSR	092586	1525	160	2.25
Porcupine	ab	mth	052386	1320	55	40.0
Porcupine	ab	mth	060586	1740	65	79.0
Porcupine	ab	mth	061886	1310	28	24.2
Porcupine	ab	mth	062586	1405	50	82.0
Porcupine	ab	mth	070886	1425	26	12.6
Porcupine	ab	mth	070986	0920	190	22.9
Porcupine	ab	mth	070986	1725	70	44.0
Porcupine	ab	mth	071086	1052	90	38.1

Appendix 2. Location	Data	from date	non-automated time	sites. turbidity (NTU)	discharge (cfs)	
Porcupine	ab	mth	072386	1930	500	19.0
Porcupine	ab	mth	072886	1710	14	51.5
Porcupine	ab	mth	073086	1435	12	21.5
Porcupine	ab	mth	073186		65	4.15
Porcupine	ab	mth	080186	1205	100	17.8
Porcupine	ab	mth	082086	1500	5.6	7.49
Porcupine	ab	mth	082186	1645	13	9.66
Porcupine	ab	mth	090886	1635	60	16.2
Porcupine	ab	mth	091086	1115	120	45.0
Porcupine	ab	mth	092586	1715	1400	20.9

Appendix 3. Settleable solids data from all sources.

Location			date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Birch	ab	12mile	060586	1630	310		1.1
Birch	ab	12mile	061686	1448	160	211	tr
Birch	ab	12mile	062586	1520	200	390	0.22
Birch	ab	12mile	070886	1250	240	137	tr
Birch	ab	12mile	072386	1250	40	38.2	tr
Birch	ab	12mile	082086	1245	290	214	tr
Birch	ab	12mile	091086	1215	330	291	tr
Birch	ab	12mile	092586	1800	60	145	0.05
Birch	ab	CC	062586	1215	50		0.4
Birch	ab	CC	070986	1300	4.6		nd
Birch	ab	CC	082186	1455	2.3		nd
Birch	ab	CC	090986	1640	4.5		nd
Birch	at	bridge	052386	1500	14		nd
Birch	at	bridge	060386		90	264	0.55
Birch	at	bridge	060386		85	235	0.6
Birch	at	bridge	060686	1040	20		0.05
Birch	at	bridge	061786	1555	14		tr
Birch	at	bridge	062486	1300	130	1060	2.0
Birch	at	bridge	062586	1045	80	584	0.8
Birch	at	bridge	070986	1350	9.1	23	tr
Birch	at	bridge	072386	1710	23	272	tr
Birch	at	bridge	082186	1015	6.3	3.78	nd
Birch	at	bridge	090986	1115			nd
Birch	ab	clums f	062486	1500	95	311	0.35
Birch	ab	harriss	062486	1500	95	310	0.2
Birch	at	butte	062486	1300	350	889	0.7
Birch	at	harring	062486	1345	140	392	0.4
Butte	ab	mth	062486	1300	270	1570	2.0
Eagle	at	glddust	062486	1300	450	962	0.7
Gold Dust	ab	mth	062486	1300	140	472	0.4
Harrison	ab	mth	062486	1500	50	251	0.3
Indepndnce	a	GAM	072986	1255	0.8	3.44	nd
Indepndnce	a	GAM	073086	0915	0.9	12.6	tr
Indepndnce	a	GAM	073086	1258	0.4	0.85	tr

Appendix 3. Settleable solids data by site.

Location			date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Indepndnce	a	GAM	073186	0908	0.4	0.9	nd
Indepndnce	a	GAM	073186	1300	0.3	1.05	tr
Indepndnce	a	GAM	073186	1700	0.5	0.63	tr
Indepndnce	a	GAM	080186	0900	0.3	0.75	nd
Indepndnce	a	GAM	080186	1300	0.7	1.79	nd
Indepndnce	a	GAM	080386	1540	0.7	4.45	
Indepndnce	b	GAM	073086	0935	50	41	tr
Indepndnce	b	CAM	073086	1307,	37	32.1	tr
Indepndnce	b	GAM	073086	1713	370	469	tr
Indepndnce	b	GAM	073186	0916	65	46	tr
Indepndnce	b	GAM	073186	1307	70	71.7	tr
Indepndnce	b	GAM	073186	1709	420	480	tr
Indepndnce	b	GAM	080186	0907	90	66.1	tr
Indepndnce	b	may	073186	1105	55	89.1	tr
Indepndnce	b	may	073186	1346	33	29.3	tr
Indepndnce	b	may	073186	1745	55	70	tr
Indepndnce	b	may	080186	0945	37	27.3	tr
Indepndnce	b	may	080186	1345	900	1610	
Indepndnce	a	mth	072986	1548	3.7	5.94	tr
Indepndnce	a	mth	073086	1124	31	14.3	nd
Indepndnce	a	mth	073086	1502	380	397	0.1
Indepndnce	a	mth	073086	1a59	45	43.4	tr
Indepndnce	a	mth	073186	1102	130	160	0.08
Indepndnce	a	mth	073186	1502	20	20	nd
Indepndnce	a	mth	073186	1902	55	57.5	tr
Indepndnce	a	mth	080186	1100	33	29.6	tr
Indepndnce	a	mth	080186	1503	1000	1590	2.0
Mastodon	a	mth	072986	1548	2.1	5	tr
Mastodon	a	mth	073086	1127	2.1	4.69	tr
Mastodon	a	mth	073086	1500	2.7	5.11	nd
Mastodon	a	mth	073086	1903	2.7	2.25	nd
Mastodon	a	mth	073186	1104	2.1	2.46	nd
Mastodon	a	mth	073186	1525	2.4	2.08	tr
Mastodon	a	mth	073186	1903	2.2	4.39	tr
Mastodon	a	mth	080186	1102	2.4	4.16	nd
Mastodon	a	mth	080186	1504	2.1	2.08	tr
Mammoth	at	head	072986	1548	3.2	9.01	tr
Mammoth	at	head	073086	1125	14	1a.3	tr
Mammoth	at	head	073086	1459	210	245	tr
Mammoth	at	head	073086	1900	34	31.8	tr
Mammoth	at	head	073186	1102	80	124	tr
Mammoth	at	head	073186	1500	19	24.8	tr

Appendix 3. Settleable solids data by site.

Location				date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Mammoth	at	head		073186	1901	33	32.8	tr
Mammoth	at	head		080186	1100	25	20.6	tr
Mammoth	at	head		080186	1507	700	926	1.0
Mammoth	ab	1	eff	072986	1750	9.1	7.73	0.05
Mammoth	ab	1	eff	073086	1203	9.0	18	tr
Mammoth	ab	1	eff	073086	1538	150	194	0.05
Mammoth	ab	1	eff	073086	1945	10	10.2	tr
Mammoth	ab	1	eff	073186	1538	45	103	0.05
Mammoth	ab	1	eff	073186	1936	110	418	0.4
Mammoth	ab	1	eff	080186	1136	11	14	tr
Mammoth	ab	1	eff	080186	1520	310	57.6	.55
Loud	effluent			073086	1202	450	261	tr
Loud	effluent			073086	1534	500	171	tr
Loud	effluent			073086	1941	450	153	nd
Loud	effluent			073186	1130	330	102	tr
Loud	effluent			073186	1534	310	81.9	nd
Loud	effluent			073186	1932	260	63.8	tr
Loud	effluent			080186	1139	190	52.9	tr
Loud	effluent			080186	1523	190	52.2	tr
AV	diversion			072986	1548	13	14.7	tr
AV	diversion			073086	1208	9.5	7.06	tr
AV	diversion			073086	1537	170	151	tr
AV	diversion			073086	1945	17	12.4	tr
AV	diversion			073186	1135	35	40.1	tr
AV	diversion			073186	1538	36	72.5	0.05
AV	diversion			073186	1936	37	91.6	0.05
AV	diversion			080186	1141	16	15.8	tr
AV	diversion			080186	1520	290	556	0.6
Mammoth	b	AV	div	073086	1208	26	24.1	tr
Mammoth	b	AV	div	073086	1534	120	142	tr
Mammoth	b	AV	div	073086	1943	23	21	tr
Mammoth	b	AV	div	073186	1132	38	46.5	tr
Mammoth	b	AV	div	073186	1536	40	116	0.05
Mammoth	b	AV	div	073186	1932	26	57.1	0.05
Mammoth	b	AV	div	080186	1136	21	18.1	tr
Mammoth	b	AV	div	080186	1518	280	498	0.5
AV	eff	ab	rd	073086	1300	2500	8640	13
AV	eff	ab	rd	073086	1800	3800	14100	27
AV	eff	ab	rd	073186	0900			4.2
AV	eff	ab	rd	073186	1220	7380	18500	49
AV	eff	ab	rd	073186	1620	3590	9680	28
AV	eff	ab	rd	080186	1230	6980	19500	41

Appendix 3. Settleable solids data by site.

Location				date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Miller	ab	rd		073086	1230	0.6	2.7	nd
Miller	ab	rd		073086	1800	0.5	1.21	nd
Miller	ab	rd		073186	0855	0.4	0.86	tr
Miller	ab	rd		073186	1620	0.5	0.32	nd
Miller	ab	rd		080186	0850	0.6	0.36	nd
Miller	ab	rd		080186	1230	0.5	0.45	nd
Miller #2				062486		39	148	0.05
AV	eff	b	pond	073086	0940	450	337	0.05
AV	eff	b	pond	073086	1330	500	386	tr
AV	eff	b	pond	073086	1805	600	526	tr
AV	eff	b	pond	073186	0915	360	276	tr
AV	eff	b	pond	073186	1245	420	334	tr
AV	eff	b	pond	073186	1630	550	477	tr
AV	eff	b	pond	080186	0912	290	212	tr
AV	eff	b	pond	080186	1255	260	215	tr
AV	eff	a	Mammoth	073086	1030	430	309	tr
AV	eff	a	Mammoth	073086	1350	500	375	0.05
AV	eff	a	Mammoth	073086	1825	550	430	tr
AV	eff	a	Mammoth	073186	0945	350	235	tr
AV	eff	a	Mammoth	073186	1320	390	277	tr
AV	eff	a	Mammoth	073186	1705	390	287	tr
AV	eff	a	Mammoth	080186	0935	230	163	tr
Mammoth	ab	AVeff		073086	1045	85	48.5	tr
Mammoth	ab	AVeff		073086	1350	70	36.8	tr
Mammoth	ab	AVeff		073086	1825	150	108	tr
Mammoth	ab	AVeff		073186	0945	75	40.1	tr
Mammoth	ab	AVeff		073186	1310	70	46.5	tr
Mammoth	ab	AVeff		073186	1705	50	38.9	tr
Mammoth	ab	AVeff		080186	1005	55	27.3	tr
Mammoth	ab	AVeff		080186	1315	45	24.6	tr
Mammoth	b	AV	eff	073086	1115	300	197	tr
Mammoth	b	AV	eff	073086	1400	330	220	tr
Mammoth	b	AV	eff	073086	1830	410	296	tr
Mammoth	b	AV	eff	073186	0950	240	152	tr
Mammoth	b	AV	eff	073186	1340	230	170	tr
Mammoth	b	AV	eff	073186	1700	250	203	tr
Mammoth	b	AV	eff	080186	0940	140	112	tr
Mammoth	b	AV	eff	080186	1325	140	112	tr
dugas	b	sluice		073086	0950	950	3900	3.5
dugas	b	sluice		073086	1330	18900	36400	82

Appendix 3. Settleable solids data by site.

Location			date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
dugas	b	sluice	073086	1805	14600	34000	97
dugas	b	sluice	073186	0910	17100	33600	92
dugas	b	sluice	073186	1245	17900	35400	98
dugas	b	sluice	073186	1635	16800	33000	120
dugas	b	sluice	080186	0915	12900	27000	69
dugas	b	sluice	080186	1355	13100	37500	80
Dugas	eff	ab mam	073086	1350	550	319	tr
Dugas	eff	ab mam	073086	1805	600	422	tr
Dugas	eff	ab mam	073186	1025	550	308	tr
Dugas	eff	ab mam	073186	1400	650	458	tr
Dugas	eff	ab mam	080186	1005	550	247	tr
Dugas	eff	ab mam	080186	1400	400	256	tr
Mammoth	ab	Dugas	073086	1335	210	136	tr
Mammoth	ab	Dugas	073086	1805	290	273	0.05
Mammoth	ab	Dugas	073186	1800	220	177	tr
Mammoth	at	Steese	052386	1135	40		0.1
Mammoth	at	Steese	060386		200		1.1
Mammoth	at	Steese	060386		250	777	1.0
Mammoth	at	Steese	060586	1750	950	3180	3.5
Mammoth	at	Steese	061686	1730	180	207	0.1
Mammoth	at	Steese	062386	1305	150	620	0.8
Mammoth	at	Steese	062586	1400	70		0.05
Mammoth	at	Steese	070886	1445	180	89	tr
Mammoth	at	Steese	070986	0930	140		tr
Mammoth	at	Steese	070986	1730	150		0.1
Mammoth	at	Steese	071086	1045	110		0.2
Mammoth	at	Steese	072386	1420	250	196	tr
Mammoth	at	Steese	073086	1430	300	204	tr
Mammoth	at	Steese	073086	1830	310	213	tr
Mammoth	at	Steese	073186	1030	240	152	tr
Mammoth	at	Steese	073186	1430	240	162	tr
Mammoth	at	Steese	073186	2230	240	235	tr
Mammoth	at	Steese	080186	0230	240	166	tr
Mammoth	at	Steese	080186	0630	210	149	tr
Mammoth	at	Steese	080186	1030	170	118	tr
Mammoth	at	Steese	082086	1430	180	143	tr
Mammoth	at	Steese	090886	1600	240	241	tr
Mammoth	at	Steese	091086	1035	270		0.05
Mammoth	at	Steese	092586	1650	2300	4070	6.7
Mammoth	#3		062486	1438	38	208	0.1
Mammoth	#5		062486	1438	40	134	0.1

Appendix 3. Settleable solids data by site.

Location			date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Porcupine	ab	mth	052386	1320	55		0.1
Porcupine	ab	mth	060386		70	191	0.3
Porcupine	ab	mth	060386		80	206	0.4
Porcupine	ab	mth	060586	1740	65		0.3
Porcupine	ab	mth	060686	1540	120		0.3
Porcupine	ab	mth	061786	0830	70	134	tr
Porcupine	ab	mth	062586	1405	50		
Porcupine	ab	mth	070886	1425	26		nd
Porcupine	ab	mth	070986	0920'	190		tr
Porcupine	ab	mth	070986	1725	70		0.1
Porcupine	ab	mth	071086	1052	90		tr
Porcupine	ab	mth	072386	1930	500		0.10
Porcupine	ab	mth	082086	1500	5.6		nd
Porcupine	ab	mth	082186	1645	13		tr
Porcupine	ab	mth	090886	1635	60		tr
Porcupine	ab	mth	091086	1115	120		0.5
Porcupine	ab	mth	092586	1715	1400		0.1
Bedrock	at	cg	060386		0.6	3.6	nd
Bedrock	at	cg	060386		1.5	0.8	nd
Bedrock	at	cg	052386	1330	1.1		nd
Bedrock	at	cg	060586	1820	2.3		tr
Bedrock	at	cg	061686	1818	2.4		nd
Bedrock	at	cg	061886	1300	0.6		nd
Bedrock	at	cg	070886	1520	1.5		nd
Bedrock	at	cg	070986	0935	7.1		tr
Bedrock	at	cg	070986	1740	8.3		.05
Bedrock	at	cg	071086	1040	2.3		tr
Bedrock	at	cg	072386	1915	0.5		nd
Bedrock	at	cg	082086	1530	1.0		nd
Bedrock	at	cg	082186	1630	1.0		tr
Bedrock	at	cg	090886	1650	0.4		nd
Bedrock	at	cg	091086	1025	2.1		nd
Boulder	at	gage	060386		3.6	11.2	nd
Boulder	at	gage	060386		3.6	9.9	nd
Boulder	at	gage	060586	1927	3.4		tr
Boulder	at	gage	062486	1755	3.3	13.2	tr
Boulder	at	gage	070886	1555	0.7	1.95	nd
Boulder	at	gage	070986	0950	4.9		nd
Boulder	at	gage	070986	1750	16		0.15
Boulder	at	gage	071086	1030	2.3		tr
Boulder	at	gage	072386	1530	1.4	5.44	tr
Boulder	at	gage	082086	1600	0.6	0.81	nd
Boulder	at	gage	090986	1820	1.0	1.28	nd
Crooked	at	Cen	052386	1430	55		nd

Appendix 3. Settleable solids data by site.

Location			date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Crooked	at	Cen	060386		85	151	0.2
Crooked	at	Cen	060386		110	165	0.1
Crooked	at	Cen	060586	1933	65		tr
Crooked	at	Cen	060686	0955	220		0.45
Crooked	at	Cen	061686	1910	80		tr
Crooked	at	Cen	061786	0830	37		tr
Crooked	at	Cen	061886	0920	100		tr
Crooked	at	Cen	062386	1640	190		1.5
Crooked	at	Cen	062486	1025	190		1.3
Crooked	at	Cen	062586	0935	55		0.3
Crooked	at	Cen	070886	1710	230		tr
Crooked	at	Can	070986	1025	130		0.3
Crooked	at	Cen	070986	1704	160		0.4
Crooked	at	Cen	071086	0900	140		0.15
Crooked	at	Cen	072386	1903	300		tr
Crooked	at	Cen	082086	1655	95		nd
Crooked	at	Cen	082186	1546	120		tr
Crooked	at	Can	090886	1705	150		tr
Crooked	at	Cen	090986	1725	220		0.1
Crooked	at	Cen	091086	0950	140		0.05
Crooked	at	Cen	092586	1510	650		0.05
Deadwood	at	CHSR	052386	1410	180		0.8
Deadwood	at	CHSR	060386		65	190	0.6
Deadwood	at	CHSR	060386		60	391	0.65
Deadwood	at	CHSR	060586	1940	110		0.5
Deadwood	at	CHSR	060686	0945	40		0.15
Deadwood	at	CHSR	061686	1900	9.0		tr
Deadwood	at	CHSR	061786	1840	14		tr
Deadwood	at	CHSR	062386	1700	70		0.4
Deadwood	at	CHSR	062486	1000	27		0.1
Deadwood	at	CHSR	062586	0930	25		0.1
Deadwood	at	CHSR	070886	1700	3.6		tr
Deadwood	at	CHSR	070986	1010	6.8		nd
Deadwood	at	CHSR	070986	1815	80		.05
Deadwood	at	CHSR	071086	0950	14		0.05
Deadwood	at	CHSR	072386	1622	100		tr
Deadwood	at	CHSR	082086	1740	31		tr
Deadwood	at	CHSR	082186	1600	24		nd
Deadwood	at	CHSR	090886	1750	21		nd
Deadwood	at	CHSR	090986	1745	55		tr
Deadwood	at	CHSR	091086	1005	95		tr
Deadwood	at	CHSR	092586	1530	390		tr
Deadwood	ab	mine	060386		60	301	0.75
Deadwood	ab	mine	060386		60	376	0.8

Appendix 3. Settleable solids data by site.

Location			date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Ketchem	a	CHSR	052386	1400	160		0.6
Ketchem	a	CHSR	060386		95	335	0.6
Ketchem	a	CHSR	060386		90	333	0.5
Ketchem	a	CHSR	060586	1947	160		0.1
Ketchem	a	CHSR	060686	0940	120		0.2
Ketchem	a	CHSR	061686	1855	140		tr
Ketchem	a	CHSR	061786	1835	80		nd
Ketchem	a	CHSR	061886	0955	140		nd
Ketchem	a	CHSR	062386	1705	90		0.3
Ketchem	a	CHSR	062486	0955	100		0.25
Ketchem	a	CHSR	062586	0920	130		0.2
Ketchem	a	CHSR	070886	1655	160		tr
Ketchem	a	CHSR	070986	1005	140		tr
Ketchem	a	CHSR	070986	1810	130		tr
Ketchem	a	CHSR	071086	0930	90		0.05
Ketchem	a	CHSR	072386	1615	95		tr
Ketchem	a	CHSR	082086	1730	200		tr
Ketchem	a	CHSR	082186	1555	200		tr
Ketchem	a	CHSR	090886	1730	1000		tr
Ketchem	a	CHSR	090986	1740	1200		tr
Ketchem	a	CHSR	091086	1000	800		tr
Ketchem	a	CHSR	092586	1525	160		tr
Portage	a	Mdcn Lk	062486	1000	65	119	tr
Albert	at	Steese	060686	1335	1.3		nd
Albert	at	Steese	061786	1650	2.6		nd
Albert	at	Steese	062386	1647	65		0.15
Albert	at	Steese	062486	1215	50		0.1
Albert	at	Steese	062586	0945	5.2		0.15
Albert	at	Steese	070886	1720	1.5		nd
Albert	at	Steese	070986	1035	16		tr
Albert	at	Steese	070986	1625	110		0.5
Albert	at	Steese	071086	0910	24		0.3
Albert	at	Steese	072386	1855	2.0		nd
Albert	at	Steese	090886	1715	1.3		tr
Albert	at	Steese	090986	0910	25		0.1
Albert	at	Steese	091086	0940	6.2		tr
Crooked	ab	mouth	052386	1650	25		nd
Crooked	ab	mouth	060686	1250	75		tr
Crooked	ab	mouth	061786	1045	34		tr
Crooked	ab	mouth	062586	1135	120	590	0.65
Crooked	ab	mouth	070986	1100	36	87.5	0.1
Crooked	ab	mouth	072386	1800	65	80.6	tr
Crooked	ab	mouth	082186	1400	24	16.5	nd
Crooked	ab	mouth	090986	1310	120	255	tr

Appendix 3. Settleable solids data by site.

Location	date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Chena river 1	052086	1417	8.8	114	0.3
Chena river 2	052086	1510	5.7	17.5	0.05
Cripple creek	052086	1516	50	233	0.5
Little chena	052086	1415	14	64.9	0.2
Livengood creek	052086	1125	170	524	0.55
Tatalina river	052086	1205	1.4	3.6	tr
Tolovana river	052086	1145	1.9	9.8	tr
Tolovana river2	052086	1035	9.3	24.8	0.05
WF Tolovana r.	052086	1002	1.6	6	tr
First Chance	090586		7.3	6.8	tr
Flume a steese	090586		2.5	2.38	nd
Gilmore a trk st	090586		1100	722	tr
Gilmore creek	052086	1345	75	98.8	0.15
Goldstream a br	090586		180	129	0.05
Goldstream a gsr	090586		330	261	0.1
Goldstream a scr	090586		31	36.2	tr
Goldstream a she	090586		120	64	tr
Goldstream creek	052086	1350	210	524	1.1
Pedro a 1st chnc	090586		330	201	tr
Pedro a gld pan	090586		110	84	nd
Steamboat a. stee	090586		26	282	0.3
McManus Cr	060686		1.4	11.4	tr
Deep ab Dale	060686		1.7	2.63	nd

Appendix 3. Settleable solids data by site.

Location	date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Deep at Faith	060686		120	351	0.25
Deep lmi us	060686		100	613	0.8
Deep at fcr	060686		140	832	1.1
Faith a low rd	060686		18	88.6	0.05
Faith ab deep cr	060686		18	85.4	0.05
Faith b deep cr	060686		13	90.7	tr
Faith at rd cross	060286		40	151	0.25
Faith at rd cross	060286		35	147	0.1
Faith at Steese	052386	1930	110		1.0
Faith at Steese	060286		70	306	0.5
Faith at Steese	070886	1123	26		tr
Faith at Steese	072386	2031	60		0.05
Faith at Steese	082186	1940			2.75
Faith at Steese	090886	1210	5.6		tr
Faith at Steese	091086	1535			tr
Faith at Steese	092586	1925	22	11.7	tr
Chatanika a 39m	052086	1320	5.1	32	0.1
Chatanika a 39m	060686		14	11.4	tr
Chatanika a 55m	060686		10	42.2	tr

Appendix 4. Discharge data from automated sites, 1986.

Faith Creek above the Steese Highway
 Discharge in cubic feet per second
 Drainage area: 61.0
 Extremes: maximum = 1580 minimum = 30.9
 Average: 143

Day	June	July	August	September
1		59.8		165
2		51.1		159
3		58.2		159
4		49.8		154
5		44.5		144
6		45.2		133
7		39.6		
8		39.6		138
9		40.0		154
10		40.9		148
11		41.8		143
12		53.2		138
13		42.6		134
14		40.8		-127
15		39.4		124
16	97.3	36.0		124
17	85.7	35.4		125
18	87.5	58.9		170
19	118	76.2		164
20	86.4	358	50	166
21	91.9	253	750	194
22	132	152	662	170
23	123	193	352	157
24	304		273	146
25	136		242	136
26	93.3		215	
27	76.1		199	
28	67.0		208	
29	57.2		205	
30	53.5		192	
31			176	
Month Avg	107	80.4	294	149

Appendix 4. Discharge data from automated sites, 1986.

Mammoth Creek at the Steese Highway
 Discharge in cubic feet per second
 Drainage area: 41.5 mi²
 Extremes: maximum = 423 minimum = 9.19
 Average: 43.6

Day	May	June	July	August	September
1		95.2	118	25.5	34.9
2		107	91.0	24.6	29.0
3		94.5	60.9	24.7	29.5
4		81.7	44.1	23.8	23.1
5		94.2	38.9	20.7	22.0
6		108	35.3	20.4	21.0
7		85.9	30.8	19.7	21.6
8		87.9	62.1	18.9	24.4
9		110	70.6	19.2	26.0
10		83.1	50.5	18.4	25.3
11		58.4	41.6	18.1	26.3
12		130	44.5	16.4	26.5
13		91.1	39.0	14.8	20.6
14		55.9	33.9	16.5	21.0
15		36.8	32.6	12.3	25.0
16		24.2	29.3	10.5	29.5
17		15.9	27.3	11.9	32.0
18		15.9	23.9	11.7	33.4
19		94.4	22.6	10.4	35.5
20		134	29.6	10.9	36.4
21		135	47.8	14.2	29.8
22		97.5	43.8	19.5	29.8
23	39.9	142	37.9	25.3	27.6
24	31.4	156	31.1	25.1	26.5
25	35.8	93.8	29.3	24.2	22.1
26	39.8	62.4	32.7	23.2	
27	37.0	52.8	38.5	22.7	
28	29.0	45.0	39.3	26.4	
29	28.7	36.1	35.0	54.0	
30	43.6	36.1	31.0	53.0	
31	69.8		28.9	41.1	
Month Avg	39.4	82.1	42.7	21.9	27.2

Appendix 4. Discharge data from automated sites, 1986.

Birch Creek above Twelvemile Creek
 Discharge in cubic feet per second
 Drainage area: 85.4 mi²
 Extremes: maximum = 645 minimum = 24.3
 Average : 118

Day	June	July	August	September
1		161	110	102
2		135	104	94.8
3		113	89.2	87.1
4		110	78.1	76.1
5	208	98.7	71.5	70.6
6	164	81.2	65.4	65.6
7	150	70.1	58.0	59.8
8	130	63.1	53.8	64.2
9	176	72.9	50.1	98.3
10	229	70.8	43.0	91.5
11	211	90.3	42.9	86.0
12	436	141	38.6	78.5
13	269	115	36.7	72.6
14	143	102	35.2	63.2
15	95.8	86.4	31.9	63.0
16	55.0	74.0	31.9	65.5
17	43.7	67.0	31.5	68.4
18	59.7	62.9	30.7	98.0
19	354	69.8	28.7	80.0
20	286	255	30.9	81.6
21	290	251	74.0	77.6
22	286	216	130	72.8
23	460	142	111	66.8
24	440	118	95.9	60.7
25	245	106	82.3	67.5
26	177	136	75.5	
27	145	235	72.1	
28	126	235	125	
29	106	148	142	
30	101	122	123	
31		112	114	
Month Avg	207	125	71.2	76.5

Appendix 4. Discharge data from automated sites, 1986.

Crooked Creek above mouth

Discharge in cubic ~~feet~~ per second

Drainage area: 510 mi²

Extremes: maximum = 2200 minimum = 71.5

Average: 561 does not include flows observed in August and September

Day	June	July	August	September
1		726		
2		504		
3		390		
4		343		
5		289		
6		236		
7		200		
8		239		
9		467		114
10		600		
11		755		
12		632		
13		503		
14		413		
15		343		
16	279	295		
17	235	237		
18	635	196		
19	1590	242		
20	1290	1220		
21	899	769	71.7	
22	895	495		
23	1860	336		
24	1380	251		
25	793	209		115
26	578	472		
27	462	660		
28	384	479		
29	332	339		
30	523	255		
31				
Month Avg	809	436		

Appendix 4. Discharge data from automated sites, 1986.

Birch Creek above Bridge

Discharge in cubic ~~feet~~ per second

Drainage area: 2150 ~~mi~~²

Extremes: maximum = 11100 minimum = 700

Average: 3125 does not include flows observed in August and September

Day	June	July	August	September
1		1810		
2		4640		
3		2390		
4		1580		
5		1280		
6	1880	1060		
7	1870	904		
8	1640	809		
9	1500	785		804
10	1440	1040		
11	2460	1570		
12	3640	6830		
13	5120	6190		
14	3600	5740		
15	2220	2490		
16	1570	1130		
17	1220	1670		
18	1000	1780		
19	1720	1890		
20	9030	1840		
21	8860		700	
22	5270			
23	5080			
24	10700			
25	11100			853
26	4830			
27	2800			
28	1940			
29	1490			
30	1220			
31				
Month Avg	3730	2370		

Appendix 5. Data from Mammoth Creek intensive study
July 29-August 3, 1986

Location		loc	no.	date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Indepndnce	a	GAM	1	072986	1255	0.8	3.44	nd
Indepndnce	a	GAM	1	072986	1843	0.8	3.55	
Indepndnce	a	GAM	1	073086	0915	0.9	12.6	tr
Indepndnce	a	GAM	1	073086	1258	0.4	0.85	tr
Indepndnce	a	GAM	1	073086	1700	0.4	0.86	nd
Indepndnce	a	GAM	1	073186	0908	0.4	0.9	nd
Indepndnce	a	GAM	1	073186	1300	0.3	1.05	tr
Indepndnce	a	GAM	1	073186	1700	0.5	0.63	tr
Indepndnce	a	GAM	1	080186	0900	0.3	0.75	nd
Indepndnce	a	GAM	1	080186	1300	0.7	1.79	nd
Indepndnce	a	GAM	1	080386	1540	0.7	4.45	
Indepndnce	b	GAM	2	072986	1340	20	65	
Indepndnce	b	GAM	2	072986	1850	420	696	
Indepndnce	b	GAM	2	073086	0935	50	41	tr
Indepndnce	b	GAM	2	073086	1307	37	32.1	tr
Indepndnce	b	GAM	2	073086	1713	370	469	tr
Indepndnce	b	GAM	2	073186	0916	65	46	tr
Indepndnce	b	GAM	2	073186	1307	70	71.7	tr
Indepndnce	b	GAM	2	073186	1709	400	480	tr
Indepndnce	b	GAM	2	080186	0907	90	66.1	tr
Indepndnce	b	GAM	2	080186	1308	110	74.1	
Indepndnce	b	GAM	2	080386	1600	17	10.5	
Indepndnce	b	may	3	073186	1105	55	89.1	tr
Indepndnce	b	may	3	073186	1346	33	29.3	tr
Indepndnce	b	may	3	073186	1745	55	70	tr
Indepndnce	b	may	3	080186	0945	37	27.3	tr
Indepndnce	b	may	3	080186	1345	900	1610	
Indepndnce	b	may	3	080386	1850	600	421	
Indepndnce	a	mth	4	072986	1548	3.7	5.94	tr
Indepndnce	a	mth	4	073086	1124	31	14.3	nd
Indepndnce	a	mth	4	073086	1502	380	397	0.1
Indepndnce	a	mth	4	073086	1859	40	43.4	0.02
Indepndnce	a	mth	4	073186	1102	130	160	0.08
Indepndnce	a	mth	4	073186	1502	20	20	nd
Indepndnce	a	mth	4	073186	1902	55	57.5	tr
Indepndnce	a	mth	4	080186	1100	33	29.6	tr
Indepndnce	a	mth	4	080186	1420	800	2020	
Indepndnce	a	mth	4	080186	1500	1000	1640	
Indepndnce	a	mth	4	080186	1503	1000	1590	2.0
Indepndnce	a	mth	4	080186	1900	300	281	
Indepndnce	a	mth	4	080186	2300	300	235	
Indepndnce	a	mth	4	080286	0300	160	131	

Appendix Location	5.	Mammoth loc	Creek no.	intensive date	study time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Indepndnce	a	mth	4	080286	0700	95	77.5	
Indepndnce	a	mth	4	080286	1100	70	72.7	
Indepndnce	a	mth	4	080286	1500	350	252	
Indepndnce	a	mth	4	080286	1900	750	451	
Indepndnce	a	mth	4	080286	2300	450	292	
Indepndnce	a	mth	4	080386	0300	650	263	
Indepndnce	a	mth	4	080386	0700	800	599	
Indepndnce	a	mth	4	080386	1100	1000	731	
Indepndnce	a	mth	4	080386	1500	1300	924	
Indepndnce	a	mth	4	080386	1640	1000	688	3.1
Mastodon	a	mth	5	072986	1548	2.1	5	tr
Mastodon	a	mth	5	073086	1127	2.1	4.69	tr
Mastodon	a	mth	5	073086	1500	2.7	5.11	nd
Mastodon	a	mth	5	073086	1903	2.7	2.25	nd
Mastodon	a	mth	5	073186	1104	2.1	2.46	nd
Mastodon	a	mth	5	073186	1525	2.4	2.08	tr
Mastodon	a	mth	5	073186	1903	2.2	4.39	tr
Mastodon	a	mth	5	080186	1102	2.4	4.16	nd
Mastodon	a	mth	5	080186	1504	2.1	2.08	tr
Mastodon	a	mth	5	080386	1640	1.6	2.27	
Mammoth	at	head	6	072986	1548	3.2	9.01	tr
Mammoth	at	head	6	073086	1125	14	18.3	tr
Mammoth	at	head	6	073086	1459	201	245	tr
Mammoth	at	head	6	073086	1900	34	31.8	tr
Mammoth	at	head	6	073186	1102	80	124	tr
Mammoth	at	head	6	073186	1500	19	24.8	tr
Mammoth	at	head	6	073186	1901	33	32.8	tr
Mammoth	at	head	6	080186	1100	25	20.6	tr
Mammoth	at	head	6	080186	1507	700	926	1.0
Mammoth	at	head	6	080386	1640	340	241	
Mammoth	at	head <i>i</i> *	6	073086	0330	25	27.9	
Mammoth	at	head <i>i</i>	6	073086	1530	450	480	
Mammoth	at	head <i>i</i>	6	073086	1900	26	28.3	tr
Mammoth	at	head <i>i</i>	6	073086	2300	85	127	tr
Mammoth	at	head <i>i</i>	6	073186	0300	140	143	tr
Mammoth	at	head <i>i</i>	6	073186	0700	15	13	tr
Mammoth	at	head <i>i</i>	6	073186	1100	65	82.5	tr
Mammoth	at	head <i>i</i>	6	073186	1500	8.5	7.54	tr
Mammoth	at	head <i>i</i>	6	073186	1900	23	28.2	tr
Mammoth	at	head <i>i</i>	6	073186	2300	36	40	tr
Mammoth	at	head <i>i</i>	6	080186	0300	75	55.2	tr
Mammoth	at	head <i>i</i>	6	080186	0700	20	12.5	tr

* 'i' indicates samples collected in automated sampler.

Appendix 5. Mammoth Creek intensive study								
Location		loc	no.	date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Mammoth	ab	1	eff	7	072986	1750	9.1	7.73
Mammoth	ab	1	eff	7	073086	1203	9.0	18
Mammoth	ab	1	eff	7	073086	1538	150	194
Mammoth	ab	1	eff	7	073086	1945	10	10.2
Mammoth	ab	1	eff	7	073186	1135	30	67.5
Mammoth	ab	1	eff	7	073186	1538	45	103
Mammoth	ab	1	eff	7	073186	1936	110	418
Mammoth	ab	1	eff	7	080186	1136	11	14
Mammoth	ab	1	eff	7	080186	1520	310	57.6
Mammoth	ab	1	eff	7	080386	1530	550	433
Loud	effluent			8	072986	1615	1100	736
Loud	effluent			8	073086	1202	450	261
Loud	effluent			8	073086	1534	500	171
Loud	effluent			8	073086	1941	450	153
Loud	effluent			8	073186	1130	330	102
Loud	effluent			8	073186	1534	310	81.9
Loud	effluent			8	073186	1932	260	63.8
Loud	effluent			8	080186	1139	190	52.9
Loud	effluent			8	080186	1523	190	52.2
Loud	effluent			8	080386	1530	500	279
AV	diversion			9	072986	1548	13	14.7
AV	diversion			9	073086	1208	9.5	7.06
AV	diversion			9	073086	1537	170	151
AV	diversion			9	073086	1945	17	12.4
AV	diversion			9	073186	1135	35	40.1
AV	diversion			9	073186	1538	36	72.5
AV	diversion			9	073186	1936	37	91.6
AV	diversion			9	080186	1141	16	15.8
AV	diversion			9	080186	1520	290	556
Mammoth	b	AV	div	10	072986	1610	95	88.2
Mammoth	b	AV	div	10	073086	1208	26	24.1
Mammoth	b	AV	div	10	073086	1534	120	142
Mammoth	b	AV	div	10	073086	1943	23	21
Mammoth	b	AV	div	10	073186	1132	38	46.5
Mammoth	b	AV	div	10	073186	1536	40	116
Mammoth	b	AV	div	10	073186	1932	27	57.1
Mammoth	b	AV	div	10	080186	1136	21	18.1
Mammoth	b	AV	div	10	080186	1518	280	498
Mammoth	b	AV	divi*	10	072986	2030	85	85.7
Mammoth	b	AV	divi	10	073086	0430	37	30.3
Mammoth	b	AV	divi	10	073086	1030	32	31.4
Mammoth	b	AV	divi	10	073086	1630	150	191

* 'i' indicates samples collected by automated sampler

Appendix 5. Location			Mammoth	Creek	intensive	study	TSS	set. solids	
			loc	no.	date	time	turbidity (NTU)	(mg/L)	(ml/L)
Mammoth	b	AVdivi	10	073086	1930	31	32.9		
Mammoth	b	AVdivi	10	073086	2330	3 8	40		
Mammoth	b	AVdivi	10	073186	0330	75	80.4		
Mammoth	b	AVdivi	10	073186	0730	24	27		
Mammoth	b	AVdivi	10	073186	1130	36	50.2		
Mammoth	b	AVdivi	10	073186	1530	39	95.7		
Mammoth	b	AVdivi	10	073186	1930	80	265	tr	
Mammoth	b	AVdivi	10	073186	2330	37	49.8	tr	
Mammoth	b	AVdivi	10	080186	0330	84	51.4	tr	
Mammoth	b	AVdivi	10	080186	0730	23	19.7	tr	
Mammoth	b	AVdivi	10	080186	1130	24	27.8	tr	
Mammoth	b	AVdivi	10	080186	1530	260	375		
Mammoth	b	AVdivi	10	080186	1930	43	55.8		
Mammoth	b	AVdivi	10	080186	2330	85	78.9		
Mammoth	b	AVdivi	10	080286	0330	65	56.4		
Mammoth	b	AVdivi	10	080286	0730	150	130		
Mammoth	b	AVdivi	10	080286	1530	270	200		
Mammoth	b	AVdivi	10	080286	1930	210	158		
Mammoth	b	AVdivi	10	080286	2330	150	103		
Mammoth	b	AVdivi	10	080386	0330	180	129		
Mammoth	b	AVdivi	10	080386	0730	200	140		
Mammoth	b	AVdivi	10	080386	1130	260	238		
Mammoth	b	AVdivi	10	080386	1530	500	415		
Miller	ab	rd	11	073086	1230	0.6	2.7	nd	
Miller	ab	rd	11	073086	1800	0.5	1.21	nd	
Miller	ab	rd	11	073186	0855	0.4	0.86	tr	
Miller	ab	rd	11	073186	1255	0.5	3.96		
Miller	ab	rd	11	073186	1620	0.5	0.32	nd	
Miller	ab	rd	11	080186	0850	0.6	0.36	nd	
Miller	ab	rd	11	080186	1230	0.5	0.45	nd	
AV	eff	ab	rd	12	073086	0900	3400	10600	
AV	eff	ab	rd	12	073086	1300	2500	8640	13
AV	eff	ab	rd	12	073086	1800	3800	14100	27
AV	eff	ab	rd	12	073086	1915	85	1410	
AV	eff	ab	rd	12	073186	0900			4.2
AV	eff	ab	rd	12	073186	1220	7400	18500	49
AV	eff	ab	rd	12	073186	1620	3600	9680	28
AV	eff	ab	rd	12	080186	0850	550	212	
AV	eff	ab	rd	12	080186	1230	7000	19500	41
AV	eff	b	pond	13	073086	0940	450	337	0.05
AV	eff	b	pond	13	073086	1330	500	386	tr
AV	eff	b	pond	13	073086	1805	600	526	tr
AV	eff	b	pond	13	073186	0915	360	276	tr
AV	eff	b	pond	13	073186	1245	4200	334	tr

Appendix 5. Mammoth Creek intensive study				loc no.	date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Location									
AV	eff	b	pond	13	073186	1630	550	477	tr
AV	eff	b	pond	13	080186	0912	290	212	tr
AV	eff	b	pond	13	080186	1255	260	215	tr
AV	eff	a	Mammoth	14	073086	1030	450	309	tr
AV	eff	a	Mammoth	14	073086	1350	500	375	0.05
AV	eff	a	Mammoth	14	073086	1825	550	430	tr
AV	eff	a	Mammoth	14	073186	0945	350	235	tr
AV	eff	a	Mammoth	14	073186	1320	390	277	tr
AV	eff	a	Mammoth	14	073186	1705	390	287	tr
AV	eff	a	Mammoth	14	080186	0935	230	163	tr
AV	eff	a	Mammoth	14	080186	1320	250	198	
Mammoth		ab	AVeff	15	073086	1045	85	48.5	tr
Mammoth		ab	AVeff	15	073086	1350	70	36.8	tr
Mammoth		ab	AVeff	15	073086	1825	150	108	tr
Mammoth		ab	AVeff	15	073186	0945	75	40.1	tr
Mammoth		ab	AVeff	15	073186	1310	70	46.5	tr
Mammoth		ab	AVeff	15	073186	1705	50	38.9	tr
Mammoth		ab	AVeff	15	080186	1005	55	27.3	tr
Mammoth		ab	AVeff	15	080186	1315	45	24.6	tr
Mammoth	b	AV	eff	16	073086	1115	300	197	tr
Mammoth	b	AV	eff	16	073086	1400	330	220	tr
Mammoth	b	AV	eff	16	073086	1830	400	296	tr
Mammoth	b	AV	eff	16	073186	0950	240	152	tr
Mammoth	b	AV	eff	16	073186	1340	230	170	tr
Mammoth	b	AV	eff	16	073186	1700	250	203	tr
Mammoth	b	AV	eff	16	080186	0940	140	112	tr
Mammoth	b	AV	eff	16	080186	1325	140	112	tr
Dugas	b	sluice		17	073086	0950	1000	3900	3.5
Dugas	b	sluice		17	073086	1330	18900	36400	82
Dugas	b	sluice		17	073086	1805	14600	34000	97
Dugas	b	sluice		17	073186	0910	17100	33600	92
Dugas	b	sluice		17	073186	1245	17900	35400	98
Dugas	b	sluice		17	073186	1635	16800	33000	120
Dugas	b	sluice		17	080186	0915	12900	27000	69
Dugas	b	sluice		17	080186	1355	13100	37500	80
Dugas	ab	1st pnd		17	073186	1230	12800	33100	
Dugas	b	1st pnd		17	073186	1250	5400	7370	
Dugas	ab	2nd pnd		17	073186	1305	7300	10700	
Dugas	b	2nd pnd		17	073186		1000	560	
Dugas	b	3rd pnd		17	073186	1335	800	560	
Dugas	eff	ab mam		18	073086	1350	550	319	tr
Dugas	eff	ab mam		18	073086	1805	600	422	tr

Appendix 5. Mammoth Creek intensive study		Location		loc no.	date	time	turbidity (NTU)	TSS (mg/L)	set. solids (ml/L)
Dugas	eff ab	mam	18	073186	1025	550	308	tr	
Dugas	eff ab	mam	18	073186	1400	650	458	tr	
Dugas	eff ab	mam	18	073186	1800	550	329		
Dugas	eff ab	mam	18	080186	1005	400	247	tr	
Dugas	eff ab	mam	18	080186	1400	400	256	tr	
Mammoth	ab	Dugas	19	073086	1335	210	136	tr	
Mammoth	ab	Dugas	19	073086	1805	290	273	0.05	
Mammoth	ab	Dugas	19	073186	1800	220	177	tr	
Mammoth	a	steese	20	072986	2030	370	257		
Mammoth	a	steese	20	073086	0230	320	233		
Mammoth	a	steese	20	073086	0830	250	179		
Mammoth	a	steese	20	073086	1430	300	204	tr	
Mammoth	a	steese	20	073086	1830	300	213	tr	
Mammoth	a	steese	20	073086	2230	350	255		
Mammoth	a	steese	20	073186	0230	300	202		
Mammoth	a	steese	20	073186	0630	280	195		
Mammoth	a	steese	20	073186	1030	240	152	tr	
Mammoth	a	steese	20	073186	1430	240	162	tr	
Mammoth	a	steese	20	073186	1830	210	162	tr	
Mammoth	a	steese	20	073186	2230	240	235	tr	
Mammoth	a	steese	20	080186	0230	240	166	tr	
Mammoth	a	steese	20	080186	0630	210	149	tr	
Mammoth	a	steese	20	080186	1030	170	118	tr	
Mammoth	a	steese	20	080186	1430	180	124		
Mammoth	a	steese	20	080186	1830	220	187		
Mammoth	a	steese	20	080186	2230	240	168		
Mammoth	a	steese	20	080286	0230	180	142		
Mammoth	a	steese	20	080286	0630	180	117		
Mammoth	a	steese	20	080286	1030	130	84.4		
Mammoth	a	steese	20	080286	1430	140	110		
Mammoth	a	steese	20	080286	1830	140	96.4		
Mammoth	a	steese	20	080286	2230	140	96.4		
Mammoth	a	steese	20	080386	0230	130	81.9		
Mammoth	a	steese	20	080386	0630	190	73.2		
Mammoth	a	steese	20	080386	1030	110	73.6		
Mammoth	a	steese	20	080386	1430	120	88.5		
Mammoth	a	steese	20	080386	1555	130	100		
Big G, Deadwood			25	080386	1233	400	395		
Cacy recycle			25	080286	1030	12300	12700		
Loud cyclone			25	080386	1800	16700	3190		

Appendix 6. Data collected by ADF&G.

Location			Date	Time	Turbidity (NTU)	TSS (mg/l)
A. Faith Creek at Steese						
Faith	at	Steese	052386	1930	110	
Faith	at	Steese	060286	1100	50	319
Faith	at	Steese	060286	1500	60	443
Faith	at	Steese	060286	2100	95	637
Faith	at	Steese	060386	0300	75	490
Faith	at	Steese	060386	0900	24	271
Faith	at	Steese	060386	1500	40	325
Faith	at	Steese	060386	2100	50	297
Faith	at	Steese	060486	0300	37	238
Faith	at	Steese	060486	0900	21	149
Faith	at	Steese	060486	1500	28	174
Faith	at	Steese	060486	2100	60	316
Faith	at	Steese	060586	0300	34	235
Faith	at	Steese	060586	0900	19	145
Faith	at	Steese	060586	1500	30	137
Faith	at	Steese	060586	2100	65	326
Faith	at	Steese	060686	0300	55	339
Faith	at	Steese	060686	0900	28	222
Faith	at	Steese	061686	1345	7.9	
Faith	at	Steese	061986	1200	15	111
Faith	at	Steese	061986	1800	7.0	32.1
Faith	at	Steese	062086	0000	4.7	20.0
Faith	at	Steese	062086	0600	4.4	17.6
Faith	at	Steese	062086	1200	3.2	13.0
Faith	at	Steese	062086	1800	3.4	9.3
Faith	at	Steese	062186	0000	4.0	12.5
Faith	at	Steese	062186	0600	4.7	12.2
Faith	at	Steese	062186	1200	4.2	6.1
Faith	at	Steese	062186	1800	7.2	20.2
Faith	at	Steese	062286	0000	34	122
Faith	at	Steese	062286	0600	23	71.7
Faith	at	Steese	062286	1200	17	56.6
Faith	at	Steese	062286	1800	10	44.4
Faith	at	Steese	062386	0000	8.7	30.7
Faith	at	Steese	062386	0600	15	21.7
Faith	at	Steese	062386	1200	21	27.4
Faith	at	Steese	062386	1800	30	34.2
Faith	at	Steese	062486	0000	500	1890
Faith	at	Steese	062486	0600	280	1160
Faith	at	Steese	062486	1200	180	812
Faith	at	Steese	062486	1800	120	345
Faith	at	Steese	062586	0000	61	494
Faith	at	Steese	062586	0600	58	231

Appendix 6. Data collected by ADF&G.				Turbidity	TSS	
Location		Date	Time	(NTU)	(mg/l)	
Faith	at	Steese	062586	1200	45	195
Faith	at	Steese	062586	1800	45	337
Faith	at	Steese	062686	0000	45	208
Faith	at	Steese	062686	0600	30	114
Faith	at	Steese	062686	1200	30	80.2
Faith	at	Steese	062686	1800	34	90.0
Faith	at	Steese	062786	0100	40	78.6
Faith	at	Steese	062786	0600	45	70.2
Faith	at	Steese	062786	1200	60	91.6
Faith	at	Steese	062786	1800	50	75.0
Faith	at	Steese	062886	0000	85	102
Faith	at	Steese	062886	0600	65	75.2
Faith	at	Steese	062886	1200	60	80.8
Faith	at	Steese	062886	1800	26	44.9
Faith	at	Steese	062986	0000	15	33.0
Faith	at	Steese	062986	0600	10	19.2
Faith	at	Steese	062986	1200	8.5	19.8
Faith	at	Steese	062986	1800	8.3	18.8
Faith	at	Steese	063086	0000	7.4	12.8
Faith	at	Steese	063086	0600	5.2	11.8
Faith	at	Steese	063086	1200	12	16.8
Faith	at	Steese	063086	1800	14	17.0
Faith	at	Steese	070186	0000	14	14.4
Faith	at	Steese	070186	0600	11	12.7
Faith	at	Steese	070186	1200	18	20.0
Faith	at	Steese	070186	1800	21	17.5
Faith	at	Steese	070286	0000	23	25.5
Faith	at	Steese	070286	0600	23	14.2
Faith	at	Steese	070286	1200	36	37.4
Faith	at	Steese	070286	1800	28	37.9
Faith	at	Steese	070386	0000	28	35.8
Faith	at	Steese	070386	0600	45	57.0
Faith	at	Steese	070386	1200	35	40.3
Faith	at	Steese	070386	1800	27	31.7
Faith	at	Steese	070486	0000	30	34.4
Faith	at	Steese	070486	0600	29	38.8
Faith	at	Steese	070486	1200	45	49.2
Faith	at	Steese	070486	1800	40	43.6
Faith	at	Steese	070586	0000	16	67.0
Faith	at	Steese	070586	0600	9.7	10.5
Faith	at	Steese	070586	1200	8.9	26.9
Faith	at	Steese	070586	1800	11	10.0
Faith	at	Steese	070686	0000	19	18.2
Faith	at	Steese	070686	0600	19	14.6
Faith	at	Steese	070686	1200	19	6.0
Faith	at	Steese	070686	1800	28	15.4.
Faith	at	Steese	070886	1123	26	
Faith	at	Steese	071586	1800	40	30.4

Appendix 6. Data collected by ADF&G.

Location			Date	Time	Turbidity (NTU)	TSS (mg/l)
Faith	at	Steese	071686	0000	45	22.2
Faith	at	Steese	071686	0600	50	21.4
Faith	at	Steese	071686	1200	39	21.8
Faith	at	Steese	071686	1800	38	14.4
Faith	at	Steese	071786	0000	260	186
Faith	at	Steese	071786	0600	450	451
Faith	at	Steese	071786	1200	60	49.1
Faith	at	Steese	071786	1800	250	149
Faith	at	Steese	071886	0000	200	118
Faith	at	Steese	071886	0600	450	313
Faith	at	Steese	071886	1200	600	620
Faith	at	Steese	071886	1800	90	162
Faith	at	Steese	071986	0000	32	62.6
Faith	at	Steese	071986	0600	300	301
Faith	at	Steese	071986	1200	500	423
Faith	at	Steese	071986	1800	85	124
Faith	at	Steese	072086	0000	550	1510
Faith	at	Steese	072086	0600	200	1040
Faith	at	Steese	072086	1200	260	1300
Faith	at	Steese	072086	1800	120	671
Faith	at	Steese	072186	0000	75	438
Faith	at	Steese	072186	0600	75	343
Faith	at	Steese	072186	1200	50	333
Faith	at	Steese	072186	1800	45	340
Faith	at	Steese	072286	0000	35	261
Faith	at	Steese	072386	2031	60	
Faith	at	Steese	072486	1200	50	
Faith	at	Steese	072586	0000	38	296
Faith	at	Steese	072586	0600	34	58.2
Faith	at	Steese	072586	1200	29	39.9
Faith	at	Steese	072586	1800	25	34.5
Faith	at	Steese	072686	0000	23	27.4
Faith	at	Steese	072686	0600	21	26.6
Faith	at	Steese	072686	1200	15	21.4
Faith	at	Steese	072686	1800	15	22.0
Faith	at	Steese	072786	0000	32	74.8
Faith	at	Steese	072786	0600	75	122
Faith	at	Steese	072786	1200	22	81.3
Faith	at	Steese	072786	1800	13	46.8
Faith	at	Steese	072886	0000	14	36.9
Faith	at	Steese	072886	0600	17	70.3
Faith	at	Steese	072886	1200	13	22.7
Faith	at	Steese	072886	1800	14	20.0
Faith	at	Steese	072986	0000	16	21.4
Faith	at	Steese	072986	0600	24	24.9
Faith	at	Steese	072986	1200	18	17.6
Faith	at	Steese	072986	1800	19	17.2
Faith	at	Steese	073086	0000	20	17.4

Appendix 6. Data collected by ADF&G.

Location			Date	Time	Turbidity (NTU)	TSS (mg/l)
Faith	at	Steese	073086	0600	26	19.8
Faith	at	Steese	073086	1200	25	17.2
Faith	at	Steese	073086	1800	23	17.8
Faith	at	Steese	073186	0000	32	21.2
Faith	at	Steese	073186	0600	34	31.0
Faith	at	Steese	073186	1200	32	39.5
Faith	at	Steese	073186	1800	27	28.2
Faith	at	Steese	080186	0000	32	60.7
Faith	at	Steese	080186	0600	50	199
Faith	at	Steese	080186	1200	34	133
Faith	at	Steese	080186	1800	50	479
Faith	at	Steese	080286	0000	60	407
Faith	at	Steese	080286	0600	60	294
Faith	at	Steese	080286	1200	70	485
Faith	at	Steese	080286	1800	65	452
Faith	at	Steese	080386	0000	45	251
Faith	at	Steese	080386	0600	31	100
Faith	at	Steese	080686	1800	7.4	47.4
Faith	at	Steese	080786	0000	17	110
Faith	at	Steese	080786	0600	18	84.8
Faith	at	Steese	080786	1200	13	80.3
Faith	at	Steese	080786	1800	13	86.3
Faith	at	Steese	080886	0000	13	72.2
Faith	at	Steese	080886	0600	13	63.7
Faith	at	Steese	080886	1200	9.4	52.0
Faith	at	Steese	080886	1800	12	55.9
Faith	at	Steese	080986	0000	11	49.8
Faith	at	Steese	080986	0600	9.5	44.3
Faith	at	Steese	080986	1200	9.2	31.8
Faith	at	Steese	080986	1800	9.9	37.8
Faith	at	Steese	081086	0000	12	38.0
Faith	at	Steese	081086	0600	9.2	38.2
Faith	at	Steese	081086	1200	14	27.6
Faith	at	Steese	081086	1800	14	32.5
Faith	at	Steese	081186	0000	23	33.7
Faith	at	Steese	081186	0600	23	36.5
Faith	at	Steese	081186	1200	35	52.4
Faith	at	Steese	081186	1800	40	53.4
Faith	at	Steese	081286	0000	35	45.7
Faith	at	Steese	081286	0600	24	35.0
Faith	at	Steese	081286	1200	39	47.1
Faith	at	Steese	081286	1800	31	41.9
Faith	at	Steese	081386	0000	55	52.8
Faith	at	Steese	081386	0600	55	55.4
Faith	at	Steese	081386	1200	40	40.6
Faith	at	Steese	081486	1700	50	104
Faith	at	Steese	081586	0000	50	50.5
Faith	at	Steese	081586	0600	50	49.5

Appendix 6. Data collected by ADF&G.						
Location		Date	-Time	Turbidity (NTU)	TSS (mg/l)	
Faith	at	Steese	081586	1200	45	42.4
Faith	at	Steese	081586	1800	60	51.2
Faith	at	Steese	081686	0000	45	36.6
Faith	at	Steese	081686	0600	15	16.7
Faith	at	Steese	081686	1200	26	20.7
Faith	at	Steese	081686	1800	29	32.8
Faith	at	Steese	081786	0000	50	43.5
Faith	at	Steese	081786	0600	55	43.5
Faith	at	Steese	081786	1800	45	42.9
Faith	at	Steese	081886	0000	26	34.7
Faith	at	Steese	081886	0600	35	23.1
Faith	at	Steese	081886	1200	21	31.6
Faith	at	Steese	081886	1800	11	25.3
Faith	at	Steese	081986	0000	11	13.3
Faith	at	Steese	081986	0600	20	19.2
Faith	at	Steese	081986	1200	33	34.9
Faith	at	Steese	081986	1800	40	45.0
Faith	at	Steese	082086	0000	37	35.1
Faith	at	Steese	082086	0600	25	25.8
Faith	at	Steese	082086	1200	19	19.6
Faith	at	Steese	082086	1800	36	80.3
Faith	at	Steese	082186	0000	2 2 0	1360
Faith	at	Steese	082186	0600	340	3180
Faith	at	Steese	082186	1200	2900	25300
Faith	at	Steese	082186	1815	420	2180
Faith	at	Steese	082286	0000	3000	31600
Faith	at	Steese	082286	0600	1600	18500
Faith	at	Steese	082286	1745	2100	21700
Faith	at	Steese	082886	1800	50	1950
Faith	at	Steese	082986	0000	36	574
Faith	at	Steese	082986	0600	19	270
Faith	at	Steese	082986	1200	15	169
Faith	at	Steese	082986	1800	15	153
Faith	at	Steese	083086	0000	21	134
Faith	at	Steese	083086	0600	22	126
Faith	at	Steese	083086	1200	22	156
Faith	at	Steese	083086	1800	31	490
Faith	at	Steese	083186	0000	40	620
Faith	at	Steese	083186	0600	32	339
Faith	at	Steese	083186	1200	40	526
Faith	at	Steese	083186	1800	50	1030
Faith	at	Steese	090186	0000	60	1230
Faith	at	Steese	090186	0600	60	475
Faith	at	Steese	090186	1200	45	967
Faith	at	Steese	090186	1800	40	152
Faith	at	Steese	090286	0000	31	59.1
Faith	at	Steese	090286	0600	24	53.7
Faith	at	Steese	090286	1200	26	39.1

Appendix 6. Data collected by ADF&G.
Location Date -Time

				Turbidity (NTU)	TSS (mg/l)
Faith	at	Steese	090286	1800	36 147
Faith	at	Steese	090386	0000	38 556
Faith	at	Steese	090386	0600	45 818
Faith	at	Steese	090386	1200	34 552
Faith	at	Steese	090486	1800	24 337
Faith	at	Steese	090586	0000	23 107
Faith	at	Steese	090586	0600	16 30.2
Faith	at	Steese	090586	1200	10 41.5
Faith	at	Steese	090586	1800	8.0 43.6
Faith	at	Steese	090686	0000	10 28.0
Faith	at	Steese	090686	0600	8.0 28.2
Faith	at	Steese	090686	1200	7.1 51.9
Faith	at	Steese	090686	1800	8.9 40.7
Faith	at	Steese	090786	0000	9.0 12.9
Faith	at	Steese	090786	0600	7.8 10.4
Faith	at	Steese	090786	1200	7.4 17.0
Faith	at	Steese	090786	1800	9.0 19.8
Faith	at	Steese	090886	0000	9.4 17.0
Faith	at	Steese	090886	0600	7.7 11.9
Faith	at	Steese	090886	1200	7.5 11.2
Faith	at	Steese	090886	1210	5.6
Faith	at	Steese	090886	1800	13 23.0
Faith	at	Steese	090986	0000	12 15.7
Faith	at	Steese	090986	0600	8.8 18.0
Faith	at	Steese	090986	1200	10 33.5
Faith	at	Steese	090986	1800	7.1 18.0
Faith	at	Steese	091086	0000	8.6 11.4
Faith	at	Steese	091086	0600	8.8 18.1
Faith	at	Steese	091086	1800	6.2 10.1
Faith	at	Steese	091186	0000	6.4 10.0
Faith	at	Steese	091186	0600	6.5 8.1
Faith	at	Steese	091186	1200	5.4 7.5
Faith	at	Steese	091186	1800	6.2 9.1
Faith	at	Steese	091286	0000	8.1 6.9
Faith	at	Steese	091286	0600	6.8 6.5
Faith	at	Steese	092586	1925	22 11.7

B. Other Chatanika Creek Drainage Data

McManus	ab	Faith	072486	1200	1.2	nd
Chatanika	Cr	at Sourdgh	072486	1300	21	10.4
Chatanika	at	39m	072486	1330	4.9	2.92
Faith	b	final pond	090486			15.8
Faith	at	final seepage	090486			49.7
Faith	ab	Kop pond	090486	1255		1280
Faith	at	rd crossing	090486	1348		28.3
Faith	at	road	090486	1415		16.3

Appendix 6. Data collected by ADF&G.

Location	Date	Time	Turbidity (NTU)	TSS (mg/l)
c. Data for Goldstream valley sites, 1986				
First Chance Cr	090586		7.3	6.8
Flume a Steese	090586		2.5	2.38
Goldstream a Std Cr Rd	090586		31.3	36.2
Goldstream a Std Cr Rd	092686		90	61.8
Goldstream a Sheep Cr Rd	090586		120	64
Goldstream a Sheep Cr Rd	092685	1145	260	202
Goldstream a Sheep Cr Rd	092685	1800	260	175
Goldstream a Sheep Cr Rd	092686		230	138
Goldstream a Sheep Cr Rd	092785	0000	250	124
Goldstream a Sheep Cr Rd	092786	0600	260	174
Goldstream a Sheep Cr Rd	092786	1200	270	186
Goldstream a Sheep Cr Rd	092786	1800	290	232
Goldstream a Sheep Cr Rd	092886	0000	280	202
Goldstream a Sheep Cr Rd	092886	0600	250	170
Goldstream a Sheep Cr Rd	092886	1200	250	169
Goldstream a Sheep Cr Rd	092886	1800	260	161
Goldstream a Sheep Cr Rd	092986	0000	250	174
Goldstream a Sheep Cr Rd	092986	0600	250	146
Goldstream a Sheep Cr Rd	092986	1200	240	166
Goldstream a Sheep Cr Rd	092986	1800	240	160
Goldstream a Sheep Cr Rd	093086	0000	240	148
Goldstream a Sheep Cr Rd	093086	0600	230	144
Goldstream a Sheep Cr Rd	093086	1200	230	152
Goldstream a Sheep Cr Rd	093086	1800	220	143
Goldstream a Sheep Cr Rd	100186	0000	210	130
Goldstream a Sheep Cr Rd	100186	0600	210	128
Goldstream a Sheep Cr Rd	100186	1200	210	131
Goldstream a Sheep Cr Rd	100186	1800	210	135
Goldstream a Sheep Cr Rd	100286	0000	220	155
Goldstream a Sheep Cr Rd	100286	0600	230	151
Goldstream a Sheep Cr Rd	100286	1200	230	167
Goldstream a Sheep Cr Rd	100286	1800	240	154
Goldstream a Sheep Cr Rd	100386	0000	230	151
Goldstream a Sheep Cr Rd	100386	0600	240	215
Goldstream Creek	052086	1350	210	524
Goldstream a Ballaine Rd	090586		180	129
Goldstream a Gdstm Cr R	090586		330	261
Pedro a Gld Pan Site	090586		110	84
Pedro a Gld Pan Site	092685		65	57.1

Appendix 6. Data collected by ADFCG.
Location Date -Time

Location	Date	-Time	Turbidity (NTU)	TSS (mg/l)
Pedro a 1st Chnc Cr	090586		330	201
Pedro Automatic Sample	092685	1040	80	79.6
Pedro Automatic Sample	092685	1800	360	428
Pedro Automatic Sample	092785	0000	800	824
Gilmore Cr	052086	1345	75	98.8
Gilmore a trk st	090586		1200	722
Steamboat Cr a Steese	090586		26	282

D. Break Up Samples

Location	Date	Time	Turbidity (NTU)	TSS (mg/L)	SS (ml/L)
WF Tolovana R.	052086	1002	1.6	6	tr
Tolovana River 2	052086	1035	9.3	24.8	0.05
Livengood Creek	052086	1125	170	524	0.55
Tolovana River	052086	1145	1.9	9.8	tr
Tatalina River	052086	1205	1.4	3.6	tr
Chatanika River	052086	1320	5.1	32	0.1
Gilmore Creek	052086	1345	75	98.8	0.15
Goldstream Creek	052086	1350	210	524	1.1
Little Chena	052086	1415	14	64.9	0.2
Chena River 1	052086	1417	8.8	114	0.3
Chena River 2	052086	1510	5.7	17.5	0.05
Cripple Creek	052086	1516	50	233	0.5
Chatanika a 39m	060686		14	11.4	tr
Chatanika a 55m	060686		10	42.2	tr
Deep ab Dale	060686		1.7	2.63	nd
Deep at Faith	060686		120	351	0.25
Faith a low rd	060686		18	88.6	0.05
Faith ab deep cr	060686		18	85.4	0.05
McManus Cr	060686		1.4	11.4	tr
Deep Cr lmi us	060686		100	613	0.8
Deep Cr at FCR	060686		140	832	1.1
Faith b Deep Cr	060686		13	90.7	tr

Appendix 7. Miscellaneous data

A. Data collected by DEC, June 5-6, 1986

Location	Date	Turbidity (NTU)	TSS (mg/L)
birch at bridge	060386	90	264
birch at bridge	060386	85	235
Deadwood a chsr	060386	65	190
Deadwood ab mine	060386	60	376
bedrock	060386	0.6	3.6
bedrock	060386	1.5	0.8
boulder at gage	060386	3.6	11.2
boulder at gage	060386	3.6	9.9
crooked a cen	060386	85	151
crooked a cen	060386	110	165
deadwood a chsr	060386	60	391
deadwood ab mine	060386	60	301
faith a steese	060286	70	306
ketchem a chsr	060386	95	335
ketchem a chsr	060386	90	333
mammoth a steese	060386	200	
mammoth a steese	060386	250	777
porcupine a mth	060386	70	191
porcupine a mth	060386	80	206
faith a rd cross	060286	40	151
faith a rd cross	060286	35	147

B. Data from **ADF&G** and DOM Helicopter flyover of Birch Creek

Location	Date	Time	Turbidity (NTU)	TSS (mg/L)	SS (ml/L)
birch ab clums f	062486	1500	95	311	0.35
birch ab harriss	062486	1500	95	310	0.2
birch at butte	062486	1300	350	889	0.7
birch at harring	062486	1345	140	392	0.4
butte a mth	062486	1300	270	1570	2.0
clums fk a birch	062486	1400	14	83	
eagle at glddust	062486	1300	450	962	0.7
gold dust ab mth	062486	1300	140	472	0.4
harrington fk	062486	1345	11	59	
harrison a mth	062486	1500	50	251	0.3
mammoth #3	062486	1438	38	208	0.1
mammoth #5	062486	1438	40	134	0.1
millier #2	062486		39	148	0.05
portage cr a ml	062486	1000	65	119	tr

Appendix 7. Miscellaneous data.

C. Turbidity data from Tolovana River above mining

Location			Date	Time	Turbidity (NTU)
Tolovana	ab	Wilber	061386	1130	26
Tolovana	ab	Wilber	061486	1030	12
Tolovana	ab	Wilber	062086		5.9
Tolovana	ab	Wilber	062686		49
Tolovana	ab	Wilber	072386	1530	3.0
Tolovana	ab	Wilber	072786	1650	13
Tolovana	ab	Wilber	072886	1715	3.3
Tolovana	ab	Wilber	073086	1700	20
Tolovana	ab	Wilber	073186	1000	190
Tolovana	ab	Wilber	073186	2200	75
Tolovana	ab	Wilber	080186	0900	55
Tolovana	ab	Wilber	080286	0930	70
Tolovana	ab	Wilber	080386	1130	9.8
Tolovana	ab	Wilber	080486	1730	5.8
Tolovana	ab	Wilber	080586	0900	4.8
Tolovana	ab	Wilber	080686	1900	3.1
Tolovana	b	Wilber	073186	1000	210

D. Turbidity data collected by Division of Parks

Location				Date	Time	Turbidity (NTU)
Chena	a	39m	CHSR	060886	2025	0.6
Chena	a	39m	CHSR	061186	2030	3.0
Chena	a	39m	CHSR	061486	2125	1.8
Chena	a	39m	CHSR	061686	2030	1
Chena	a	39m	CHSR	061886	2100	3.5
Chena	a	39m	CHSR	062186	1900	5.3
Chena	a	39m	CHSR	062286	2130	1.5
Chena	a	39m	CHSR	062386	2045	29
Chena	a	39m	CHSR	062486	1950	23
Chena	a	39m	CHSR	062586	1830	6.5
Chena	a	39m	CHSR	062886	1830	1.1
Chena	a	39m	CHSR	062986	2030	0.7
Chena	a	39m	CHSR	070486	1800	0.5
Chena	a	39m	CHSR	070586	1900	0.8
Chena	a	39m	CHSR	071586	0905	0.5
Chena	a	39m	CHSR	071686	1845	1.1
Chena	a	39m	CHSR	071986	0930	5.9
Chena	a	39m	CHSR	072086	0900	65

Appendix 7. Miscellaneous data.

Chatanika	at	llm	060686	0830	4
Chatanika	at	llm	060786	2100	4.3
Chatanika	at	llm	060886	1700	12
Chatanika	at	llm	061086	1320	8.2
Chatanika	at	llm	061186	1330	80
Chatanika	at	llm	061486	2125	6.4
Chatanika	at	llm	061686	1300	3.1
Chatanika	at	llm	061886	1330	3.3
Chatanika	at	llm	062186	1400	1.6
Chatanika	at	llm	062886	1500	1.6
Chatanika	at	llm	070686	1930	1.4
Chatanika	at	llm	071286	0934	2.9
Chatanika	at	39m	060786	1445	7.1
Chatanika	at	39m	061386	2130	6.3
Chatanika	at	39m	061486	1950	5.9
Chatanika	at	39m	062286	1300	2.1
Chatanika	at	39m	062586	1400	18
Chatanika	at	39m	062786	2045	1.9
Chatanika	at	39m	070386	1915	1.2
Chatanika	at	39m	070586	2205	2.2
Chatanika	at	39m	071186	0930	1.2
Chatanika	at	39m	072586	0930	1.4

E. Turbidity data from rural villages

Location			Date	Time	Turbidity (NTU)
Birch	at	BCV	053086	1600	7.9
Koyukuk	at	Evnsvl	060686	0830	130
Koyukuk	at	Evnsvl	061086	0800	230
Koyukuk	at	Evnsvl	061286	0800	210
Koyukuk	at	Evnsvl	061686	0800	100
Koyukuk	at	Evnsvl	061786	0800	65
Koyukuk	at	Evnsvl	061886	0800	70
Koyukuk	at	Evnsvl	062386	0800	17
Koyukuk	at	Evnsvl	062486	0800	27
Koyukuk	at	Evnsvl	062586	0800	210
Koyukuk	at	Evnsvl	062686	0800	190
Koyukuk	at	Evnsvl	062686	0800	50
Koyukuk	at	Evnsvl	070286	0800	2.8
Koyukuk	at	Evnsvl	070786	0700	1.3
Koyukuk	at	Evnsvl	071486	0800	14
Koyukuk	at	Evnsvl	072186	0700	5.8
Koyukuk	at	Evnsvl	080486	0800	110
Koyukuk	at	Evnsvl	101486	0800	5.0
Tozitna	River		062486	1533	4.1

Appendix 8. Description of mining operations in Mammoth Creek intensive study

Information in this appendix was prepared by Judd Peterson, Alaska Division of Mining.

1. Great American Mining (GAM).

Location: Independence Creek

Description of operation: Cat pushes to one $\frac{3}{4}$ yard drag line which feeds **trommel/sluiice** setup. Tailing and oversize are pushed to tailings piles by cat.

Water usage of wash plant: 2100-2200 gallons per minute (gpm)

Hours of operation per day: 10

Cubic yards process per hour: 100

Percent recycle: 100

Treatment system: GAM uses a presettling pond at the start of tails race just below the trommel. From there all effluent goes into one large settling pond with a divider between the inflow and the pump suction line. Sole discharge is seepage into Independence Creek.

2. Don May

Location: Independence Creek

Cubic yards process per hour: Operation did not run while study was being conducted. He started sluicing a few days after the finish of the sampling period.

3. Dick Loud

Location: Mammoth Creek below Mastodon Creek

Description of operation: Two D-9 cats push pay to drag line which feeds double deck vibratory screen and punch plate wash plant. Oversize is fed onto a staking conveyor. Sluice tailings ($\frac{1}{2}$ inch minus) are fed to a large hopper and sand screw assembly for dewatering.

Water usage of wash plant: 1840 gpm to plant from pump in recycle

Appendix 8. Description of mining operations in Mammoth Creek intensive study.

pond. In addition, 350 gpm is pumped to wash plant from cyclones. 370 gpm of makeup water is pumped into the recycle pond from Mammoth Creek.

Cubic yards process per hour: 100-150

Percent recycle: 100 percent through use of sand screw and cyclones.

Treatment system: He constructed a '100 percent recycle setup that he hoped would put all of the 1/2 inch minus solids on the tailings piles by use of a slurry discharge line from the cyclones. He found out that the cyclones would not separate out minus 200 mesh solids which ended up in his plastic lined recycle pond. The pond silted up completely after processing 40,000 cubic yards of pay and had to be mucked out with a dragline. He discovered that the recycle system needed thirty percent makeup water. The problem became what to do with the thirty percent of the process water he needed to be rid of. He lost some of this through seepage loss into Mammoth Creek. The rest was pumped into a slurry line onto the tailings piles.

4. Alaska Ventures.

Location: Mammoth Creek above Miller Creek

Description of operation: Operation uses caterpillars to rip and push pay to a three yard backhoe.

Water usage of wash plant: 1620 gpm

Cubic yards process per hour: 270

Percent recycle: none

Treatment system: One very large pond located approximately 1/2 mile below plant. This pond is approximately 600-800' by 150-200'. The dam at the lower end is approximately 15 feet high. Outflow from this pond is by pipe discharge and seepage. Effluent flows from there in a channel cut through old mine tailings before discharge into Mammoth Creek.

5. Dugas

Location: Mammoth Creek below Miller Creek

Description of operation: A rubber tired caterpillar is used to push pay to a hopper which has a conveyor feed to the top of a single deck

Appendix 8. Description of mining operations in Mammoth Creek intensive study.

vibratory screen wash plant and sluice box. Tails and oversize are hauled to tailings piles with a 966 loader.

Water usage of wash **plant**: unknown.

Cubic yards **process per** hour: 75

Percent **recycle**: none

Treatment system: From the end of the slice box, the tails race extends down the left limit of the Mammoth Creek valley for about 3/4 mile to the first pond. This pond is an old cut, approximately 600' by 150' in size. The lower end of the cut is dammed to back up the water. This dam has no surface overflow and all discharge is by seepage at the base of the dam. From there the effluent runs into another old cut about 500' by 150'. This cut has no dam at the lower end but water is impounded by the depression of the cut. From here the effluent flows into a third old cut about 1000 feet downstream. This pond is about 300' by 150'. Outflow from this pond is seepage flow into a long (400'), narrow (10-15') pond with a dam at the end. Overflow from this pond flows into a series of 5 shallow pan ponds 25-50' in diameter spread over a distance of 1500 feet. These ponds are built on old leveled tailings. Discharge from these ponds flows onto the plain of Mammoth Creek. This is a long reach (approximately 2000 feet) of vegetative filtration and shallow creek flow before the discharge reaches Mammoth Creek. Total length of this treatment system is approximately 2 miles.

Appendix 9. Specific Locations of Study Sites

Map No.	Site Name	Full Name	MTRS Description
1	Birch A Brdg	Birch Creek at Steese Hwy Bridge	50 ft. above bridge on left bank in SE¼, NE¼, sec 1, T10N, R16E, FM
2	Birch ab CC	Birch Creek above Crooked Creek	100 ft. above confluence with Crooked Creek in NW¼, NW¼, sec 9 T9N, R16E, FM
3	Crooked a Mth	Crooked Creek above mouth	1/4 mile above confluence with Birch Cr on left bank in NE), NE¼, sec 8, T9N, R16E, FM
4	Albert	Albert Creek at Steese Highway	at the Steese Highway Bridge in NW¼, SW¼, sec 19, T9N, R15E, FM
5	Ketchem a CHSR	Ketchem Creek at the Circle Hot Springs Road	100 ft above bridge on right bank in SE¼, NE¼, sec 20, T8N, R15E, FM
6	Deadwood a CHSR	Deadwood Creek at the Circle Hot Springs Road	at the bridge on right bank in NE¼, NE¼, sec 12 T8N, R14E, FM
7	Crooked a Cen	Crooked Creek at Central	above bridge on left bank in SW¼, SE¼, sec 27, T9N, R14E, FM
8	Boulder a gage	Boulder Creek above the USGS gage	above USGS gage in SW), NW¼, sec 32, T9N, R14E, FM
9	Bedrock	Bedrock Creek below BLM Campground	200 ft below campground in SW¼, SW¼, sec 32, T9N, R13E, FM
10	Mammoth a Steese	Mammoth Creek at the Steese Hwy bridge	50 ft below bridge on right bank in SE¼, NE¼, sec 1, T8N, R13E, FM

Appendix 9. Specific locations of study sites.

11 Porcupine a mth	Porcupine above confluence with Mammoth Creek	3/4 mile above con- fluence on right bank in NW¼, NE¼, sec 1, T8N R12E, FM
12 Birch ab 12mile	Birch Creek above Twelvemile Creek	1/4 mile above confluence in SW), NW¼, sec 33, T7N, R10E, FM
13 Faith a Steese	Faith Creek at Steese Hwy	above bridge in SE¼, NE¼, sec 6, T5N, R7E, FM